



Advanced Template version: 1.0

[[doc-title]]

[[doc-subtitle]]

[[doc-type]]

[[doc-company]]

[[doc-company-url]]

Document Number: [[doc-id]]

Version: [[doc-version]]

Release Date: [[doc-release-date]]



Document History

Author Name: [[doc-author-name]]

Author Contact: [[doc-author-email]]

Document Revision

Version Number	Release Date	Status	Change Description	Author
[[doc-version]]	[[doc-release-date]]	Draft	[[doc-change-description]]	[[doc-author-name]]

Intellectual Property Rights

This document is exclusive property of [[doc-company]] and all rights are reserved.



Table of Contents

Introduction 6

References 6

Markdown1 8

PUZZLES CLOUD MARKDOWN FILE HEADING 1	8
Welcome to the puzzles cloud md file HEADING 2	8
Let's start with stupid jokes HEADING 3	8
Let me tell you stupid joke on German: HEADING4	8
Let's switch to the Czech language HEADING 4	8
Real Czech language HEADING 5	8
Longest Serbian word he he HEADING 1	8
Serbian literature HEADING 2	8
It's enough, lets start with some smart things HEADING 1	8

Markdown2 9

Formatted Text Examples	9
Font buttons:	9
Text Format:	9
Text Justification:	9
Useful markdown links:	9
I just have to store some code here, if you don't mind	10
I'll put it here	10
And also here	10
You know the process...	10

Markdown3 10

Edge Service	10
TODO	10
TODO version 1.0	10
TODO version 1.0-next	10
Test environment and credentials	10
Edge Service Registry	10
Edge Service Relay	10
Edge Service Client	10
ReST API	11
Login	11
Login request	11
Login response	11
Cookies	11
Logout	11
Logout request	11
Logout response	11
Voucher list	11
Voucher list request	11
Voucher list response	11
Voucher detail	11
Voucher detail request	11
Voucher detail response	11



Voucher order	12
Voucher order request	12
Voucher order response	12
Voucher order detail	12
Voucher order detail request	12
Voucher order detail response	12
Provider Text	13
Provider Text request	13
Provider Text response	13
Content	13
Content request	13
Content response	13
Verification	13
Verification request by phone number	13
Verification by phone number response	13
Verification request by sms	13
Verification by sms number response	13
Cookies	13
Cookies request	13
Cookies response	13
Documentation	13
Documentation request	13
Documentation response	13
i18n internationalization	14
i18n request	14

Markdown4 14

From today's featured article	14
Did you know ...	14
In the news	14
On this day	14
March 2	14
Today's featured picture	15
Armed conflicts and attacks	15
Health and environment	15

Markdown5 15

#####	19	15
####	15	
#####	15	
#####	16	
Here are some test codes	16	
Here is some youtube video	16	

h1 Heading 8-) 16

h2 Heading	16
h3 Heading	16
h4 Heading	16
h5 Heading	16
h6 Heading	16
Horizontal Rules	16



Typographic replacements	16
Emphasis	17
Blockquotes	17
Lists	17
Code	17
Tables	17
Links	18
Images	18
Plugins	20
Emojies	20
Subscript / Superscript	20
<ins>	20
<mark>	21
Footnotes	21
Definition lists	21
Abbreviations	21
Custom containers	21

Table of Tables

Table 1: Document references	6
------------------------------	---

Table of Figures

Figure 1: Last Page	22
---------------------	----



1 Introduction

1.1 References

Referenced documents in creation of this document are listed in the Table 1.

Document Reference	Document Title	Version	Filename
[1]	[[reference-doc-title]]		[[reference-doc-filename]]
[2]			
[3]			
[4]			
[5]			
[6]			
[7]			
[8]			

Table 1: Document references





*Yep, it's a picture, fool... lol Here you go, **CLICK IT:***

2.2 Markdown2


2.2.1 Formatted Text Examples


Below is an illustration of the Format toolbar used to format text:

Here are some examples of the effects different options have on text:

2.2.1.1 Font buttons:

As well as the standard Font drop down box showing a list of all the fonts on your system and the **Point** size box that allows you to set the font size, two shortcut buttons have been added that allow you to increase the selected text or group of text objects at the press of a button:

 Will increase the font size by 2 points every time you press the button.

 Will decrease the font size by 2 points every time you press the button.

2.2.1.2 Text Format:

The standard text format options are also available for text i.e. **bold**, *italic*, underline and .

 **Text**
 *Text*
 Text
  Text

Note: You can combine any of these formats together, as in the last example above which is a combination of the bold, underline and outline formats.

2.2.1.3 Text Justification:

Text can be aligned to the

1. left,
2. right,
3. centre

or one of the three full justifications: Full Justification, Density Justification and Aspect Justification.

Note: The Full justification spreads the words across the page but does not change the size of them. The Density Justification also spreads the words and does not change their size but puts spaces between the characters in a word. The Aspect Justification spreads the words but stretches the words to fill the space as well.

The Density and Aspect methods can provide some visually interesting effects.

Go back to the top

2.2.2 Useful markdown links:

[Link 1](#)

1. This is link 1

[Link 2](#)

1. This is link 2

[Link 3](#)

1. This is link 3

[Link 4](#)



This is link 4 ordered under link 3

2.2.2.1 I just have to store some code here, if you don't mind

2.2.2.1.1 I'll put it here

LoGiC iS rEaL !!!

```
if(a == 0){ a = 0; }
```

2.2.2.1.2 And also here

It's getting better

```
if (false == true) { // log some message }
```

2.2.2.1.3 You know the process...

I'll just assert and finish this...

```
public void justAssert(){ boolean checkTrue = true; Assert.assertTrue(checkTrue); } //let me return true he he public boolean trueStatement()  
{ return true; }
```

2.3 Markdown3

2.3.1 Edge Service

The Edge Service provides the interface between the public REST API and internal AMQP API.

2.3.1.1 TODO

2.3.1.1.1 TODO version 1.0

[x] Test environment and credentials

[x] specify voucher content fields

[x] specify voucher pricing fields

[x] specify payment method fields

2.3.1.1.2 TODO version 1.0-next

[] refactor entities and apply relationships

[] provide full resource schemas

[] enforce validation of resource schemas

2.3.1.2 Test environment and credentials

TODO

Username	Password	Description
test@test.org	test	just protected
test@gmail.com	test	just testing
testtest	test	qa

2.3.1.3 Edge Service Registry

The Edge Service Registry is responsible to maintain an index of all currently available Edge Services and configure all its known [Load-Balancers] accordingly.

As of writing no hosting solution has been chosen yet. Therefor the actual API which is used to configure the load-balancers remains unspecified for now.

All Edge Service Instances **must** register themselves on the registry on startup and un-register on shutdown.

2.3.1.4 Edge Service Relay

Every Edge Service will be provided with a local relay connecting its instances to the central Message Broker cluster. The message exchange routing of the relay is configured in such a way, that only messages relevant to its connected Edge Services is routed to it from the broker cluster.

See [Message Relay] for more information.

2.3.1.5 Edge Service Client

Each Service that is to be served by the Edge Service is represented by a so-called Edge Service Client. It is responsible to provide the implementation of the public REST API for that given service.

2.3.1.6 ReST API

The Edge Service API acts as translation layer between the Services and the Frontend. The actual logic is implemented in separate [Edge Service Client]s for each individual Service consumed by the API or API endpoint provided by the API, respectively.

All public-facing endpoints **must** adhere to the [JSONAPI] specification and be subject to strict [Access Control].

2.3.1.6.1 Login

2.3.1.6.1.1 Login request

Variables	Description	Example
ICP_SHOP_ID	see [Test environment and credentials]	
ICP_SHOP_PASSPHRASE	see [Test environment and credentials]	
ICP_SHOP_DIGEST	Derived from \${ICP_SHOP_ID} and \${ICP_SHOP_PASSPHRASE}	MzAwMDAwMTY6dG9wLXNIY3JldC1wYXNzcGhyYXNl

```
POST /api/rest/v1/auth/login HTTP/1.1 Authorization: Basic ${ICP_SHOP_DIGEST} Accept: application/vnd.api+json
```

2.3.1.6.1.2 Login response

```
|HTTP/1.1 201 Created Content-Type: application/vnd.api+json
```

2.3.1.6.1.3 Cookies

Name	Value	Domain	Path	Expires	HttpOnly	Secure
SESSION	MmQ5ZjkxOGItMTA5LWVhbnR1bWUwSjE1ZDY5	traster.com	/	1 month	true	false

2.3.1.6.2 Logout

2.3.1.6.2.1 Logout request

Variables	Description	Example
-----------	-------------	---------

POST /api/rest/v1/auth/logout HTTP/1.1 Authorization: No Auth Accept: application/vnd.api+json

2.3.1.6.2.2 Logout response

|HTTP/1.1 204 No Content

2.3.1.6.3 Voucher list

See [VoucherWebList] method in the [Mimas integration] documentation for the source of these fields.

2.3.1.6.3.1 Voucher list request

```
|GET /api/rest/v1/vouchers HTTP/1.1 Authorization: No Auth Accept: application/vnd.api+json
```

2.3.1.6.3.2 Voucher list response

```
|HTTP/1.1 200 OK Content-Type: application/vnd.api+json
```

```
{
  "data": [
    {
      "id": "f634f09f-9a06-4297-a326-0d703938b702",
      "type": "voucher",
      "attributes": {
        "code": "LEBALLINNL10",
        "currency": "EUR",
        "ean-code": "8717472242211",
        "encryption-type": 0,
        "kind": 0,
        "name": "Lebara All-in NL 10 EUR",
        "provider-code": "LEBARA",
        "provider-name": "Lebara",
        "short-name": "All-in NL 10",
        "value": 10.0,
        "price-total": 11.99,
        "price-tax": 0.00,
        "price-fee": 1.99,
        "payment-methods": [
          {
            "wirecard-creditcard": {
              "name": "Credit Card",
              "provider-name": "Wirecard",
              "image-url": "https://wirecard.com/logo.png"
            },
            "wirecard-paypal": {
              "name": "PayPal",
              "provider-name": "Wirecard"
            }
          }
        ],
        "id": "a3473e20-19b4-44fe-8389-67a511854759",
        "type": "voucher",
        "attributes": {
          "code": "LEBALLINNL15",
          "currency": "EUR",
          "ean-code": "8717472242129",
          "encryption-type": 0,
          "kind": 0,
          "name": "Lebara All-in NL 15 EUR",
          "provider-code": "LEBARA",
          "provider-name": "Lebara",
          "short-name": "All-in NL 15",
          "value": 15.0,
          "price-total": 16.99,
          "price-tax": 0.00,
          "price-fee": 1.99,
          "payment-methods": [
            {
              "wirecard-creditcard": {
                "name": "Credit Card",
                "provider-name": "Wirecard",
                "image-url": "https://wirecard.com/logo.png"
              },
              "wirecard-paypal": {
                "name": "PayPal",
                "provider-name": "Wirecard"
              }
            }
          ]
        }
      }
    }
  ]
}
```

2.3.1.6.4 Voucher detail

2.3.1.6.4.1 Voucher detail request

|GET /api/rest/v1/vouchers/:voucher-id HTTP/1.1 Authorization: No Auth Accept: application/vnd.api+json

2.3.1.6.4.2 Voucher detail response

```
HTTP/1.1 200 OK Content-Type: application/vnd.api+json
```

```
{
  "data": {
    "id": "f634f09f-9a06-4297-a326-0d703938b702",
    "type": "voucher",
    "attributes": {
      "code": "LEBALLINNL10",
      "currency": "EUR",
      "ean-code": "8717472242221",
      "encryption-type": 0,
      "kind": 0,
      "name": "Lebara All-in NL 10 EUR",
      "provider-code": "LEBARA",
      "provider-name": "Lebara",
      "short-name": "All-in NL 10",
      "value": 10.0,
      "price-total": 11.99,
      "price-tax": 0.00,
      "price-net": 11.99
    }
  }
}
```



```
{ "fee": 1.99, "payment-methods": { "wirecard-creditcard": { "name": "Credit Card", "provider-name": "Wirecard", "image-url": "https://wirecard.com/logo.png" }, "wirecard-paypal": { "name": "PayPal", "provider-name": "Wirecard" } } } }
```

2.3.1.6.5 Voucher order

See [VoucherWebReserve] method in the [Mimas integration] documentation for the source of these fields.

2.3.1.6.5.1 Voucher order request

Variables	Description	Example
-----------	-------------	---------

```
POST /api/rest/v1/voucher-orders HTTP/1.1 Authorization: No Auth Accept: application/vnd.api+json
{ "data": { "id": "c91feaf3-5968-4b60-aa5b-62fe7fdd905c", "type": "voucher-order", "attributes": { "voucher-code": "VODADE15", "payment-method": "Wirecard VISA", "notification-type": "email", "notification-target": "me@my-email.com", "provider-text-url": "https://provider.texts", "order-success-redirect-url": "/success", "order-failed-redirect-url": "failed", "order-canceled-redirect-url": "/cancel" } } }
```

field name	type	constrains	description	example
id	UUID	globally unique	globally unique UUID	c91feaf3-5968-4b60-aa5b-62fe7fdd905c
type	string	n/a	type of request, must be "voucher-order", "voucher-order"	
voucher-code	string	n/a	code of the voucher gathered from voucher list	"VODADE15"
payment-method	string	n/a	on of the allowed methods for the voucher, denoted in voucher list response	"Wirecard VISA"
notification-type	string	currently only "email" is supported	type of the notification target	"email"
notification-target	string	n/a	target adress	"[me@my-email.com] (mailto:me@my-email.com)"
order-success-redirect-url	string	valid URL	Where the wirecard should redirect if payment was successfull	protect
order-failed-redirect-url	string	valid URL	Where the wirecard should redirect if payment fails	protect
order-canceled-redirect-url	string	valid URL	Where the wirecard should redirect if payment was canceled	protect

2.3.1.6.5.2 Voucher order response

```
HTTP/1.1 201 Created Content-Type: application/vnd.api+json
{ "data": { "id": "c91feaf3-5968-4b60-aa5b-62fe7fdd905c", "type": "voucher-order", "attributes": { "notification-status": "pending", "confirmation-status": "pending", "notification-type": "email", "notification-target": "me@my-email.com", "payment-provider": "wirecard", "payment-redirect-url": "https://wpp-test.wirecard.com/?wPaymentToken=y93bki675x2CdKP8-h0mLD2zDgf26ptjxSNRiKFiILM", "payment-session-id": "4b7c0aec-3db3-4cd2-9b22-4d41fb964fdc", "payment-status": "pending", "payment-method": "creditcard", "voucher-code": "LEBALLINNL10", "voucher-currency": "EUR", "voucher-value": 10.0 "voucher-status": "pending", "order-price-total": 11.99, "order-tax-total": 0.00, "order-fee-total": 0.99, "order-status": "pending", "serial-number": "1234", "confirmation-date": "0", "batch-number": "1234" } } }
```

2.3.1.6.6 Voucher order detail

2.3.1.6.6.1 Voucher order detail request

```
GET /api/rest/v1/voucher-orders/:order-id HTTP/1.1 Authorization: No Auth Accept: application/vnd.api+json
```

2.3.1.6.6.2 Voucher order detail response

```
HTTP/1.1 200 OK Content-Type: application/vnd.api+json
{ "data": { "id": "c91feaf3-5968-4b60-aa5b-62fe7fdd905c", "type": "voucher-order", "attributes": { "notification-status": "pending", "confirmation-status": "pending", "notification-type": "email", "notification-target": "me@my-email.com", "payment-provider": "wirecard", "payment-redirect-url": "https://wpp-test.wirecard.com/?wPaymentToken=y93bki675x2CdKP8-h0mLD2zDgf26ptjxSNRiKFiILM", "payment-session-id": "4b7c0aec-3db3-4cd2-9b22-4d41fb964fdc", "payment-status": "pending", "payment-method": "creditcard", "voucher-code": "LEBALLINNL10", "voucher-currency": "EUR", "voucher-value": 10.0 "voucher-
```



```
|status": "pending", "order-price-total": 11.99, "order-tax-total": 0.00, "order-fee-total": 1.99, "order-status": "pending", "serial-number":  
|1234", "confirmation-date": "1611313953175" } } }
```

2.3.1.6.7 Provider Text

See *[GetProvicerTexts]* method in the *[Mimas integration]* documentation for the source of these fields.

2.3.1.6.7.1 Provider Text request

Variables	Description	Example
GET /api/rest/v1/provider-texts/	HTTP/1.1 Authorization: No Auth Accept: application/vnd.api+json	
GET /api/rest/v1/provider-texts/:provider-id	HTTP/1.1 Authorization: No Auth Accept: application/vnd.api+json	
2.3.1.6.7.2 Provider Text response		
HTTP/1.1 201 Created Content-Type: application/vnd.api+json		
{ "data": [{ "id": "f74bb480-d6df-47ad-8a17-8d7b1b176661", "type": "voucher-text", "attributes": { "provider-code": "ABOUTYOU", "kind": "title", "title": "Produktname", "body": "About You-Geschenkkarte" } }, { "id": "a598bf3b-abe0-4fc4-80fa-135a84510c81", "type": "voucher-text", "attributes": { "provider-code": "ABOUTYOU", "kind": "subtitle", "title": "Slogan", "body": "Hol Dir per E-Mail eine About You-Geschenkkarte." } }] }		

2.3.1.6.8 Content

See *[Content Service]* for more information on the source of these fields.

2.3.1.6.8.1 Content request

Variables	Description	Example
GET /api/rest/v1/content/i18next.json	HTTP/1.1 Authorization: No Auth Accept: application/json	
2.3.1.6.8.2 Content response		
HTTP/1.1 200 OK Content-Type: application/json		
{ "en": { "world.hello": "Hello, World!", "example.text": "Lorem ipsum dolor sit amet...", "button.cancel": "Cancel", "radio.options": { "option-1": "Selection 1", "option-2": "Selection 2", } }, "de": { "world.hello": "Hallo, Welt!", "example.text": "Lorem ipsum dolor sit amet...", "button.cancel": "Abbrechen", "radio.options": { "option-1": "Auswahl 1", "option-2": "Auswahl 2", } } }		

2.3.1.6.9 Verification

See for more information on the source of these fields.

2.3.1.6.9.1 Verification request by phone number

```
|POST /api/rest/v1/auth/phone-number-verification HTTP/1.1 Authorization: No Auth Accept: application/vnd.api+json { "data": { "id":  
|"38f4dfef-9baa-4302-831f-e41df4ce4084", "type": "phone-number-verification", "attributes": { "phone-number": "+381691994655", "sms-  
|confirmation-code": "716569" } } }
```

2.3.1.6.9.2 Verification by phone number response

```
|HTTP/1.1 200 OK Content-Type: application/json  
|{ "data": { "type": "phone-number-verification", "attributes": { "phone-number": "+381691994655", "ok": false, "remaining-number-of-  
|attempts": 4, "remaining-expiration-time": 0 } } }
```

2.3.1.6.9.3 Verification request by sms

```
|POST /api/rest/v1/auth/sms-verification-code HTTP/1.1 Authorization: No Auth Accept: application/vnd.api+json { "data": { "id":  
|"48f4dfef-9baa-4302-831f-e41df4ce4084", "type": "sms-verification-code", "attributes": { "phone-number": "+381691994655" } } }
```

2.3.1.6.9.4 Verification by sms number response

```
|HTTP/1.1 200 OK Content-Type: application/vnd.api+json  
|{ "data": { "type": "sms-verification-code", "attributes": { "phone-number": "+381691994655", "ok": true, "remaining-number-of-attempts":  
|2, "remaining-delay-time": 20, "remaining-expiration-time": 1800 } } }
```

2.3.1.6.10 Cookies

2.3.1.6.10.1 Cookies request

```
|POST /api/rest/v1/cookies HTTP/1.1 Authorization: No Auth Accept: application/vnd.api+json { "data": [ { "type": "cookie", "id": "shopId",  
|"attributes": { "name": "shopId", "value": "1234" } }, { "type": "cookie", "id": "ns_dev_id", "attributes": { "name": "ns_dev_id", "value":  
|"device_id" } } ] }
```

2.3.1.6.10.2 Cookies response

```
|HTTP/1.1 200 OK
```

2.3.1.6.11 Documentation

Returns list of Json Schemas for request and response for requested rest endpoint. Use exact endpoint plus schema url parameter. For example, /api/rest/v1/vouchers?schema will return json schemas for /api/rest/v1/vouchers endpoint.

2.3.1.6.11.1 Documentation request

```
|GET /api/rest/v1/vouchers?schema HTTP/1.1 Authorization: No Auth Accept: application/vnd.api+json
```

2.3.1.6.11.2 Documentation response

Complete Response is omitted because of size , here is just a part :



HTTP/1.1 200 OK

```
{ "required": [ "createdDate", "notificationStatus", "notificationTarget", "notificationType", "orderFeeTotal", "orderPriceTotal", "orderStatus", "orderTaxTotal", "paymentMethod", "paymentProvider", "paymentStatus", "shortId", "voucherCode", "voucherCurrency", "voucherStatus", "voucherValue" ] }
```

2.3.1.6.12 *i18 internationalization*

Retrieves i18next json based on requested language

2.3.1.6.12.1 *i18 request*

GET api/rest/v1/content/i18next.json/de HTTP/1.1 Authorization: No Auth Accept: application/vnd.api+json

2.4 Markdown4

2.4.1 *From today's featured article*



Lionel Matthews (15 August 1912 -- 2 March 1944) was an Australian Army officer during World War II who was posthumously awarded the George Cross, the highest non-combat award for heroism for members of the Australian armed forces at the time. Matthews served in the 27th Brigade during the Malayan campaign, and at the surrender of Singapore in 1942 became a prisoner of war (POW). He was awarded the Military Cross for courage, energy and ability under fire during this fighting.

2.4.1.1 *Did you know ...*

that in 2017 you could finally have breakfast at Tiffany's (pictured)?

that the British mycologist Denis Garrett, "one of the last 'string and sealing wax' scientists", once bought plastic lavatory cisterns for his laboratory to use in experiments?

that sand in the stomach of the ocean surgeon helps to grind up its food?

2.4.1.1.1 *In the news*

1. More than 300 girls are kidnapped from a secondary school by armed bandits in Zamfara, Nigeria.
2. In tennis, Naomi Osaka wins the women's singles and Novak Djokovic wins the men's singles at the Australian Open (both winners pictured).

2.4.1.1.1.1 *On this day*

2.4.1.1.1.1.1 *March 2*

1444 -- *The League of Lezhë, an alliance of regional chieftains, was established in Venetian Albania with Skanderbeg as its commander.*

1865 -- *New Zealand Wars: Carl Sylvius Völkner (pictured), a Protestant missionary, was killed by Hauhau militants in #p#tiki for working as an agent for George Grey, Governor-General of New Zealand.*


1937 -- *The Steel Workers Organizing Committee, precursor to the United Steel Workers of America, had a major success when it signed a collective-bargaining agreement with U.S. Steel.*

1962 -- *Led by General Ne Win, the Burmese military seized power in a coup d'état.*

aaaaaaaaaaaaaaaaaaaa



2.4.1.1.1.1.1.1 Today's featured picture

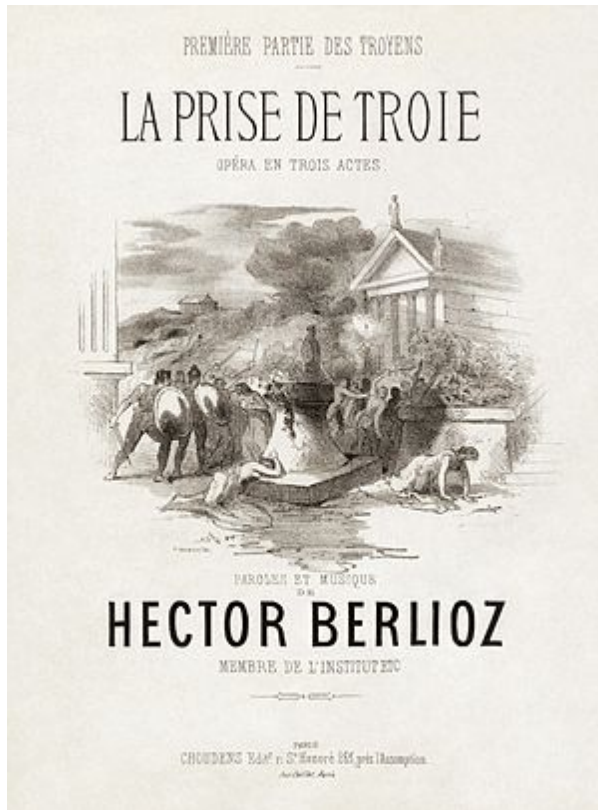

2.4.2 Armed conflicts and attacks

Zamfara kidnapping

1. All 279 abducted schoolgirls from a boarding school in Zamfara State, Nigeria, are released by their armed kidnappers. (Reuters)

2.4.2.1 Health and environment

[COVID-19 pandemic](#)

1. [COVID-19 pandemic in Asia](#)

[COVID-19 pandemic in Indonesia](#)

- # [Indonesia](#) reports their first two cases of [Lineage B.1.1.7](#) variant first detected in the United Kingdom. (Liputan6.com)

[COVID-19 pandemic in Iraq](#)

- # Iraq receives 50,000 doses of Sinopharm vaccines as the country officially begins its vaccination campaign. (Asharq Al-Awsat)

COVID-19 pandemic in Mongolia

- # Mongolia surpasses 3,000 cases of COVID-19. (Montsame)

COVID-19 pandemic in the Philippines

- # The Philippines reports their first six cases of 501.V2 variant first detected in South Africa. (GMA News)

2.5 Markdown5

2.5.1 ##### 19

2.5.1.1

2.5.1.1.1

####

#####

#####

[#####](#)

23. ##### 2020

11 081 000



####	#####	#####
<u>#####</u>	23. ##### 2020	6 630 000
E###	23. ##### 2020	1 007 700
####	24. ##### 2020	490 900
#####	24. ##### 2020	5 590 200
#####	24. ##### 2020	497 600
<u>#####</u>	24. ##### 2020	4 135 900

#####

#####

#####

2.5.1.1.1 #####

#####

2.5.1.2 Here are some test codes

```
public class Test { /** * This method returns status of checkbox (is checkbox checked). Method finds element by checkbox text
and gets class of that element, after that * it checks if class contains 'checkbox-checked', if class contains that text then checkbox is
selected and true value is return * if checkbox doesn't contain that text then false is returned * * @param checkboxText - text of
checkbox of witch you want to get status (e.g. "Read Only") * @return - method is returning boolean value. If checkbox class contains
"checkbox-checked" then true is returned in other case * false is returned */ private boolean getCheckboxCheckedStatusByName(String
checkboxText) { boolean isChecked = false; waitForDisplayedElement(ue("getCheckboxStatusByText", checkboxText)); String checked
= getDisplayedElement(ue("getCheckboxStatusByText", checkboxText)).getAttribute("class"); if (checked.contains("checkbox-checked"))
{ isChecked = true; } return isChecked; } }
<div class="plainlinks" style="background-color: #FBEAEA; border-radius:5px; margin-top:10px; position:relative; border:
1px solid #aaa; font-family: 'Helvetica', 'Arial', sans-serif; line-height: 18px; box-shadow: 0 1px 1px rgba( 0,
0, 0, 0.15 ); overflow:hidden;"> <div style="display:block; top:4px; width:100%; text-align:center;"> <div
style="color:#000085; font-size:25px; line-height:25px"> <div style="padding-left:50px;"></div> </div> <div style="padding-
top:2px; color:#444; font-size:1.15em; line-height:1.5;"> <div style="padding-left:8px; padding-right:8px;">#####
# <b><a href="/wiki/%D0%92%D0%B8%D0%BA%D0%B8%D0%BF%D0%B5%D0%B4%D0%B8%D1%98%D0%B0:%D0%9A
%D0%B0%D0%BC%D0%BF%D0%B0%D1%9A%D0%B0_
%D1%83%D1%80%D0%B5%D1%92%D0%B8%D0%B2%D0%B0%D1%9A%D0%B0_
%D1%80%D0%B5%D1%84%D0%B5%D1%80%D0%B5%D0%BD%D1%86%D0%B8_1Lib1Ref_2021" title="#####.#####
##### 1Lib1Ref 2021">##### „1lib1ref“</a></b> ## 15. ##### ## 5. #####. </div> </
div> </div> </div>
```

2.5.2 Here is some youtube video

2.6 h1 Heading 8-)

2.6.1 h2 Heading

2.6.1.1 h3 Heading

2.6.1.1.1 h4 Heading

2.6.1.1.1.1 h5 Heading

2.6.1.1.1.1.1 h6 Heading

2.6.2 Horizontal Rules

2.6.3 Typographic replacements



Enable typographer option to see result.

(c) (C) (r) (R) (tm) (TM) (p) (P) +-

test.. test... test..... test?..... test!....

!!!!!! ???? ,. -- ---

"Smarty pants, double quotes" and 'single quotes'

2.6.4 *Emphasis*

This is bold text

This is bold text

This is italic text

This is italic text

~~Strikethrough~~

2.6.5 *Blockquotes*

Blockquotes can also be nested...

...by using additional greater-than signs right next to each other...

...or with spaces between arrows.

2.6.6 *Lists*

Unordered

Create a list by starting a line with +, -, or *

Sub-lists are made by indenting 2 spaces:

1. Marker character change forces new list start:

Ac tristique libero volutpat at

Facilisis in pretium nisl aliquet

Nulla volutpat aliquam velit

Very easy!

Ordered

3. Lorem ipsum dolor sit amet

4. Consectetur adipiscing elit

5. Integer molestie lorem at massa

6. You can use sequential numbers...

7. ...or keep all the numbers as 1.

Start numbering with offset:

8. foo

9. bar

2.6.7 *Code*

Inline code

Indented code

// Some comments line 1 of code line 2 of code line 3 of code

Block code "fences"

| Sample text here... |

Syntax highlighting

| var foo = function (bar) { return bar++; }; console.log(foo(5)); |

2.6.8 *Tables*

Option	Description
data	path to data files to supply the data that will be passed into templates.



Option	Description
engine	engine to be used for processing templates. Handlebars is the default.
ext	extension to be used for dest files.

Right aligned columns

Option	Description
data	path to data files to supply the data that will be passed into templates.
engine	engine to be used for processing templates. Handlebars is the default.
ext	extension to be used for dest files.

2.6.9 Links

[link text](#)

[link with title](#)

Autoconverted link <https://github.com/nodeca/pica> (enable linkify to see)

2.6.10 Images



Like links, Images also have a footnote style syntax



With a reference later in the document defining the URL location:

2.6.11 Plugins

The killer feature of `markdown-it` is very effective support of [syntax plugins](#).

2.6.11.1 [Emojies](#)

Classic markup: `:wink:` `:crush:` `:cry:` `:tear:` `:laughing:` `:yum:`

Shortcuts (emoticons): `:-)` `:-(8-)` `;`

see [how to change output](#) with `twemoji`.

2.6.11.2 [Subscript](#) / [Superscript](#)

19th

H₂O

2.6.11.3 [<ins>](#)


Inserted text




2.6.11.4 [*<mark>*](#)


==Marked text==

2.6.11.5 [*Footnotes*](#)

Footnote 1 link .

Footnote 2 link .

Inline footnote[^][Text of inline footnote] definition.

Duplicated footnote reference .

2.6.11.6 [*Definition lists*](#)

Term 1

Definition 1 with lazy continuation.

Term 2 with *inline markup*

Definition 2

|{ some code, part of Definition 2 }

Third paragraph of definition 2.

Compact style:

Term 1 ~ Definition 1

Term 2 ~ Definition 2a ~ Definition 2b

2.6.11.7 [*Abbreviations*](#)

This is HTML abbreviation example.


It converts "HTML", but keep intact partial entries like "xxxHTMLyyy" and so on.

*[HTML]: Hyper Text Markup Language

2.6.11.8 [*Custom containers*](#)

::: warning *here be dragons* :::

10. Footnote **can have markup**

and multiple paragraphs. .

11. Footnote text.



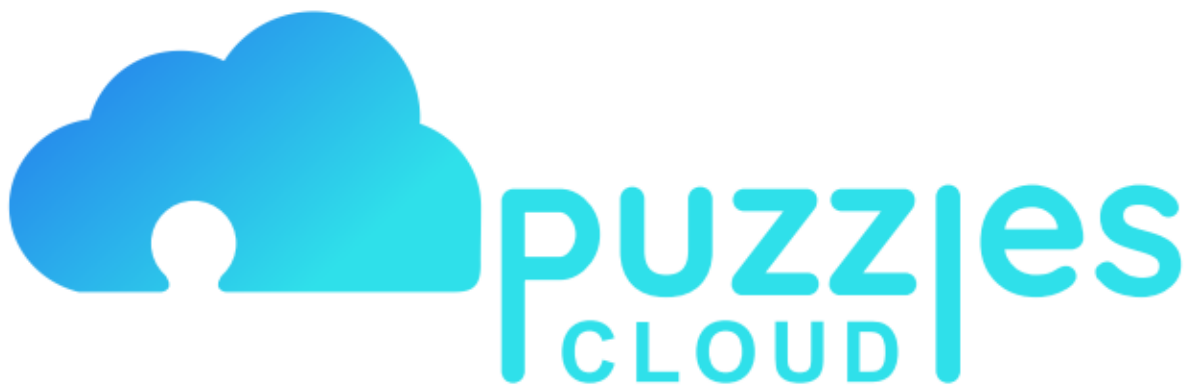


Figure 1: Last Page