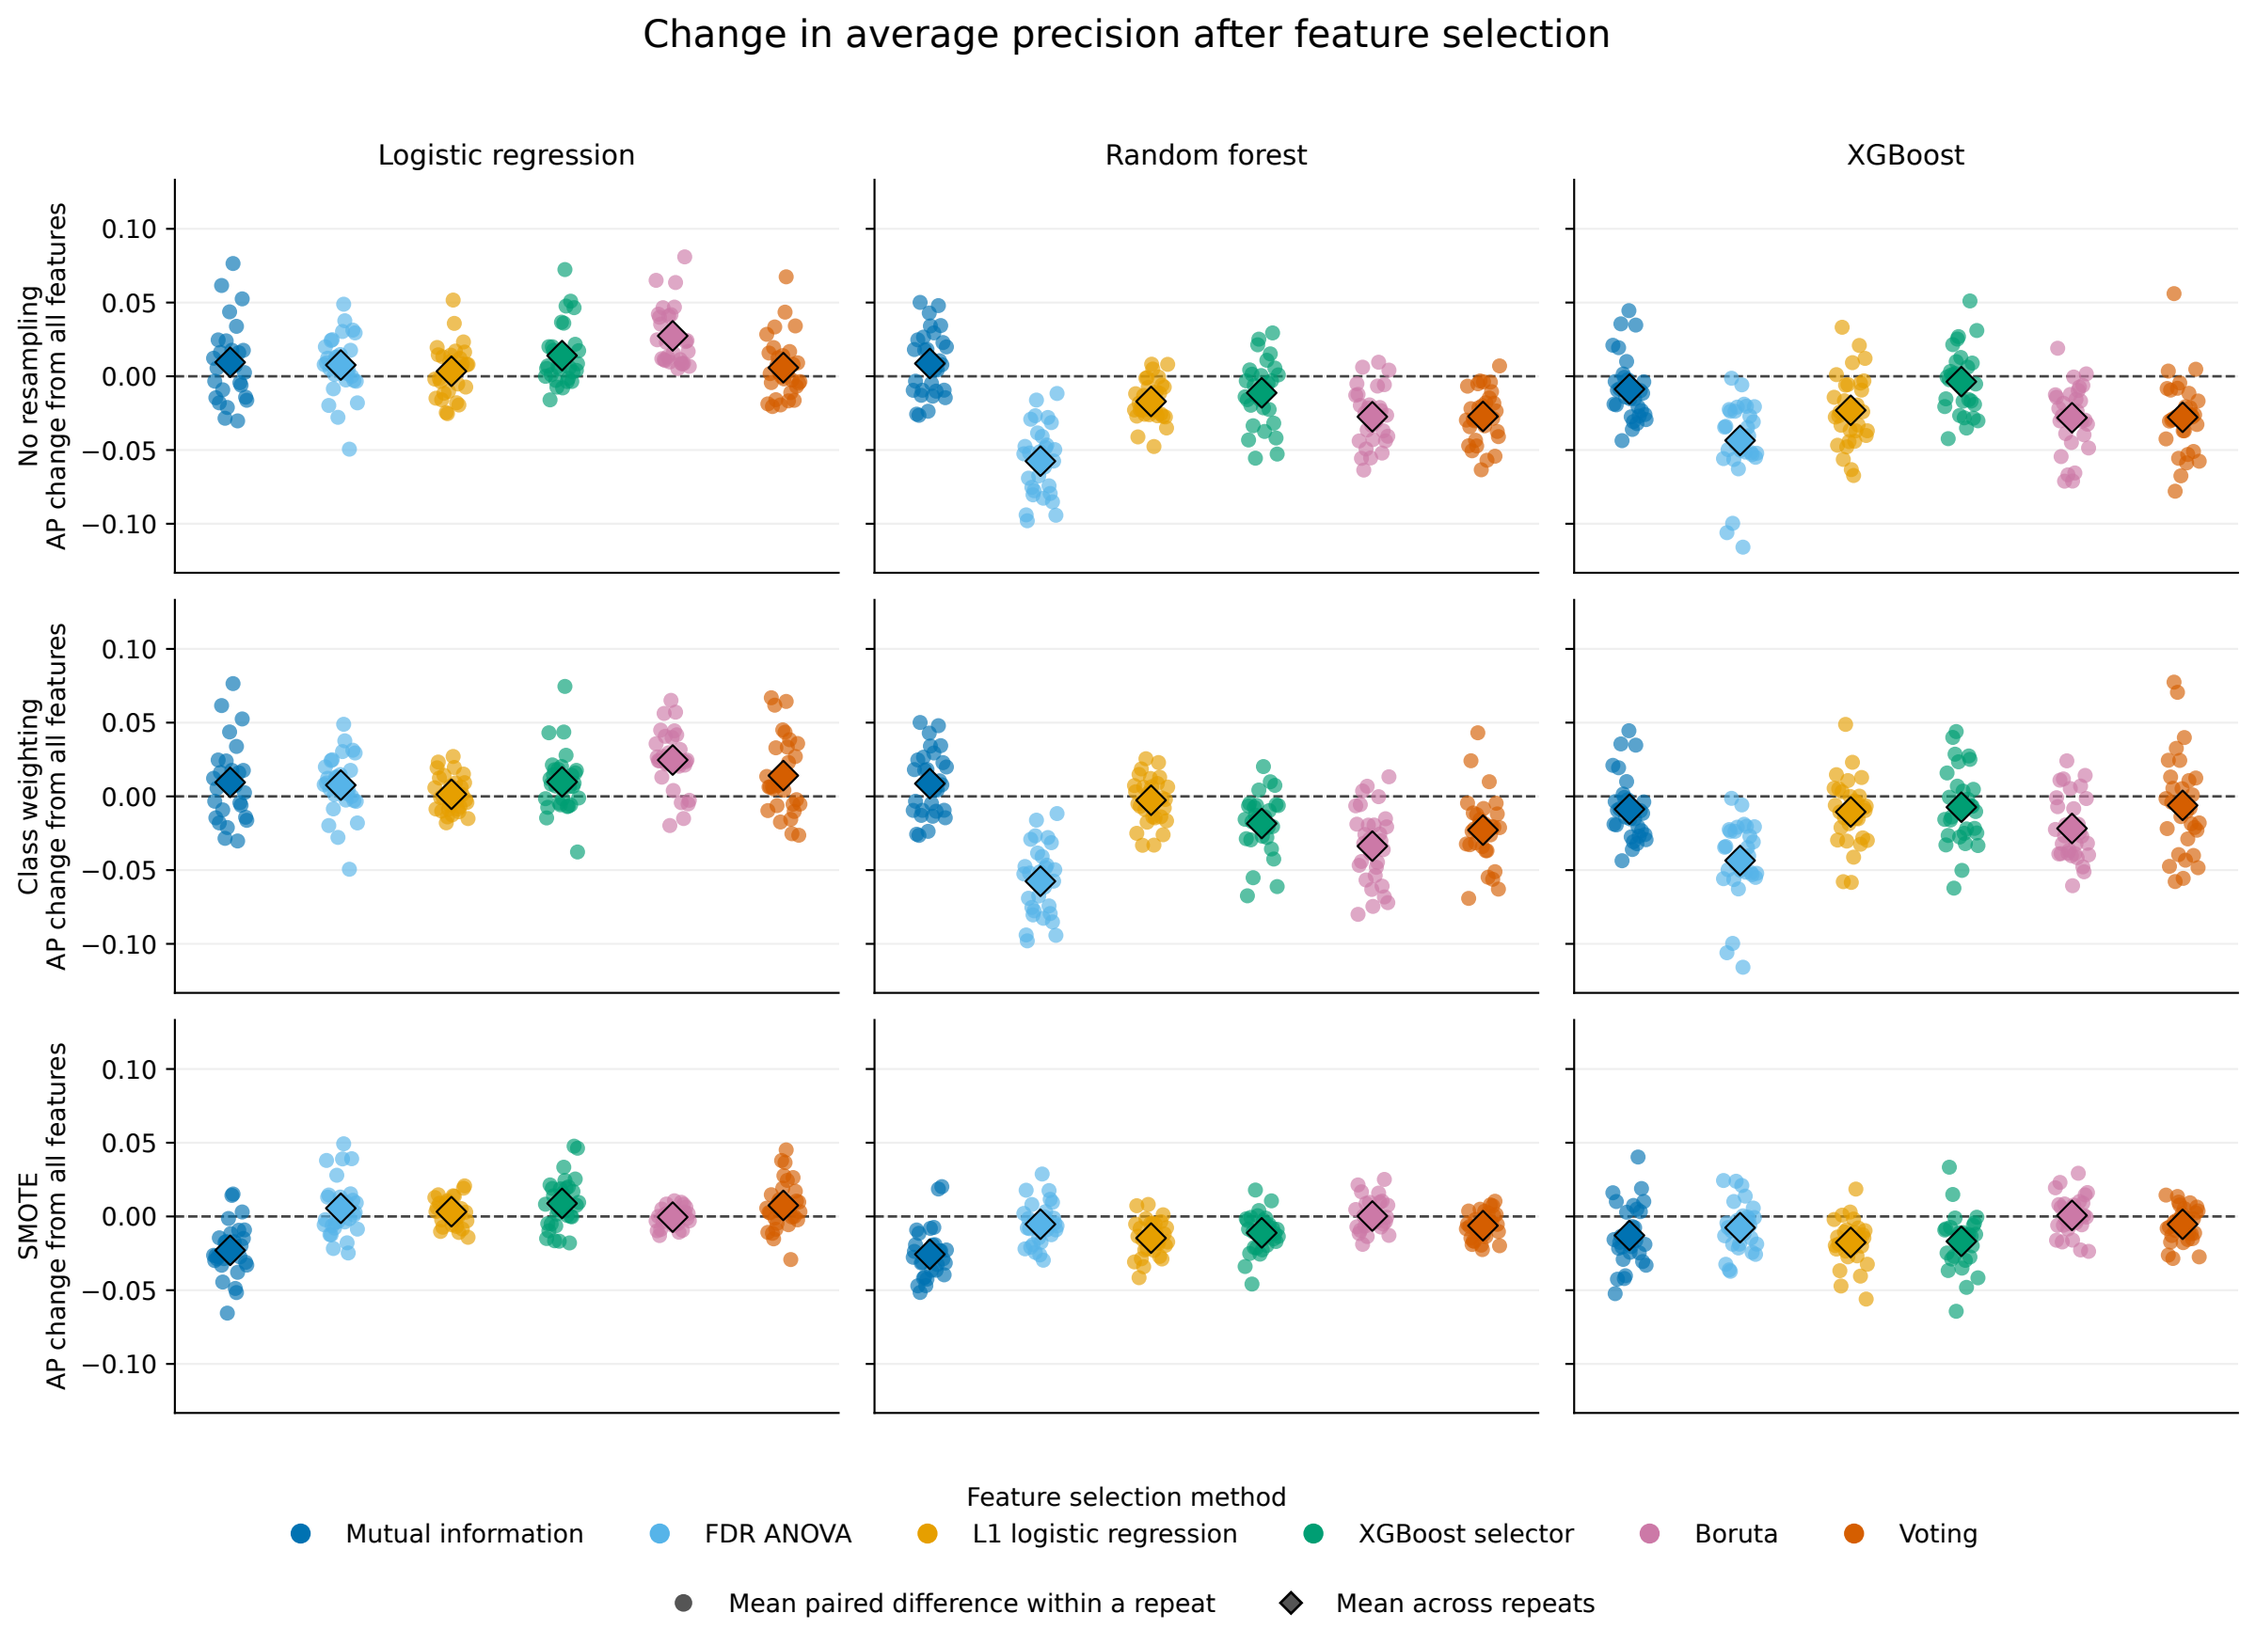
Change in average precision after feature selection
Logistic regression
Random forest
XGBoost
No resampling
Class weighting
SMOTE
AP change from all features
0.10
0.05
0.00
−0.05
−0.10
Feature selection method
Mutual information
FDR ANOVA
L1 logistic regression
XGBoost selector
Boruta
Voting
Mean paired difference within a repeat
Mean across repeats