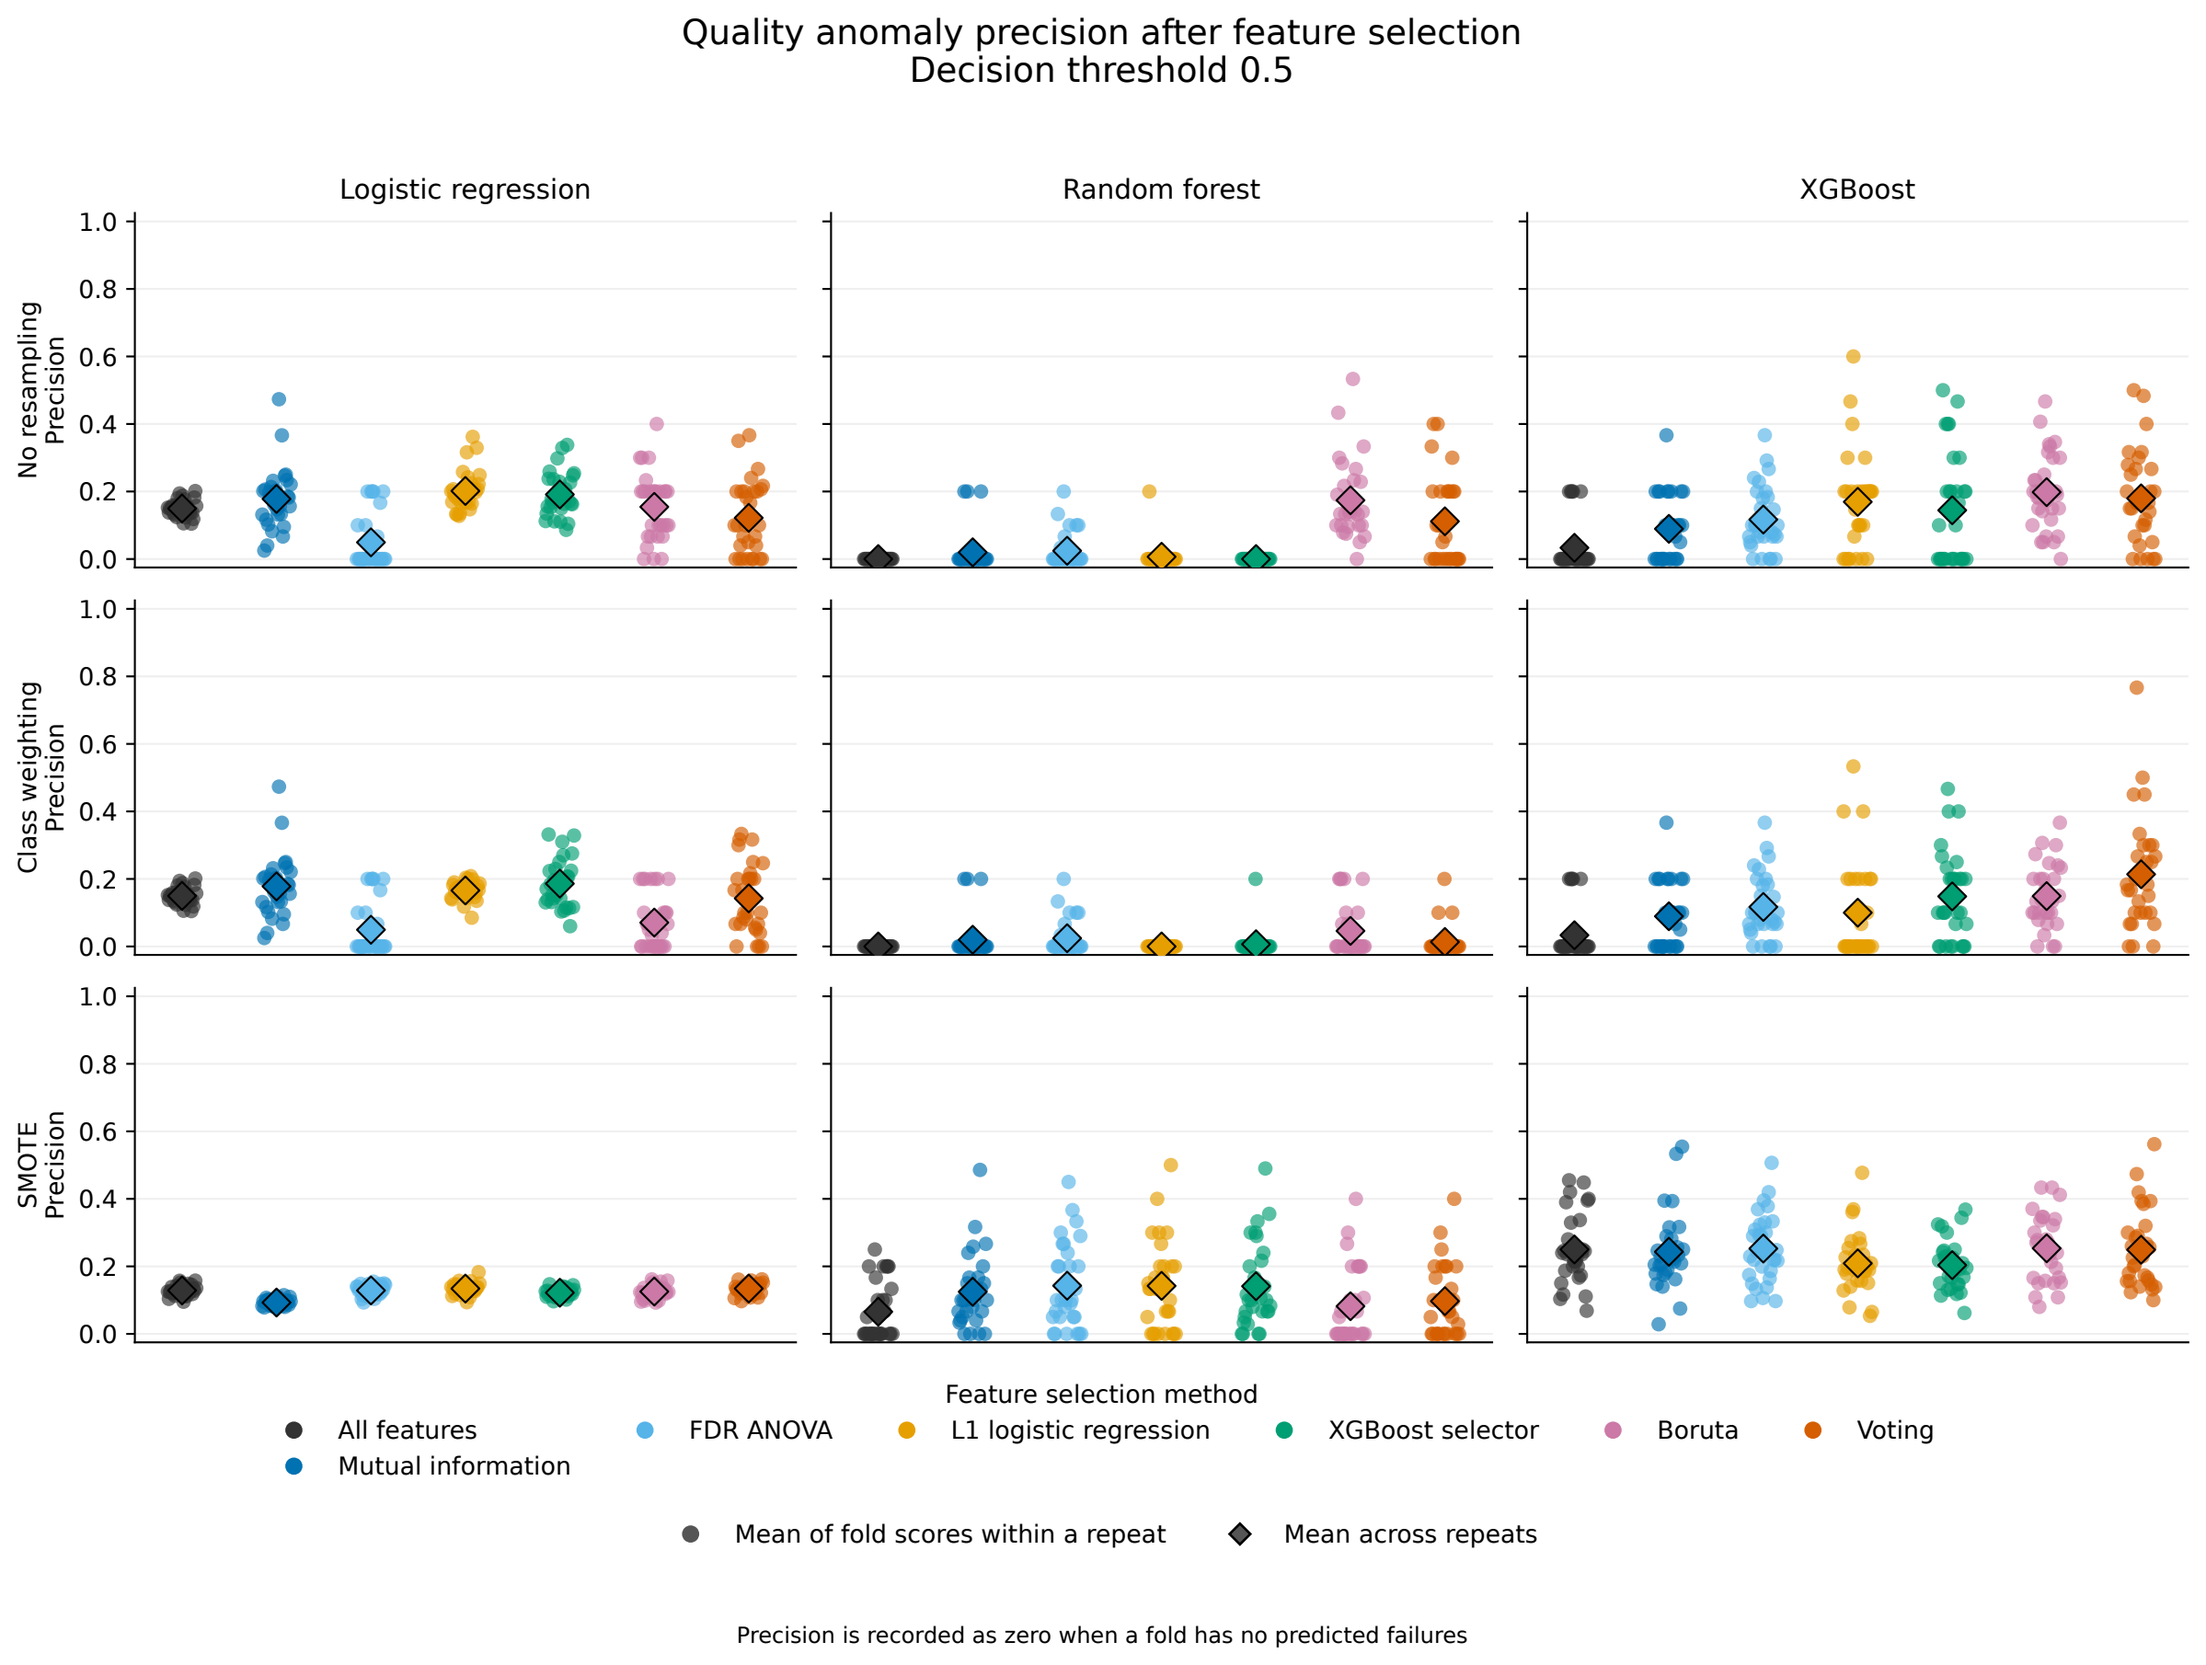
Quality anomaly precision after feature selection
Decision threshold 0.5
Logistic regression
Random forest
XGBoost
No resampling
Class weighting
SMOTE
Precision
1.0
0.8
0.6
0.4
0.2
0.0
Feature selection method
All features
Mutual information
FDR ANOVA
L1 logistic regression
XGBoost selector
Boruta
Voting
Mean of fold scores within a repeat
Mean across repeats
Precision is recorded as zero when a fold has no predicted failures