

# Final Report

Mikael J. Gonsalves

## Problem, research questions and exploratory analysis

Create a vector of five numbers of your choice between 0 and 10, save that vector to an object and use the `sum()` function to calculate the sum of the numbers.

```
vec <- c(2,5,7,8,9)
sum(vec)
```

```
## [1] 31
```

## Problem 2

Create a data frame that includes two columns. One column must have the numbers 1 through 5, and the other column must have the numbers 6 through 10. The first column must be named “alpha” and the second column must be named “beta”. Name the object “my\_dat”. Display the data.

```
alpha <- (1:5)
beta <- (6:10)
my_dat <- data.frame(alpha,beta)
my_dat
```

```
##   alpha beta
## 1     1    6
## 2     2    7
## 3     3    8
## 4     4    9
## 5     5   10
```

## Problem 3

Using the data frame created in Problem 2, use the `summary()` command to create a five-number summary for the column named “beta”.


```
summary(my_dat$beta)
```

```
##      Min. 1st Qu.  Median    Mean 3rd Qu.    Max.
##         6         7         8         8         9        10
```

## Problem 4

There is code for importing the example survey data that will run automatically in the setup chunk for this report (Line 13). Using that data, make a boxplot of the Family Income column using the Base R function (not a figure drawn using qplot). Include your name in the title for the plot. Your name should be in the title. Relabel that x-axis as “Family Income”.

```
dat <- drop_na(read.csv(url("https://www.dropbox.com/s/uhfstf6g36ghxwp/cces_sample_coursera.csv?raw=1")))
boxplot(dat$faminc_new, main="Mikael's Boxplot of Family Income", xlab="Family Income")
```

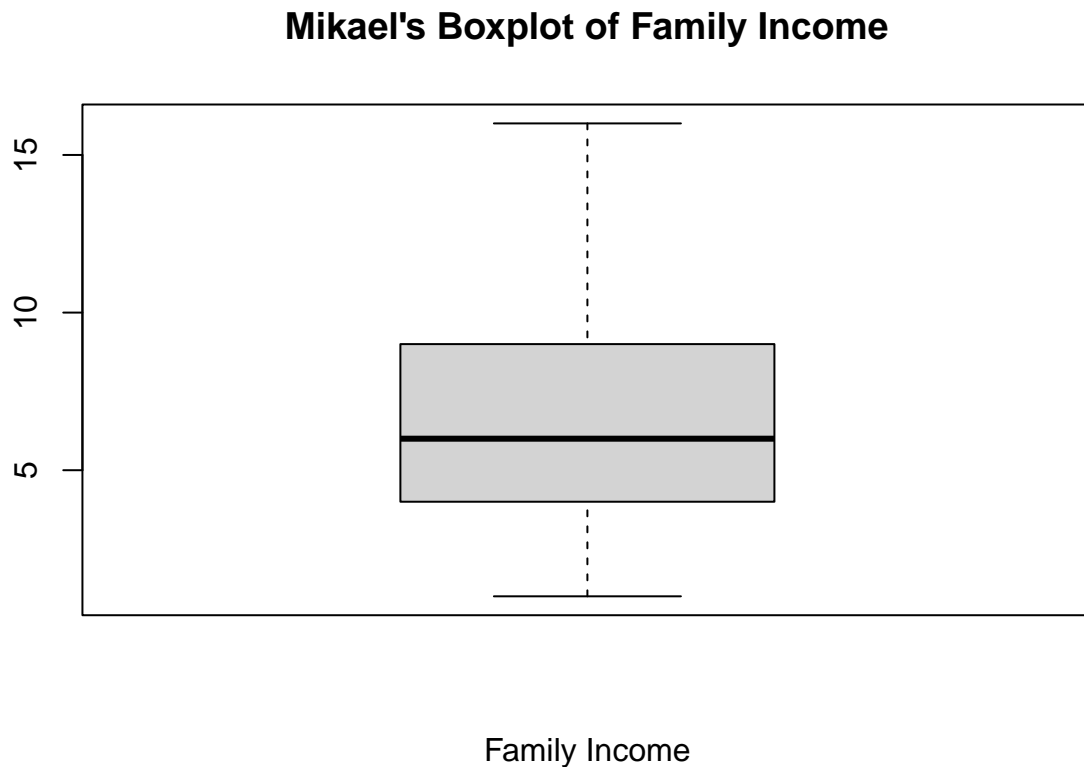

## Problem 5

Using the survey data, filter to subset the survey data so you only have male survey respondents who live in the northwest or midwest of the United States, are married, and identify as being interested in the news most of the time.

Use the `str()` function to provide information about the resulting dataset.

```
filt_dat <- filter(dat, region <= 2 & gender == 1 & marstat == 1 & newsint == 1)
str(filt_dat)
```

```
## 'data.frame': 75 obs. of 25 variables:
## $ caseid : int 420208067 412948037 411855595 414480371 416806180 414729651 412021973 41234883
## $ region : int 2 1 1 1 2 2 1 2 1 2 ...
```

```
## $ gender      : int  1 1 1 1 1 1 1 1 1 1 ...
## $ educ        : int  3 5 6 5 3 2 6 5 5 5 ...
## $ edloan      : int  2 1 2 1 1 2 2 2 2 2 ...
## $ race        : int  1 1 1 1 1 1 1 1 1 1 ...
## $ hispanic    : int  2 2 2 2 2 2 2 2 2 2 ...
## $ employ      : int  1 1 1 1 1 5 5 1 1 1 ...
## $ marstat     : int  1 1 1 1 1 1 1 1 1 1 ...
## $ pid7        : int  4 1 4 4 6 2 1 1 1 7 ...
## $ ideo5       : int  5 1 3 3 3 1 2 3 1 5 ...
## $ pew_religimp: int  4 4 4 1 2 4 4 2 4 1 ...
## $ newsint     : int  1 1 1 1 1 1 1 1 1 1 ...
## $ faminc_new  : int 10 11 10 9 10 2 13 8 7 11 ...
## $ union       : int  1 2 3 3 1 3 2 2 2 3 ...
## $ investor    : int  2 1 1 1 1 2 1 2 1 2 ...
## $ CC18_308a   : int  4 4 4 1 2 3 4 4 4 1 ...
## $ CC18_310a   : int  2 3 3 3 2 2 3 2 3 2 ...
## $ CC18_310b   : int  2 3 3 3 2 3 3 5 3 3 ...
## $ CC18_310c   : int  3 3 3 3 3 3 2 5 3 3 ...
## $ CC18_310d   : int  2 5 3 3 3 2 2 2 3 3 ...
## $ CC18_325a   : int  1 2 1 1 1 2 2 2 2 1 ...
## $ CC18_325b   : int  2 2 1 1 1 1 2 1 2 2 ...
## $ CC18_325c   : int  1 2 2 1 1 2 2 1 2 2 ...
## $ CC18_325d   : int  1 1 1 1 1 1 1 1 2 1 ...
```

## Problem 6

Filter the data the same as in Problem 5. Use a R function to create a frequency table for the responses for the question asking whether these survey respondents are invested in the stock market.

```
table(filt_dat$investor)
```

```
##
##  1  2
## 57 18
```

## Problem 7

Going back to using all rows in the dataset, create a new column in the data using mutate that is equal to either 0, 1, or 2, to reflect whether the respondent supports increasing the standard deduction from 12,000 to 25,000 [CC18\_325d], supports cutting the corporate income tax rate from 39 to 21 percent [CC18\_325a], or both support neither = 0, support one = 1 support both = 2). Name the column “tax\_scale”. Hint: you’ll need to use recode() as well.

Display the first twenty elements of the new column you create.

Put your code and solution here:

```
approv_325d <- recode(dat$CC18_325d, '1'=1, '2'=0)
approv_325a <- recode(dat$CC18_325a, '1'=1, '2'=0)

dat$approv_325d <- approv_325d
```

```
dat$approv_325a <- approv_325a

dat <- mutate(dat, tax_scale=approv_325d+approv_325a)

head(dat$tax_scale,20)
```

```
## [1] 2 1 1 1 2 2 2 1 0 1 0 2 0 1 0 1 1 1 2 1
```

## Problem 8

Use a frequency table command to show how many 0s, 1s, and 2s are in the column you created in Problem 7.

```
table(dat$tax_scale)
```

```
##
##  0  1  2
## 130 408 331
```

## Problem 9

Again using all rows in the original dataset, use summarise and group\_by to calculate the average (mean) job of approval for President Trump in each of the four regions listed in the “region” column.

Put your code and solution here:

```
grouped_reg <- dat %>% group_by(region)
summarise(grouped_reg, 'Approve_Mean' = mean(CC18_308a))
```

```
## # A tibble: 4 x 2
##   region Approve_Mean
##   <int>      <dbl>
## 1     1          2.77
## 2     2          2.76
## 3     3          2.71
## 4     4          3.03
```

```
filt_dat <- filter(dat, investor==2 & faminc_new>=5 & faminc_new<=10)
summarise(filt_dat, 'Mean Religion Imp.' = mean(pew_religimp), 'Median Religion Imp.' = median(pew_reli
```

```
##   Mean Religion Imp. Median Religion Imp. Standard Dev. Religion Imp.
## 1          2.325893              2          1.188906
```

## Problem 11

Use kable() and the summarise() function to create a table with one row and three columns that provides the mean, median, and standard deviation for the column named faminc\_new in the survey data.

```
sum_faminc_new <- summarise(dat, 'Mean' = mean(faminc_new), 'Median' = median(faminc_new), 'Std. Dev.' =
kable(sum_faminc_new)
```

Mean	Median	Std. Dev.
6.581128	6	3.247035

## Problem 12

With the survey data, use `qplot()` to make a histogram of the column named `pid7`. Change the x-axis label to “Seven Point Party ID” and the y-axis label to “Count”.

```
qplot(x=pid7, data=dat, geom="histogram",ylab="Count",xlab="Seven-Point Party ID")
```

