

**Duration : 3.890 s** Start: Jan 11, 6:17:04.714 PM End: Jan 11, 6:17:08.604 PM Scenarios **Features** Steps PASSED - 0 PASSED - 0 PASSED - 0 SKIPPED - 0 SKIPPED - 0 SKIPPED - 4 40 50 60 40 50 60 40 50 60 Pass % 70 30 Pass % 70 30 Pass % 70 20 20 20 80 80 80 90 90 100

FEATURES SUMMARY -- 2 --

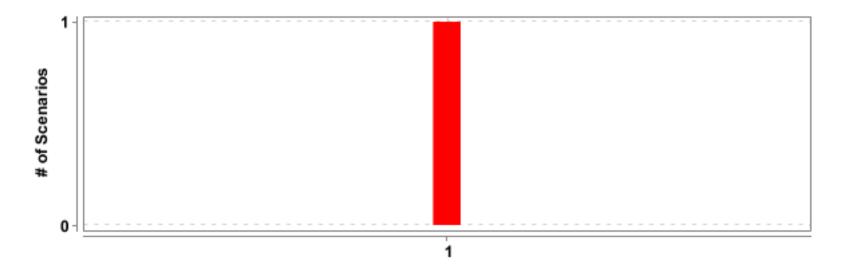

#	Feature Name	T	P	F	S	Duration
1	Login Page	1	0	1	0	3.890 s

SCENARIOS SUMMARY -- 3 --

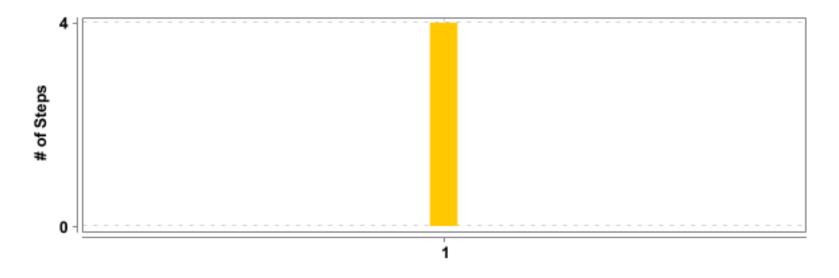


#	Feature Name	Scenario Name	T	P	F	S	Duration
1	Login Page	Empty Mail	4	0	0	4	3.879 s

DETAILED SECTION -- 4 --

## (F)- Login Page

FAILED	DURATION - 3.890 s	Scenarios		Steps	
		Total - 1		Total - 4	
/ 6:17:04.714 PI	M // 6:17:08.604 PM /	Pass - 0	1	Pass - 0	4
		Fail - 1		Fail - 0	
		Skip - 0		Skip - 4	

## (S)- Empty Mail

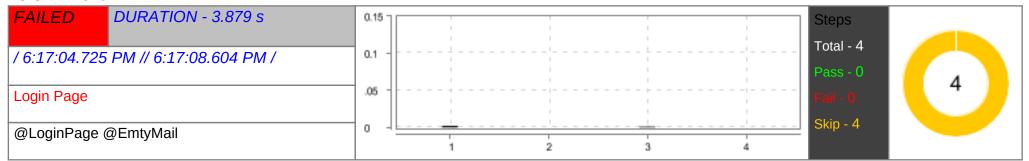

#	Step / Hook Details	Status	Duration
	BEFORE - util.ApplicationHooks.before()	FAILED	3.842 s
	org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Response code 500. Message: An unknown server-side error occurred while processing the command. Original error: 'app' option is required for reinstall Host info: host: 'DESKTOP-6A5MND1', ip: '192.168.1.104' Build info: version: '4.7.2', revision: '4d4020c3b7' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java. version: '18.0_352' Driver info: org.openqa.selenium.remote.RemoteWebDriver Command: [null, newSession {capabilities=[Capabilities {appActivity: com.modanisa.activity.Splas, appPackage: com.modanisa.debug, deviceName: emulator-5554, platformName: ANDROID, platformVersion: 9}}, desiredCapabilities=Capabilities {appActivity: com.modanisa.activity.Splas, appPackage: com.modanisa.debug, deviceName: emulator-5554, platformName: ANDROID, platformVersion: 9}}] Capabilities {} at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:148) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:106) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:156) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:51) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:28) at org.openqa.selenium.remote.RemoteWebDriver. <li>at org.openqa.selenium.remote.RemoteWebDriver.sersion(RemoteWebDriver.java:136) at org.openqa.selenium.remote.RemoteWebDriver.siont&gt;(RemoteWebDriver.java:136) at org.openqa.selenium.remote.RemoteWebDriver.siont&gt;(RemoteWebDriver.java:138) at util.DriverFactory.initDriver(DriverFactory.java:55)</li> <li>at util.ApplicationHooks.before(ApplicationHooks.java:44)</li>		

DETAILED SECTION -- 5 --

#	Step / Hook Details	Status	Duration
1	Given user is on login page	SKIPPED	0.002 s
2	When user enters password "password"	SKIPPED	0.000 s
3	When user clicks on Login button	SKIPPED	0.001 s
4	Then user should see empty mail message "alo"	SKIPPED	0.000 s
	AFTER - util.ApplicationHooks.after(io.cucumber.java.Scenario)	FAILED	0.004 s
	java.lang.NullPointerException at util.ApplicationHooks.after(ApplicationHooks.java:127)		