

R-ALAB 308A.4.1:

Working with External Data

Version 1.0, 10/18/23
[Click here to open in a separate window.](#)

Introduction

This **graded** assignment challenges you to create an interactive application using data from an external Application Programming Interface (API). In order to accomplish this task, you will employ the tools and techniques you have learned thus far, including `fetch`, `Axios`, and `async/await` syntax.

Objectives

- Request data from an external API using `fetch` and `Axios`.
- Create an interactive, dynamic webpage that serves content from an external API.
- Use `async/await` and Promises to create synchronous logic in asynchronous actions.
- Using `fetch` or `Axios`, `POST` data to and `DELETE` data from an external API.

Submission


Submit your completed lab using the **Start Assignment** button on the assignment page in Canvas.

Your submission should include:

- A GitHub link to your completed project repository.

Instructions

The CodeSandbox below contains pre-configured contents, including an HTML layout, CSS styling, and instructions embedded in the form of comments. Take a few minutes to familiarize yourself with the contents of the sandbox.

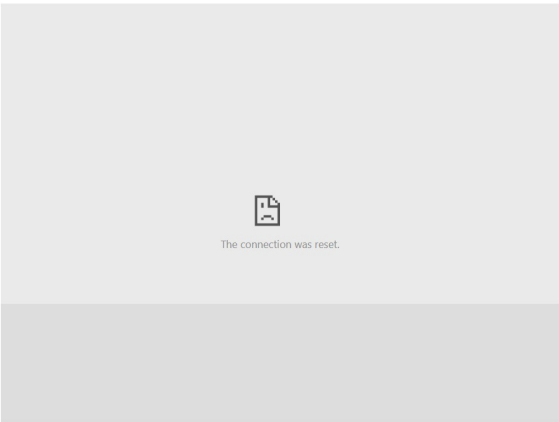

Download the sandbox and initialize a local git repository. Link this repository to GitHub, and use your local development environment to complete the tasks that follow.


You will be primarily working within the `index.js` file.

Commit frequently! Every time something works, you should commit it. Remember, you can always go back to a previous commit if something breaks.

Part 1: The API

For the purposes of this assignment, you will be working with [The Cat API](#), which is a free public API.

Navigate to the API's website using the link above, and then create an account as follows:

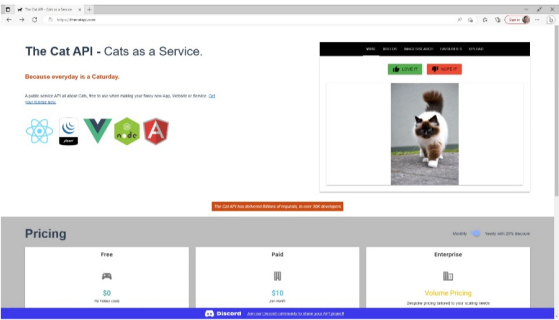

The first step toward working with any API is exploring its documentation. Every API you work with will be different, so never make any assumptions about how an API works.

Once you have familiarized yourself with the fundamentals of the API, continue to the tasks below.

Part 2: Tasks

Now that you know what you are working with, implement the following. These steps are best accomplished in order, but feel free to approach the problem differently if you see a creative and efficient solution:

1. Create an `async` function `"initialLoad"` that does the following:
 - Retrieve a list of breeds from the cat API using `fetch()`.
 - Create new `<options>` for each of these breeds, and append them to `breedSelect`.
 - Each option should have a `value` attribute equal to the `id` of the breed.
 - Each option should display text equal to the `name` of the breed.
 - This function should execute immediately.
2. Create an event handler for `breedSelect` that does the following:
 - Retrieve information on the selected breed from the cat API using `fetch()`.
 - Make sure your request is receiving multiple array items!
 - Check the API documentation if you are only getting a single object.
 - For each object in the response array, create a new element for the carousel.

The first step toward working with any API is exploring its documentation. Every API you work with will be different, so never make any assumptions about how an API works.

Once you have familiarized yourself with the fundamentals of the API, continue to the tasks below.

Part 2: Tasks

Now that you know what you are working with, implement the following. These steps are best accomplished in order, but feel free to approach the problem differently if you see a creative and efficient solution:

1. Create an `async` function `"initialLoad"` that does the following:
 - Retrieve a list of breeds from the cat API using `fetch()`.
 - Create new `<options>` for each of these breeds, and append them to `breedSelect`.
 - Each option should have a `value` attribute equal to the `id` of the breed.
 - Each option should display text equal to the `name` of the breed.
 - This function should execute immediately.
2. Create an event handler for `breedSelect` that does the following:
 - Retrieve information on the selected breed from the cat API using `fetch()`.
 - Make sure your request is receiving multiple array items!
 - Check the API documentation if you are only getting a single object.
 - For each object in the response array, create a new element for the carousel.

The first step toward working with any API is exploring its documentation. Every API you work with will be different, so never make any assumptions about how an API works.

Once you have familiarized yourself with the fundamentals of the API, continue to the tasks below.

Part 2: Tasks

Now that you know what you are working with, implement the following. These steps are best accomplished in order, but feel free to approach the problem differently if you see a creative and efficient solution:

1. Create an `async` function `"initialLoad"` that does the following:
 - Retrieve a list of breeds from the cat API using `fetch()`.
 - Create new `<options>` for each of these breeds, and append them to `breedSelect`.
 - Each option should have a `value` attribute equal to the `id` of the breed.
 - Each option should display text equal to the `name` of the breed.
 - This function should execute immediately.
2. Create an event handler for `breedSelect` that does the following:
 - Retrieve information on the selected breed from the cat API using `fetch()`.

The first step toward working with any API is exploring its documentation. Every API you work with will be different, so never make any assumptions about how an API works.

Once you have familiarized yourself with the fundamentals of the API, continue to the tasks below.

Part 2: Tasks

Now that you know what you are working with, implement the following. These steps are best accomplished in order, but feel free to approach the problem differently if you see a creative and efficient solution:

1. Create an `async` function `"initialLoad"` that does the following:
 - Retrieve a list of breeds from the cat API using `fetch()`.
 - Create new `<options>` for each of these breeds, and append them to `breedSelect`.
 - Each option should have a `value` attribute equal to the `id` of the breed.
 - Each option should display text equal to the `name` of the breed.
 - This function should execute immediately.
2. Create an event handler for `breedSelect` that does the following:
 - Retrieve information on the selected breed from the cat API using `fetch()`.
 - Make sure your request is receiving multiple array items!
 - Check the API documentation if you are only getting a single object.
 - For each object in the response array, create a new element for the carousel.
 - Append each of these new elements to the carousel.
 - Use the other data you have been given to create an informational section within the