

个人作品集

姓名：姜佐腾

电话：18767115295



简易Web终端


A screenshot of a web browser window displaying a terminal interface. The browser's address bar shows 'localhost:9000'. The terminal window has a dark blue background and white text. It shows a Windows PowerShell session with the following content:
开始连接
连接成功
Windows PowerShell
C:\Users\lance\OneDrive - hdu.edu.cn\Project\toys\webshell\server (C) Microsoft Corporation
PS C:\Users\lance\OneDrive - hdu.edu.cn\Project\toys\webshell\server Active code page: 65001
PS C:\Users\lance\OneDrive - hdu.edu.cn\Project\toys\webshell\server ls
l: C:\Users\lance\OneDrive - hdu.edu.cn\Project\toys\webshell\server
The terminal then displays a directory listing with columns for Mode, LastWriteTime, Length, and Name.

Mode	LastWriteTime	Length	Name
da---l	2018/11/15 17:12		node_modules
da---l	2018/11/15 17:04		public
-a---l	2018/11/15 21:22	1677	app.js
-a---l	2018/11/15 18:50	406	myconsole.js
-a---l	2018/11/15 17:12	29389	package-lock.json

PS C:\Users\lance\OneDrive - hdu.edu.cn\Project\toys\webshell\server input here

WebGL&Canvas

交互式动画作业&虚拟仿真程序

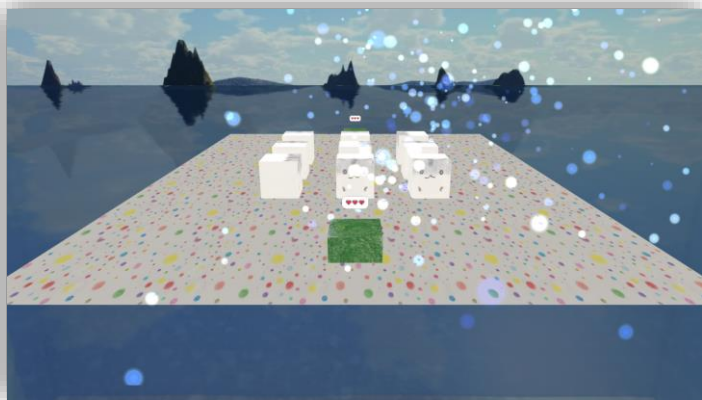

PWA、Tensorflow.js、GPU.js

色盲辅助程序（毕业设计）



使用node.js+对象存储

公众号kindle书库




使用Websocket(MQTT)获取数据

使用非对称加密的活动页


这个活动页通过Mqtt和各个功能模块通信，并且全程使用RSA加密，并且自己配置了Webpack

CRUD的模块自己参考Express封装了Mqtt，实现了类似Express的app.get()这种方式的开发

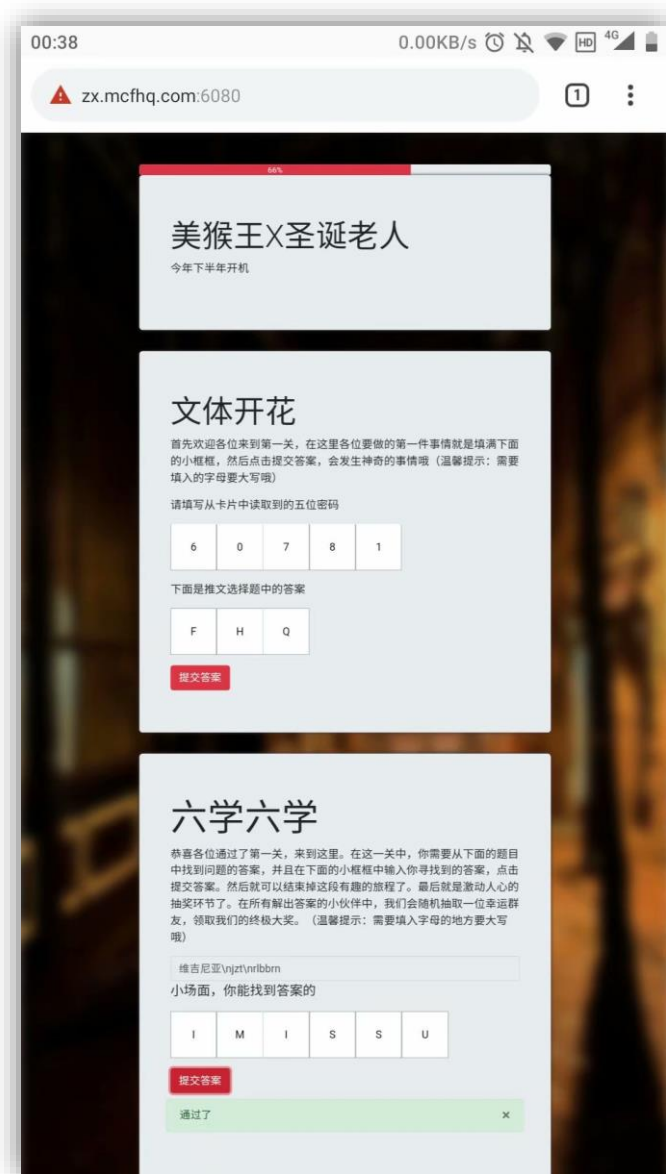

使用Node.js+Vue.js

Web站点

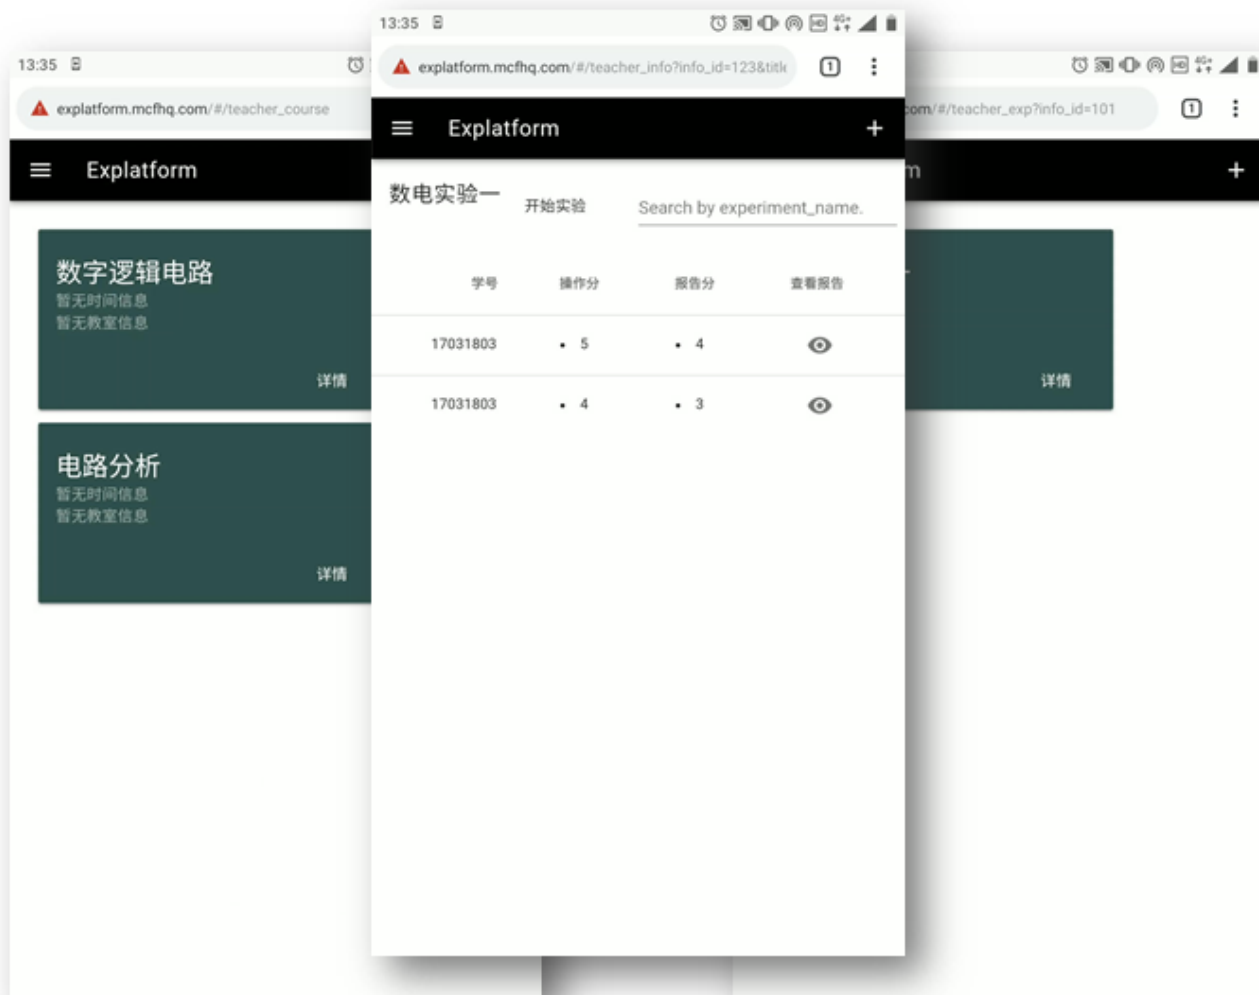


使用Node.js+Vue.js

Web站点



量化投资策略设计和开发

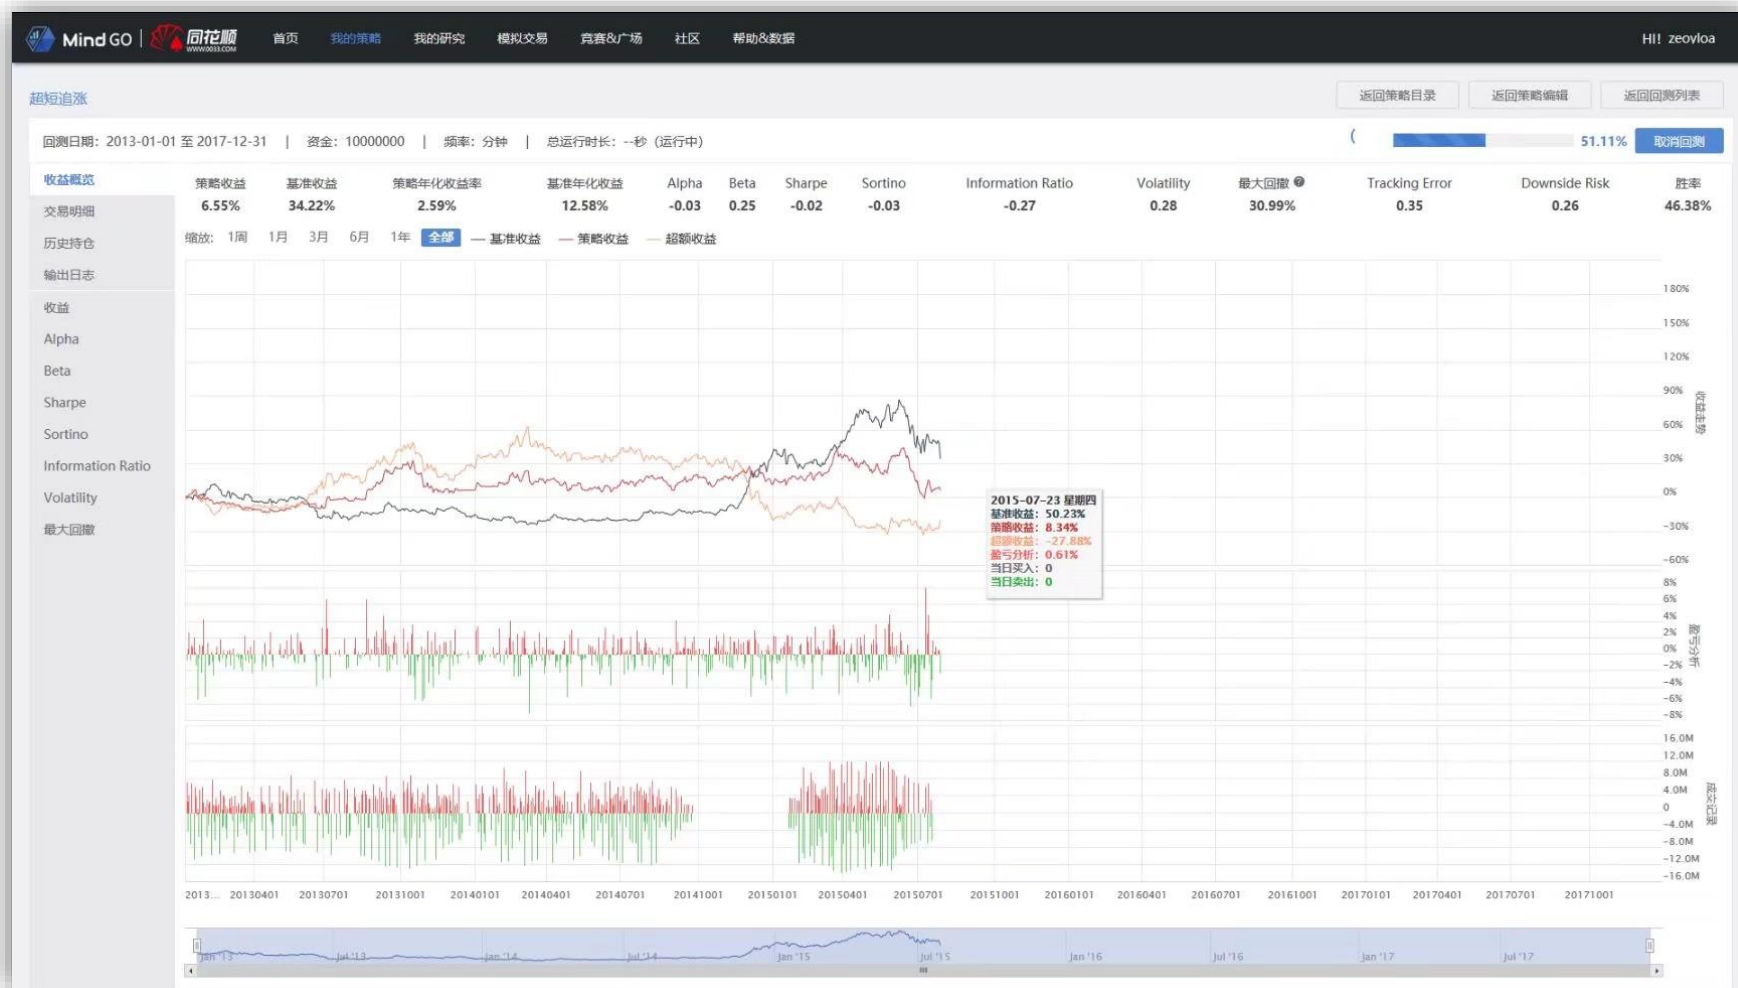

在Nvidia DeepLearning Institute

通过CUDA学习

