


Same output box. Which query judges it?

(a) Change the readout, keep the prediction

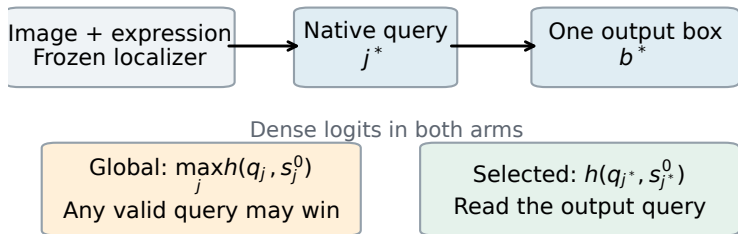


(b) Change the target only on wrong boxes

Fixed request state	Exists E	Emit Y
Absent (N)	0	0
Present, wrong box (W)	1	0
Present, correct box (C)	1	1


Two labels $\times$ two readouts; Native boxes never change

(c) Measured effects

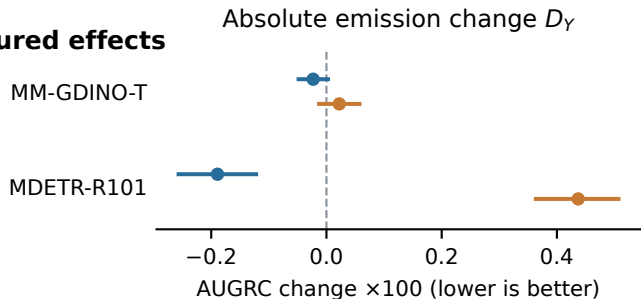

Three-seed means; paired 95% CI

● FineCops val

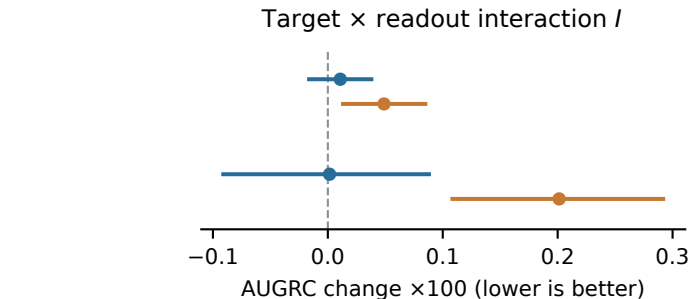

● gRef source-disjoint