



# Master's thesis

Mikkel Storgaard Knudsen

FShark

prut PRUT prut

Advisor: Cosmin eller Troels

Handed in: July 22, 2018



## **Abstract**

Here is a nice abstract  
prut prut

# Contents

<b>1</b>	<b>Introduction</b>	<b>3</b>
<b>2</b>	<b>Background</b>	<b>10</b>
<b>3</b>	<b>The FShark language</b>	<b>12</b>
<b>4</b>	<b>FSharkPrelude</b>	<b>18</b>
<b>5</b>	<b>The FShark Compiler and Wrapper</b>	<b>20</b>
<b>6</b>	<b>The Futhark C# backend</b>	<b>28</b>
<b>7</b>	<b>Benchmarks and evaluation</b>	<b>37</b>
<b>8</b>	<b>Current limitations</b>	<b>39</b>
<b>9</b>	<b>Method</b>	<b>40</b>
<b>10</b>	<b>Related work</b>	<b>41</b>
<b>11</b>	<b>Conclusion and future work</b>	<b>42</b>
<b>12</b>	<b>Array handling in FShark</b>	<b>43</b>
<b>13</b>	<b>FSharks interoperability between F# and Futhark (C#)</b>	<b>44</b>
	13.0.1 Pros and cons of the current design . . . . .	45
	13.1 The future of FShark interoperability . . . . .	46



# Chapter 1

## Introduction

Developers worldwide are, and have always been, on the lookout for increased computing performance. Until recently, the increased performance could easily be achieved through advances within raw computing power, as CPU's had steadily been doubling their number of on-chip transistors, in rough accordance to Moore's Law (citér her).

However, the performance increases in CPU design has now slowed down significantly, due to physical limitations to CPU design.

Instead of adding more transistors or increasing the clock frequency in newer CPUs, the CPU manufacturers have instead opted to split their single-core CPUs up into multicore CPUs, which means that any program can now run several threads on the CPU's cores, simultaneously. The CPU's cores are specialized in advanced computations 's cores are

TODO: TODO: udfyld om hvordan GPU'en har mange flere kerner, og kan bruges til relativt simple operationer

In sectors like the financial sector and within the natural sciences, there is a need for handling large amounts of data in an effective manner. With algorithmic trading gaining ground within the trading sector, the trader who can analyze incoming buy- and sell-offers the fastest, usually has the advantage at the exchanges.

Likewise, faster computing can increase productivity for chemists and biologists who are analysing large datasets, physicists can run faster simulations, and so on. All of these activities are based on executing relatively simple computations on enormous datasets. The hundreds of simultaneous threads on the GPUs are, compared to the CPU, optimal for performing these calculations as fast as possible, which is why GPUs are increasingly being used for *General Purpose Computing on Graphics Processing Units*.

### Parallel programming in Futhark

GPU programming is in principle easily available for everyone. As long as the user has access to a GPU and a reasonable PC for developing software, it just takes a bit of effort and reading to get started with CUDA, OpenCL or similar programming. Realistically

however, it takes much more than just a little effort to start writing one's own GPU programs.

Take for instance the function  $f(x) = ax + y$ . In figure 1.1 we see the function implemented as a CUDA program. In this program, we are defining the kernel `saxpy` itself, and also manually copying data back and forth between the GPU. Compared to the same program written in Futhark (figure 1.2.)

Whereas the CUDA kernel needs to check whether the current thread is outside of the bounds of the input data, the equivalent kernel in Futhark is simply a declaration of it's function. Also, the Futhark version does not bother with getting array elements by the current thread ID.

In the main function itself, the initial lists are generated by functions, and the user doesn't have to allocate space on neither the computer *host*, or the GPU *device*. The hard work is done by a Futhark SOAC, which is eventually compiled into a kernel

Of course, Futhark is compiled into either C- or Python code that does indeed contain `malloc` calls, GPU kernels with bounds checking, and so on, but that part is very well hidden from the Futhark programmers themselves. All in all, writing effective GPU programs becomes much more accessible when it's possible to do in a declarative manner, like Futhark, without also having to the minute details that comes with GPU computations.

---

```

#include <stdio.h>

__global__
void saxpy(int n, float a, float *x, float *y)
{
    int i = blockIdx.x*blockDim.x + threadIdx.x;
    if (i < n) y[i] = a*x[i] + y[i];
}

int main(void)
{
    int N = 1<<20;
    float *x, *y, *d_x, *d_y;
    x = (float*)malloc(N*sizeof(float));
    y = (float*)malloc(N*sizeof(float));

    cudaMalloc(&d_x, N*sizeof(float));
    cudaMalloc(&d_y, N*sizeof(float));

    for (int i = 0; i < N; i++) {
        x[i] = 1.0f;
        y[i] = 2.0f;
    }

    cudaMemcpy(d_x, x, N*sizeof(float), cudaMemcpyHostToDevice);
    cudaMemcpy(d_y, y, N*sizeof(float), cudaMemcpyHostToDevice);

    // Perform SAXPY on 1M elements
    saxpy<<<(N+255)/256, 256>>>(N, 2.0f, d_x, d_y);

    cudaMemcpy(y, d_y, N*sizeof(float), cudaMemcpyDeviceToHost);

    cudaFree(d_x);
    cudaFree(d_y);
    free(x);
    free(y);
}

```

---

Figure 1.1:  $ax + y$  in CUDA



---

```
let saxpy (a : f32) (x : f32) (y : f32) : f32 =  
  a*x+y  
  
let main =  
  let N = 1<<20  
  let a = 2f32  
  let xs = replicate N 1f32  
  let ys = replicate N 2f32  
  let ys = map2 (saxpy a) xs ys  
  in ys
```

---

Figure 1.2:  $ax + y$  in Futhark

## Motivation

FShark is intended to be a way of writing and utilizing Futhark, without actually having to write or interact with the Futhark language and compiler itself. Besides some tooling and an F# SOAC library, it primarily consists of the FShark compiler that compiles from F# source code to Futhark source code, and the Futhark C# generator, which compiles Futhark programs as either standalone C# programs or -libraries.

As much as most developers are happy to increase performance on big computations, it is not always an option to incorporate an extra language into an already existing programming language. At this moment, using Futhark in either a C#- or F# project is a contrived process that usually requires spawning a subprocess with a `futhark-opencl` C program from inside one of the .NET projects.

In order to use Futhark natively in .NET languages, it is therefore necessary to write a backend for Futhark in a .NET language. For FShark, I have chosen to implement this backend in C#, as the Futhark intermediate code `ImpCode`<sup>1</sup> is trivial to translate into imperative C# statements and expressions. Also, there are C# libraries available which supply OpenCL bindings, which are needed to implement the necessary OpenCL constructs from `ImpCode`.

It is my belief that exporting Futhark programs as .NET executables and -libraries will lower the barrier to Futhark usage in .NET projects significantly, hopefully increasing the all-round number of Futhark users, and in the long term, increasing utilization of GPU programming and making it more widely available.

However, one could do even more than just exporting Futhark to .NET, to increase accessibility:

As tens of thousands of programmers worldwide (CHECK NUMBER JEEEEZ) are already writing F# programs, and that most of F#'s functional language features can be directly translated into equivalent Futhark features, it became worthwhile to investigate whether it was possible to design a way for users to both write and utilize Futhark in F# projects, without ever actually touching the Futhark language or compiler themselves. Instead, users can write their data parallel F# modules in FShark, and compile these modules into Futhark libraries automatically.

In this case, it would be possible to get Futhark speeds in F# programs, without doing much more than installing the Futhark compiler locally, and adding the required FShark libraries to the F# project.

It is my belief that being able to achieve Futhark performance in regular F# programs almost automatically, will make it significantly easier for people to adapt to Futhark programming.

(SOME MORE MORE SOME MORE)

---

<sup>1</sup> which stands for Imperative Code

## The contributions of this thesis

The contributions of this thesis are as follows:

1. The `FSharkPrelude`:

The `FSharkPrelude` is a subset of the Futhark SOACs, ported to `F#`. To write an `FShark` program, the user is directed to limit himself to the SOACs in the `FSharkPrelude`. This means exchanging `Array.map` for `FSharkPrelude.Map`, `Array.foldBack` for `FSharkPrelude.foldr`, and so on. However, the `FSharkPrelude` carries the guarantee, that all `FSharkPrelude` functions works equivalently to their Futhark SOAC namesakes. This prelude, together with the `F#` subset chosen for `FShark`, makes it possible to write `F#` programs which, when translated to Futhark code, are equivalent to their Futhark counterparts.

2. An `F#` subset translatable with `FShark`:

As `F#` is not only a multi-paradigm language, but also has access to the entire standard .NET library, it was required to make `FShark` support only a subset of `F#`. This has been implemented by whitelisting only the `F#`-to-Futhark translatable types, constructs and expressions in the `FShark` compiler. Furthermore, no other module imports than `FSharkPrelude` are allowed. This subset is of course documented for users.

3. The `FShark` Compiler and Wrapper:

The `FShark` Compiler and Wrapper takes a module written in `FShark` as input, converts the `FShark` module into a compiled Futhark `C#` module, and makes it available to the `F#` program, all at runtime. The pipeline is described in sec ??

4. A `C#` backend for Futhark:

To actually use Futhark in `C#` projects (and transitively `F#` projects), it was necessary to develop and add a `C#` backend to the Futhark compiler. This backend is equivalent in functionality to the `C-` and the `Python` backends that are already available.

## **Roadmap**

The main part of this thesis is split in four parts. blaaaah

## Chapter 2

# Background

FSharp is built on the interaction between Futhark, F# and C#, wherefore WE SHOULD HAVE A BETTER INTRODUCTION FOR THIS CHAPTER.

### F#

F# is a relatively young .NET-based language, first released in 2003. It is a strongly-typed multiple-paradigm language, with a syntax that is primarily functional, resembling OCaml. Although F# is not as widely used as C#, Java and the like, it is currently experiencing increasing adaptation among developers[?]. Besides supporting multiple paradigms and a reasonable subset of functional language features (such as pattern matching), F#'s primary strength is its interoperability with the rest of the .NET ecosystem. Like C#, F# programs are compiled into Microsoft's Common Intermediate Language, and executed using Microsoft's Common Language Runtime.

Therefore, F# programs have full access to the standard .NET library, just as it can also readily import and use classes and methods from arbitrary C# libraries.

For FSharp, F# has been selected as a source language for several reasons. First, most of F#'s syntax is readily translatable into Futhark syntax, as long as the programmer stays away from using any of F#'s non-functional constructs, like `async` or its object oriented features. Second, as F# effortlessly interoperates with C# programs, and C# has plenty of OpenCL libraries available, we can write imperative OpenCL-powered programs in C#, for use in F# projects.

### Futhark

Quoting from Futhark's own homepage,

Futhark is a small programming language designed to be compiled to efficient parallel code. It is a statically typed, data-parallel, and purely functional array

language in the ML family, and comes with a heavily optimising ahead-of-time compiler that presently generates GPU code via OpenCL, although the language itself is hardware-agnostic.

So far, plenty of handwritten GPU benchmark programs implemented in CUDA et al, has been ported to Futhark, with significant performance gains as a result. [?]. With these results in mind, it makes sense to start implementing other parallelizable algorithms and programs in Futhark. However, in the grand scheme of things, Futhark is still a relatively obscure programming language, and is almost solely used in academic settings.

With Futhark being a purely functional programming language, it has very few imperative language constructs available, and the few that it has, like in-place updates, are merely syntactic sugar for other existing library function calls.

As Futhark's main functionality is generating OpenCL kernels, it is in principle possible to compile Futhark programs for any language that are able to interface with the OpenCL API.

As a target language for F# translations, Futhark is ideal as we can identify and relatively easily translate a subset of the F# language to equivalent Futhark code, as the syntax itself is very similar. Even though F# also allows plenty of imperative and object oriented programming, FShark blocks the user from using these constructs, by failing at FShark compile time.

## C#

C# C# C# C#

## A primer on OpenCL

## **Chapter 3**

# **The FShark language**

$t$	$::=$	$\text{int8} \mid \text{int16} \mid \text{int} \mid \text{int64}$	(Integers)
		$\text{uint8} \mid \text{uint16} \mid \text{uint} \mid \text{uint64}$	(Unsigned integers)
		$\text{single} \mid \text{double}$	(Floats)
		$\text{bool}$	(Booleans)
		$(t_0 * \dots * t_n)$	(Tuples)
		$\{\text{id}_0 : t_0; \dots; \text{id}_n : t_n\}$	(Records)
		$t_0 \text{ array}$	(Arrays)
$k$	$::=$	$n$	(Integer)
		$f$	(Float)
		$b$	(Boolean)
		$(k_0, \dots, k_n)$	(Tuple)
		$\{\text{id}_0 = k_0; \dots; \text{id}_n = k_n\}$	(Record)
		$[k_0; \dots; k_n]$	(Array)
$p$	$::=$	$\text{id}$	(Name pattern)
		$(p_0, \dots, p_n)$	(Tuple pattern)

Figure 3.1: The FShark syntax





## F# operators available in FShark

The F# subset chosen for FShark is described in this subsection. Note that all of

### Arithmetic operators

The set of supported arithmetic operators is addition (+), binary subtraction and unary negation (-), multiplication (\*), division (/) and modulus (%).

### Boolean operators

FShark currently supports logical AND (&&), logical OR (||), less- and greater-than (<, >), less- and greater-or-equal (<=, >=), equality (=), inequality (<>) and logical negation (not).

### Special operators

FShark also supports some of F#'s syntactic sugar. These operators might not have direct Futhark counterparts, but their applications can be rewritten in Futhark for equivalent functionality. The supported operators are back- and forward pipes (<| and |>), and the range operator ( $e_0 \dots e_1$ ), which generates the sequence of numbers in the interval  $[e_0, e_1]$ . Note that in FShark, the range operator must be used inside an array as so `[| $e_0 \dots e_1$ |]` so we adhere to using arrays and not lists in our FShark programs.

Figure 3.3: FShark operators

these operators are overloaded and defined for all integer and floating point types in F#.

## F# standard library functions available in FShark

FShark supports a subset of the F# standard library. These are functions that are imported in F# modules by default.

Currently, bitwise operators like bitwise-AND and bitwise-OR are missing, but they should be relatively simple to add to the FShark subset, by adding them to the set of supported operators in the FShark compiler.

## On the F# subset selected for FShark

For selecting the F# subset to support in FShark, I chose to look at what functions that were included in F#'s prelude. That is, the functions that are available in an F# program without having to open their containing module first. Fortunately, F# opens several modules by default of which I only needed to look in two different ones, to be able to support a reasonable amount of F# built-ins in FShark.

The primary module used in my supported F# subset is the module `FSharp.Core.Operators`. This module contained not only the standard arithmetic described in figure 3.3, but also most<sup>1</sup> of the functions shown in the figure 3.4. Except for unit type functions like `failwith`, `exit` and `async`, most of the functions and operators `FSharp.Core.Operators` have direct counterparts in Futhark's prelude, with equivalent functionality: All except for four of operators and functions chosen for FShark are in fact implemented in

<sup>1</sup>except for some conversion functions, found in `FSharp.Core.ExtraTopLevelOperators`

**id**

The identity function.

**Common math function**

The square root function (`sqrt`), the absolute value (`abs`), the natural exponential function (`exp`), the natural- and the decimal logarithm (`log` and `log10`).

**Common trigonometric functions**

Sine, cosine and tangent functions (both standard and hyperbolic): `sin`, `cos`, `tan`), `sinh`, `cosh` and `tanh`. Also one- and two-argument arctangent: `atan` and `atan2`.

**Rounding functions**

FShark supports all of F#'s rounding functions: `floor`, `ceil`, `round` and `truncate`.

**Number conversion functions**

FShark supports all of F#'s number conversion functions. For all the following functions  $t, te = e', e : t_0, e' : t$ , barring exceptions like trying to convert a too large 64-bit integer into a 32-bit integer.

The conversion functions available are `int8`, `int16`, `int`, `int64`, `uint8`, `uint16`, `uint`, `uin64`, `single`, `double`, `bool`.

**Various common number functions**

`min`, `max`, `sign` and `compare`.

Figure 3.4: FShark operators

Futhark's `math.fut` library. It was therefore an obvious decision to support these functions and operators in FShark.

However, for the remaining four functions, that didn't have equivalents in Futhark's `math.fut`, their function calls are replaced with their identities instead. In example, whereas the FShark code

---

```
exp x
```

---

is written in Futhark as

---

```
exp x
```

---

because the `exp` function is also available in `math.fut`, the FShark code

---

```
cosh x
```

---

is rewritten as the full hyperbolic sine function instead, as so

---

```
((exp x) + (exp (-x))) / 2.0
```

---

These rewritings are not pretty to look at from a programmer's perspective, but FShark's Futhark code is not meant to be read by humans anyhow.

(MAYBE INVESTIGATE WHETHER INLINING THESE HAS PERFORMANCE PENALTIES)

$e$	$::=$	$k$	Constant
		$v$	Variable
		$(k_0, \dots, k_n)$	(Tuple expression)
		$\{\text{id}_0 = k_0; \dots; \text{id}_n = k_n\}$	(Record expression)
		$[k_0; \dots; k_n]$	(Array expression)
		$e_1 \odot e_2$	(Binary operator)
		$-e$	(Prefix minus)
		$\text{not } e$	(Logical negation)

Figure 3.5: f binary operators

$e$	$::=$	$k$	Constant
		$v$	Variable
		$(k_0, \dots, k_n)$	(Tuple expression)
		$\{\text{id}_0 = k_0; \dots; \text{id}_n = k_n\}$	(Record expression)
		$[k_0; \dots; k_n]$	(Array expression)
		$e_1 \odot e_2$	(Binary operator)
		$-e$	(Prefix minus)
		$\text{not } e$	(Logical negation)

Figure 3.6: FShark SOACs

### The correctness of the FShark subset.

When transpiling code from one language to another, it is absolutely vital that the programmer can trust, that the resulting code in the target language is semantically equivalent to the source code. In FSharks case, it means that any program written using the FShark subset, must have the same result no matter whether it is run natively as F# code, or it is run as FShark compiled Futhark code.

I.e., one could imagine a programming language which had defined the function `log` not as the natural logarithm, but instead the binary logarithm. In such a case, the translation from that language to Futhark would still go without a hitch, and without any type errors to hint at the impending catastrophe. However, the native result with the Futhark result would be wildly different.

To ensure that every operator and function in the FShark subset has equivalent results, no matter whether the FShark code is run as native F# code, or compiled into Futhark, I have written a test suite with unit tests for each element in the F# subset.

This is described further in chapter ??

(THESE ARE NOT ACTUALLY DONE YET) (Are unit tests enough?)

LANGUAGE REFERENCE

## Chapter 4

# FSharkPrelude

Besides defining an F# subset suitable for Futhark translation, it was also imperative to create a library of SOACs and array functions for FShark, to make it possible to write programs with parallel higher-order array functions.

Similarly to how the subset of math functions chosen from F# to include in the FShark was chosen, the SOACs and array function included in the FSharkPrelude has been picked directly from the Futhark libraries `futlib/array.fut` and `futlib/soacs.fut`. The FSharkPrelude doesn't discriminate between array functions and SOACs, as maintaining and importing two different prelude files in FShark was needlessly complicated.

The FSharkPrelude consists of functions which are directly named after their Futhark counterparts, and have equivalent functionality. This prelude, together with the FShark subset, is what makes up the FShark language. When FShark developers are writing modules in FShark, they are guaranteed that their FShark programs has the same results, no matter whether their programs are executed like native F# code, or compiled and executed as Futhark.

The FSharkPrelude versions of Futhark functions are defined in three different ways.

Functions like the SOAC `map` and the array function `length` have direct F# equivalents, and are therefore implemented as calls to `Array.map` and `Array.length` respectively. For `map` for example, we have the following definition:

---

```
module FSharkPrelude =  
  ...  
  
  let Map f aa =  
    Array.map f aa  
  
  ...
```

---

Some Futhark SOACs, like `reduce`, takes a neutral element as one of the arguments in their function calls, whilst their F# counterparts (`Array.reduce`) does only

take an operator and an array as arguments. To define the FShark SOAC so that it is equivalent to the Futhark version, it has been defined as so:

---

```

module FSharkPrelude =
  ...

  let Reduce (op: 'a -> 'a -> 'a) (neutral : 'a) (xs : 'a array) =
    let xs' = Array.append [|neutral|] xs
    in Array.reduce op xs'

```

---

Other functions, like the map functions which takes multiple arrays as arguments, require a bit of assembly first. For those map functions, we zip the arguments before using `Array.map` as usual:

---

```

module FSharkPrelude =
  ...

  let Map5 f aa bb cc dd ee =
    let curry f (a,b,c,d,e) = f a b c d e
    let xs = Zip5 aa bb cc dd ee
    in Array.map (curry f) xs

```

---

Lastly, some functions does not have F# counterparts. In example, we implement `scatter` using a for-loop:

---

```

module FSharkPrelude =
  ...

  let Scatter (dest : 'a array) (is : int array) (vs : 'a array) : 'a array =
    for (i,v) in Zip is vs do
      dest.[i] <- v
    dest

```

---

The complete list of available SOACs and array functions is available in appendix ??.

Note that calls to FSharkPrelude functions are caught and exchanged for Futhark functions during the FShark compilation, as described in sec ??.

Several of Futhark's SOACs, such as `map`, already has F# versions that are directly equivalent.

But there are several issues with just letting the FShark programmer use But many of these F# functions are contained in HER KOMMER DER MERE

## Chapter 5

# The FShark Compiler and Wrapper

### Introduction

Parsing and building a regular F# program is trivial when using official build tools like `msbuild` or `fsharpc`. But in the case of `FShark`, we are not interested in the final result from the F# compiler, but merely its half-finished product.

As the F# Software Foundation offers the official F# Compiler as a freely available NuGet package for F# projects, we can use this package `FSharp.Compiler.Services` to parse the entire input `FShark` program and give us a Typed Abstract Syntax Tree of the `FSharp` expressions therein.

The F# Software Foundation actively encourages developers to create projects using the F# compiler library, they have published the collected F# compiler as a NuGet package, alongside a tutorial??on the usage of the various compiler parts.

For `FShark`, the `Compiler Services` package is used to compile a Typed Abstract Syntax Tree from a wellformed `FShark` source code file, which we then convert into- and print as a valid Futhark program. The Typed Abstract Syntax Tree is merely an AST that already has tagged all the contained expressions with their respective types.

We'll start with a detailed explanation of the `FShark` Compiler Pipeline.

### The FShark Compiler Pipeline in practice

To examine the compiler pipeline in action, we'll go through the motions with the small example program displayed in figure 5.1.

We begin by constructing an instance of the `FSharkWrapper`. It has the following mandatory arguments:

#### **libName**

This is the library name for the `FShark` program. In the final Futhark `.cs`

---

```

1 module FSharkExample
2 open FShark.Main
3
4 [<EntryPoint>]
5 let main argv =
6     let wrapper =
7         new FSharkWrapper (
8             libName="ExampleModule",
9             tmpRoot="/home/mikkel/FShark",
10            preludePath=
11                ↪ "/home/mikkel/Documents/fshark/FSharkPrelude/bin/Debug/FSharkPrelude.dll",
12            openCL=true,
13            unsafe=true,
14            debug=false
15        )
16    wrapper.AddSourceFile "../srcs/ExampleModule.fs"
17    wrapper.CompileAndLoad
18    let xs = [|1;2;3;4|]
19    let input = [|xs|] : obj array
20    let xs' = wrapper.InvokeFunction "MapPlusTwo" input :?> int
21    ↪ array
22    printfn "Mapping (+2) over %A gives us %A" xs xs'
23    0

```

---

Figure 5.1: An F# program using FShark

and `.dll` files, the main class will have the same name as the `libName`. This doesn't really matter if FShark is just used as a JIT compiler, but it's good to have a proper name if the user only wants to use the compiler parts of FShark.

#### **tmpRoot**

The FShark compiler works in its own temporary directory. This argument must point to a directory where F# can write files and execute subprocesses (Futhark- and C# compilers) which also has to write files.

#### **preludePath**

The FShark compiler needs the FShark prelude available to compile FShark programs.

#### **openCL**

Although Futhark (and therefore FShark) is most effective on OpenCL-enabled computers, the benchmarks in ?? still show a significant speed increase for non-OpenCL Futhark over native F# code. Therefore, FShark is also available for non-OpenCL users. Use this flag to tell FShark whether Futhark should compile C# with or without OpenCL.

#### **unsafe**

For some Futhark programs, the Futhark compiler itself is unable to tell whether certain array operations or SOAC usages are safe, and will stop the compilation, even though the code should (and does) indeed work. To enable these unsafe operations, pass a `true` flag to the compiler.

#### **debug**



Passing the debug flag to the FShark compiler enables various runtime debugging features, for instance benchmarking the time it takes to run various parts of the compiler.

Now, we can pass a source file to the FShark wrapper, compile<sup>1</sup> it and load it into the FShark wrapper object.

To use the compiled FShark function, we must first wrap our designated input in an `obj` array. In this case, our chosen FShark function takes one argument, an `int` array. We define this array, and construct an argument array containing this single element. If the FShark function takes two arguments, we define an input `obj` array with two elements, and so forth. It is important to declare the input array as an `obj` array. Otherwise, F#'s own type checker might very well faultily infer the input array as something else. In this particular case, `input` would've been inferred as being an `int array array`, until we declared its type specifically.

We then invoke the desired function through the wrapper. As all reflection-invoked functions return a value of type `obj`, we need to downcast this object manually. In this example, we use F#'s downcast operator (`:?>`) to declare the return value as an `int` array. The actual return type is always the same as the return type declared in the source FShark file.

## When FShark Wrapper Compiles

The general way to compile and load an FShark program into the FShark Wrapper, is by adding FShark source files to the wrapper object by calling the `AddSourceFile` method, and followingly calling the `CompileAndLoad` method. Although the FShark wrapper also offers other methods of loading and compilation, this is the primary one, as it initiates the entire FShark compilation pipeline.

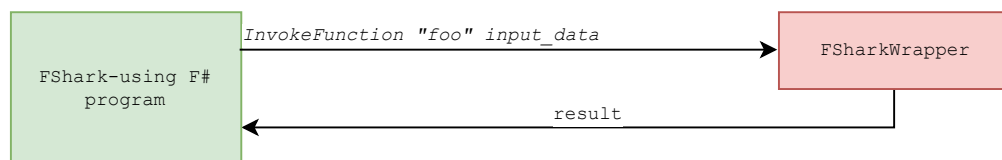


Figure 5.2: The FShark compilation pipeline

When calling `CompileAndLoad`, the supplied FShark source files are concatenated into one long source file, and written to a temporary location. An `FSharpChecker` is then initialized, so we can parse and type check the concatenated source code. The `FSharpChecker` is a class exported by the FSharp Compiler Services, and is a class that lets developers use part of the F# compilation pipeline at runtime.

We supply the `FSharpChecker` with the path to our precompiled `FSharpPrelude` assembly, and then call its `ParseAndCheckProject` method on to receive an assembly value, which contains the complete Typed Abstract Syntax Tree of our FShark program, in the form of an `FSharpImplementationFileDeclaration`.

<sup>1</sup> See subsection ??

If the `FShark` developer followed the guidelines to write a well-formed `FShark` module, the main declaration of the program, the `FSharpImplementationFileDeclaration`, should contain a single `FSharpEntity`, which in turn contains all the remaining declarations in the program.

## The declaration types within F#'s Typed AST

The `FSharpImplementationFileDeclaration` type has three union cases.

### **InitAction of FSharpExpr**

`InitActions` are `FSharpExprs` that are executed at the initialization of the containing entity. These are not supported in `FShark`.

### **Entity of FSharpEntity \* FSharpImplementationFileDeclaration list**

An `Entity` is the declaration of a type or a module. In the case of `FShark`, three different kinds of entities are supported:

**FSharpRecords** are standard record types, and can be translated to `Futhark` records with ease. This entity has an empty `FSharpImplementationFileDeclaration` list.

**FSharpAbbreviations** are type abbreviations, and are easily translated into `Futhark` type aliases. This entity has an empty `FSharpImplementationFileDeclaration` list.

**FSharpModules** are named modules which contains subdeclarations. In this case, we retrieve the subdeclarations from the `FSharpImplementationFileDeclaration` list. The `FShark` compiler supports building `FShark` modules, but current limitations demands that modules are flattened when compiled to `Futhark`. This also means that function name prefixes in function calls are stripped when compiled to `Futhark`.

### **MemberOrFunctionOrValue of FSharpMemberOrFunctionOrValue \* FSharpMemberOrFunctionOrValue**

`F#` doesn't differ between functions and values, which means that a function is merely a value with arguments. A pattern matched `MemberOrFunctionOrValue` value has the form `MemberOrFunctionOrValue (v, args, exp)`, where `v` contains the name and the type of the variable. If the `args` list is empty, `v` is simply a variable. If not, `v` is a function. `exp` contains the `FSharpExpr` that `v` is bound to. An `FSharpExpr` can be anything from a numeric constant to a very long function body.

In figure 5.3 we see a small but valid `FShark` program. It reads like a regular `F#` program, but contains the three vital parts that makes it usable as an `FShark` program.

- The module declaration on the first line declares that the following code is inside a module. In this case, we are declaring the module `ExampleModule`, although we could use any valid `F#` module name. As shown in figure 5.4, the top module declaration falls away during compilation, so only the top module contents are left.

---

```

1  module ExampleModule
2  open FSharkPrelude
3
4  module SomeValues =
5      let Four : int = 4
6
7      let SomePlus (x : int) (y : int) : int = x + y
8
9      [<FSharkEntry>]
10     let TimesTwo (x : int) : int =
11         SomeValues.SomePlus x x
12
13     [<FSharkEntry>]
14     let MapPlusTwo (xs : int array) : int array =
15         Map ((+)2) xs
16
17     let PlusSeven (x : int) : int =
18         SomeValues.SomePlus x 7

```

---

Figure 5.3: A valid FShark program

---

```

let Four : i32 = 4i32
let SomePlus (x : i32) (y : i32) : i32 =
    ((x i32.+ y))
entry TimesTwo (x : i32) : i32 =
    unsafe SomePlus(x) (x)
entry MapPlusTwo (xs : []i32) : []i32 =
    unsafe map (let x = 2i32 in
        (\(y : i32) -> ((x i32.+ y)))) (xs)
let PlusSeven (x : i32) : i32 =
    SomePlus(x) (7i32)

```

---

Figure 5.4: A valid FShark program, compiled to Futhark

- This open statement ensures that the F# Compiler Services has access to the FSharkPrelude during the compilation. It is possible to write an FShark program which doesn't use the FSharkPrelude, but this removes access to the SOACs that we use to write our data parallel programs.
- The [<FSharkEntry>] attributed function TimesTwo ensures that the resulting Futhark library from the FShark compiler has at least one entry point function. Without any entry point functions, we won't have any functions in the final compiled FShark program.

In figure 5.4 we see the resulting Futhark program. For now, we will ignore the transformations that have happened, except for two things: The Map function (called from FSharkPrelude) has been rewritten as the plain Futhark SOAC map in lowercase, and the module SomeValues has been flattened (see sec ?? for future plans.)

This Futhark program is then stored in a temporary location in the user's file system,

$$\begin{aligned}
& \llbracket \text{Entity}(\text{IsFSharpRecord}, [(field_0 : \tau_0), \dots, (field_n : \tau_n)]) \rrbracket \\
& = \text{FSharkRecord}([ (field_0 : \llbracket \tau_0 \rrbracket), \dots, (field_n : \llbracket \tau_n \rrbracket) ]) \\
\\
& \llbracket \text{Entity}(\text{IsFSharpTypeAbbreviation}, alias, \tau) \rrbracket \\
& = \text{FSharkTypeAlias}(alias, \llbracket \tau \rrbracket) \\
\\
& \llbracket \text{Entity}(\text{IsFSharpModule}, [decl_0, \dots, decl_n]) \rrbracket \\
& = [\llbracket decl_0 \rrbracket, \dots, \llbracket decl_n \rrbracket] \\
\\
& \llbracket \text{MemberOrFunctionOrValue}((name, \tau^*, \text{IsEntryFunction}), [(arg_0 : \tau_0), \dots, (arg_n : \tau_n)], e) \rrbracket \\
& = \text{FSharkVal}(\text{IsEntryFunction}, \text{FSharkFunction}([\llbracket \tau_0 \rrbracket, \dots, \llbracket \tau_n \rrbracket], \llbracket \tau^* \rrbracket), name, [arg_0, \dots, arg_n], \llbracket e \rrbracket)
\end{aligned}$$

Figure 5.5: FSharpImplementationFileDeclaration to FSharkDecl translations.

$\llbracket \text{Int8} \rrbracket$	=	Prim Int FInt8	$\llbracket \text{Int16} \rrbracket$	=	Prim Int FInt16
$\llbracket \text{Int32} \rrbracket$	=	Prim Int FInt32	$\llbracket \text{Int64} \rrbracket$	=	Prim Int FInt64
$\llbracket \text{UInt8} \rrbracket$	=	Prim UInt FUInt8	$\llbracket \text{UInt16} \rrbracket$	=	Prim UInt FUInt16
$\llbracket \text{UInt32} \rrbracket$	=	Prim UInt FUInt32	$\llbracket \text{UInt64} \rrbracket$	=	Prim UInt FUInt64
$\llbracket \text{Single} \rrbracket$	=	Prim Float FSingle	$\llbracket \text{Double} \rrbracket$	=	Prim Float FDouble
$\llbracket \text{Boolean} \rrbracket$	=	Prim Bool	$\llbracket \tau \rrbracket$	=	FSharkArray $\llbracket \tau \rrbracket$
$\llbracket (\tau_0 \times \dots \times \tau_n) \rrbracket$	=	FSharkTuple $\llbracket \tau_0 \rrbracket, \dots, \llbracket \tau_n \rrbracket$			

INSERT NOTE ON RULE FOR TUPLE ('a [] \* long [])

Figure 5.6: F# (.NET) types to FSharkIL types

and compiled into as a library, using Futhark’s C# compiler, either with or without OpenCL support. Finally after this compilation, we can invoke the resulting .dll file from within the FShark-using F# program.

## Building FShark from the Typed AST

Only the supported FSharpExpr’s has been listed here, but the full range of FSharp-Expr’s are available on [?].

## FSharp-to-FSharkIL rules

### INTRODUCTION HERE

For these translations, we will disregard that all FSharpExprs are union cases of the F# data type BasicPatterns.

$\llbracket \text{Prim Int FInt8} \rrbracket$	=	i8	$\llbracket \text{Prim Int FInt16} \rrbracket$	=	i16
$\llbracket \text{Prim Int FInt32} \rrbracket$	=	i32	$\llbracket \text{Prim Int FInt64} \rrbracket$	=	i64
$\llbracket \text{Prim UInt FUInt8} \rrbracket$	=	u8	$\llbracket \text{Prim UInt FUInt16} \rrbracket$	=	u16
$\llbracket \text{Prim UInt FUInt32} \rrbracket$	=	u32	$\llbracket \text{Prim UInt FUInt64} \rrbracket$	=	u64
$\llbracket \text{Prim Float FSingle} \rrbracket$	=	f32	$\llbracket \text{Prim Float FDouble} \rrbracket$	=	f64
$\llbracket \text{Prim Bool} \rrbracket$	=	bool	$\llbracket \tau \rrbracket$	=	FSharkA.
$\llbracket (\tau_0 \times \dots \times \tau_n) \rrbracket$	=	FSharkTuple $\llbracket \tau_0 \rrbracket, \dots, \llbracket \tau_n \rrbracket$			

Figure 5.7: FSharkIL types to Futhark types

$\llbracket \text{Const}(obj, \tau) \rrbracket$	=	Const ( $obj, \llbracket \tau \rrbracket$ )
$\llbracket \text{Value}(v) \rrbracket$	=	Var ( $v$ )
$\llbracket \text{AddressOf}(v) \rrbracket$	=	$\llbracket v \rrbracket$
$\llbracket \text{NewTuple}(-, [e_0, \dots, e_n]) \rrbracket$	=	Tuple ( $\llbracket [e_0, \dots, e_n] \rrbracket$ )
$\llbracket \text{NewRecord}((v_0 : \tau_0 * \dots * v_n : \tau_n), [e_0, \dots, e_n]) \rrbracket$	=	Record ( $\llbracket (v_0, [e_0]), \dots, (v_n, [e_n]) \rrbracket$ )
$\llbracket \text{NewArray}(\tau, [e_0, \dots, e_n]) \rrbracket$	=	List ( $\llbracket \tau \rrbracket, \llbracket [e_0, \dots, e_n] \rrbracket$ )
$\llbracket \text{TupleGet}(-, i, e) \rrbracket$	=	TupleGet ( $\llbracket e \rrbracket, i$ )
$\llbracket \text{FSharpFieldGet}(e, -, field) \rrbracket$	=	RecordGet ( $field, \llbracket e \rrbracket$ )
$\llbracket \text{Call}(-, \text{GetArray}, -, nil, [e_0, e_1]) \rrbracket$	=	ArrayIndex ( $\llbracket e_0 \rrbracket, \llbracket e_1 \rrbracket$ )
$\llbracket \text{Call}(-, name, -, nil, [e_0, \dots, e_n]) \rrbracket$	=	Call ( $name, \llbracket [e_0, \dots, e_n] \rrbracket$ )
$\llbracket \text{Call}(-, name, -, \tau, [e_0, \dots, e_n]) \rrbracket$	=	TypedCall ( $\llbracket \tau \rrbracket, name, \llbracket [e_0, \dots, e_n] \rrbracket$ )
$\llbracket \text{Call}(-, infixOp, -, \tau, [e_0, e_1]) \rrbracket$	=	InfixOp ( $infixOp, \llbracket \tau \rrbracket, \llbracket e_0 \rrbracket, \llbracket e_1 \rrbracket$ )
$\llbracket \text{Call}(-, unaryOp, -, \tau, [e_0]) \rrbracket$	=	UnaryOp ( $unaryOp, \llbracket \tau \rrbracket, \llbracket e_0 \rrbracket$ )
$\llbracket \text{Let}(v, e_0, e_1) \rrbracket$	=	LetIn ( $v, \llbracket e_0 \rrbracket, \llbracket e_1 \rrbracket$ )
$\llbracket \text{IfThenElse}(e_0, e_1, e_2) \rrbracket$	=	If ( $\llbracket e_0 \rrbracket, \llbracket e_1 \rrbracket, \llbracket e_2 \rrbracket$ )
$\llbracket \text{Lambda}(v : \tau, e) \rrbracket$	=	Lambda ( $v, \llbracket \tau \rrbracket, \llbracket e \rrbracket$ )
$\llbracket \text{Application}(func, -, [e_0, \dots, e_n]) \rrbracket$	=	Application ( $\llbracket func \rrbracket, \llbracket [e_0, \dots, e_n] \rrbracket$ )
$\llbracket \text{TypeLambda}(e) \rrbracket$	=	$\llbracket e \rrbracket$
$\llbracket \text{DecisionTree}(-, -) \rrbracket$	=	Pass
$\llbracket \text{DecisionTreeSuccess}(-, -) \rrbracket$	=	Pass

Figure 5.8: FSharpExpr expressions to FSharkIL

$\llbracket \text{Const}(obj, \tau) \rrbracket$	$=$	$obj[\tau]$
$\llbracket \text{Var}(v) \rrbracket$	$=$	$v$
$\llbracket \text{Tuple}(e_0, \dots, e_n) \rrbracket$	$=$	$(\llbracket e_0 \rrbracket, \dots, \llbracket e_n \rrbracket)$
$\llbracket \text{Record}([(v_0, e_0), \dots, (v_n, e_n)]) \rrbracket$	$=$	$\{v_0 = \llbracket e_0 \rrbracket, \dots, v_n = \llbracket e_n \rrbracket\}$
$\llbracket \text{List}(\llbracket \tau \rrbracket, [\llbracket e_0 \rrbracket, \dots, \llbracket e_n \rrbracket]) \rrbracket$	$=$	$[\llbracket e_0 \rrbracket, \dots, \llbracket e_n \rrbracket]$
$\llbracket \text{TupleGet}(\llbracket e \rrbracket, i) \rrbracket$	$=$	$\llbracket e \rrbracket.i$
$\llbracket \text{RecordGet}(field, e) \rrbracket$	$=$	$\llbracket e \rrbracket.field$
$\llbracket \text{ArrayIndex}(e_{arr}, [e_0, \dots, e_n]) \rrbracket$	$=$	$\llbracket e_{arr} \rrbracket [\llbracket e_0 \rrbracket, \dots, \llbracket e_n \rrbracket]$
$\llbracket \text{Call}(name, [e_0, \dots, e_n]) \rrbracket$	$=$	$name(\llbracket e_0 \rrbracket) \dots (\llbracket e_n \rrbracket)$
$\llbracket \text{TypedCall}(\llbracket \tau \rrbracket, name, [\llbracket e_0 \rrbracket, \dots, \llbracket e_n \rrbracket]) \rrbracket$	$=$	$\llbracket \tau \rrbracket.name(\llbracket e_0 \rrbracket) \dots (\llbracket e_n \rrbracket)$
$\llbracket \text{InfixOp}(infixOp, \llbracket \tau \rrbracket, \llbracket e_0 \rrbracket, \llbracket e_1 \rrbracket) \rrbracket$	$=$	$(\llbracket e_0 \rrbracket) \llbracket \tau \rrbracket.infixOp(\llbracket e_1 \rrbracket)$
$\llbracket \text{UnaryOp}(unaryOp, \llbracket \tau \rrbracket, \llbracket e_0 \rrbracket) \rrbracket$	$=$	$\llbracket \tau \rrbracket.unaryOp(\llbracket e_0 \rrbracket)$
$\llbracket \text{LetIn}(v, \llbracket e_0 \rrbracket, \llbracket e_1 \rrbracket) \rrbracket$	$=$	<b>let</b> $v = \llbracket e_0 \rrbracket$ <b>in</b> $\llbracket e_1 \rrbracket$
$\llbracket \text{If}(\llbracket e_0 \rrbracket, \llbracket e_1 \rrbracket, \llbracket e_2 \rrbracket) \rrbracket$	$=$	<b>if</b> $\llbracket e_0 \rrbracket$ <b>then</b> $\llbracket e_1 \rrbracket$ <b>else</b> $\llbracket e_2 \rrbracket$
$\llbracket \text{Lambda}(v, \llbracket \tau \rrbracket, \llbracket e \rrbracket) \rrbracket$	$=$	$\backslash(v : \llbracket \tau \rrbracket) \rightarrow \llbracket e \rrbracket$
$\llbracket \text{Application}(\llbracket func \rrbracket, [\llbracket e_0 \rrbracket, \dots, \llbracket e_n \rrbracket]) \rrbracket$	$=$	$(\llbracket func \rrbracket)(\llbracket e_0 \rrbracket) \dots (\llbracket e_n \rrbracket)$
$\llbracket \text{Pass} \rrbracket$	$=$	$\epsilon$

Figure 5.9: FSharkIL expressions to Futhark

## Chapter 6

# The Futhark C# backend

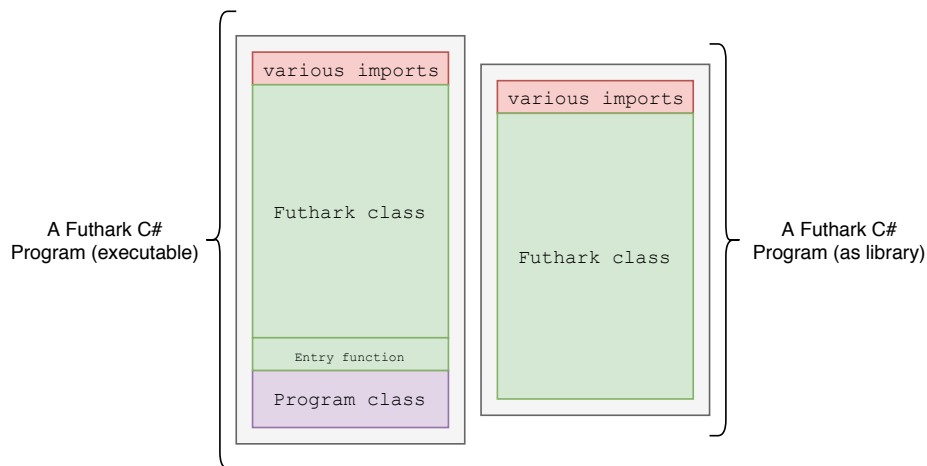


Figure 6.1: The two possible types Futhark C# programs

To be able to use Futhark with F# programs, it was necessary to compile Futhark programs to a language that F# could work with. Although the difference between running a compiled Futhark C- and C# executable from the command line is negligible, a Futhark C# backend would allow .NET projects to use Futhark libraries natively, instead of running their Futhark calculations through separate C or Python modules.

Because F# has almost frictionless interoperability with C#, and C#'s imperative constructs are very close to the intermediate code that Futhark generates for its code generation, it was an easy decision to implement a C# generating backend for Futhark, to accompany the already existing C- and Python backends.

A Futhark backend must be able to do two different programs from a given Futhark program:

First, it must be able to generate standalone executables which can take input data from the `stdin` stream, and send the results to the `stdout` stream. Although a Futhark C,

-Python or C# executable should have equivalent functionality, their performance may vary, and the users may alter between the versions depending on which platforms that are available on their systems.

Second, and more interesting, it must be able to generate single file libraries which can then be imported and used in other C, Python or C# projects, in the same manner as any other library.

---

```
let main (xs : []i32) : []i32 = map (+2) xs
```

---

Figure 6.2: A very small Futhark program `map2.fut`

In example, if we compile the Futhark program in figure 6.2 as a Python library, we will be able to use it in a Python program, as showed in figure 6.3. Likewise, we would like to be able to do the same thing in a C# or an F# context.

---

```
import numpy as np
from map2 import map2

xs = np.array([1,2,3])
map2object = map2()
xs_res = map2object.map2(xs)
print xs_res # prints [3,4,5]
```

---

Figure 6.3: A very small Python program

## The anatomy of a Futhark C# program

In figure 6.1, we see the two different ways we can compile a Futhark program to C#. They're largely the same, except for that the executable Futhark program must have a `Program` class with a `Main` method defined, so that there is an entrypoint defined for the compiled executable. Furthermore, the Futhark class in the executable version contains an entry function which chooses what Futhark function to run (in cases where the Futhark program has more than one entry function defined.)

The `Program` class itself (as seen in figure 6.4) is not especially interesting, and does only contain a `main` method which initialises the Futhark class, and calls the entry function inside the Futhark class. For both Futhark programs, the top consists of the various imports needed for the program.

This leaves us with the Futhark class itself. Figure 6.5 shows the different parts that make up the generated Futhark C# class. In the following sections we will walk through the individual parts.



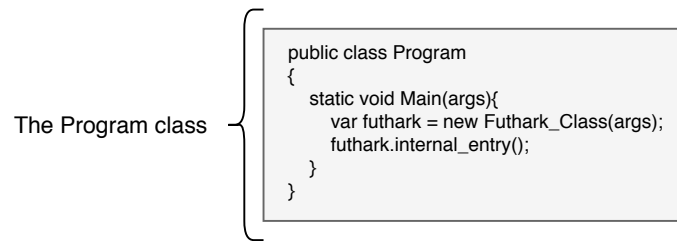


Figure 6.4: The FShark compilation pipeline

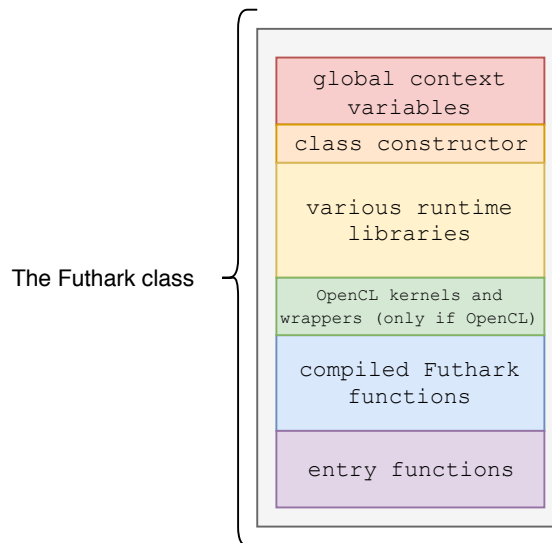


Figure 6.5: The layout of the C# Futhark class

## Global context variables

Compiled Futhark programs need to keep track of several variables. Both normal and OpenCL-enabled Futhark C# programs can take several options when they're launched from the command line. In example, `num_runs` tells the Futhark runtime how many times the chosen entry function should be executed, and the variable `runtime_file` tells the Futhark runtime where it should write timing information to, for example for benchmarking purposes.

Instead of passing an argument array along throughout all the functions in the Futhark class, like we usually would if we were writing purely functional programs, we instead set these arguments as class variables at class initialization, so we can refer to them everywhere throughout the rest of the class.

For non-OpenCL programs, the variables are exclusively for benchmarking and debugging purposes. For OpenCL programs however, the global variables are vital for the program's execution. In an OpenCL program, the Futhark class must keep track of two extra variables.

The struct `futhark_context ctx` is the struct that contains the global state of

the current program's execution. Contained in the global state there is the current list of unused but allocated OpenCL buffers on the device, kernel handles for all the OpenCL kernels used in the Futhark program, and a counter for the total running time of the program. There is even another context contained in the `futhark_context`, namely the `opencl_context`, which contains the current state of the device, and also information about its platform, its queue and so forth.

The struct `futhark_context_config cfg` is similar to the `futhark_context`, but is only used for constructing the actual `futhark_context`.

## The class constructor

The class constructor is necessary to setup the global variables needed throughout the Futhark class. When the Futhark program is compiled as an executable, the command line arguments are passed to the class constructor by the `Program` class. If the Futhark program is compiled as a library, the programmer can pass a string array of arguments to this constructor manually.

Besides setting class variables, OpenCL-enabled versions will initialize (and set) first the `futhark_context_config cfg` variable, and afterwards the `futhark_context` itself.

## The various runtime libraries

The runtime libraries are a set of separate C# files that are written and distributed through the Futhark compiler. When a Futhark program is compiled, these library files are concatenated and embedded directly into the rest of the generated code. They contain functionality which the generated Futhark programs depend on. The runtime libraries are the following:

### **memory.cs**

As Futhark's stores all array values (no matter the dimensionality) as a flat one-dimensional byte arrays (with an accompanying array of 64-integers which denote the dimensions of the flat array), it was necessary to define a set of functions to interact with these byte arrays. I.e., `memory.cs` contains the `writeScalarArray` functions, which writes a scalar value to a byte array. The function is overloaded so it works with scalars of any integer or floating point primitive. See figure 6.6 for an example:

### **scalar.cs**

This library contains all the scalar functions necessary for Futhark C# programs. In Futhark, arithmetic operators are defined for integers and floats of all sizes, and bitwise operators are defined for all integers. However, this is not the case in C#, where many arithmetic operators are only defined for 32- and 64 bit integers.

If these operators are used with 8- or 16 bit operands, the operands are implicitly casted to 32 bit integers at compile time, which also means that the final result of the operation is a 32 bit integer, which doesn't have the right type.

Therefore, wrapper functions must be defined for even the simplest arithmetic functions. I.e., integer addition in C# Futhark is actually four different functions:

---

```

void writeScalarArray(byte[] dest, int offset, double value)
{
    unsafe
    {
        fixed (byte* dest_ptr = &dest[offset])
        {
            *(double*) dest_ptr = value;
        }
    }
}

```

---

Figure 6.6: `writeScalarArray` writes a value at the specified offset in some byte array.

---

```

static sbyte add8(sbyte x, sbyte y){ return Convert.ToSByte(x + y); }
static short add16(short x, short y){ return Convert.ToInt16(x + y); }
static int add32(int x, int y){ return x + y; }
static long add64(long x, long y){ return x + y; }

```

---

Besides, `scalar.cs` also contains the C# definitions for the various mathematical functions from Futhark's `math.futlibrary`, such as `exp`, `sin` and `cos`.

#### **reader.cs**

The reader contains the entire functionality for receiving function parameters through `stdin`. The reader reads scalars of any of the Futhark-supported primitives, and also arrays and multidimensional arrays of scalars. The reader also supports reading streams of binary data. It is only necessary for Futhark executables.

#### **opengl.cs**

MAYBE WRITE ALL OF THIS ALSO? ALRIGHT THANKS

## **The compiled Futhark functions**

The compiled Futhark functions are the Futhark Intermediate Code functions, expressed in the target language, and corresponds to the entry functions found in the entry functions-section of the Futhark class. Only the Futhark `entry` functions are compiled to individual functions, and remaining helper functions are inlined here.

In OpenCL programs, all array functions and SOAC calls are compiled as individual (or fused) OpenCL kernels. Therefore, the compiled Futhark functions in these programs consists of mainly some scalar operations and memory allocations, and calls to Futhark-generated kernel wrapper functions.

In non-OpenCL programs, the array functions and SOAC calls are not stored in separate wrapper functions, but inlined in the Futhark functions.

## OpenCL kernels and wrappers

If the Futhark program is compiled for OpenCL, all array handling function- and SOAC calls are compiled as OpenCL kernels. This part of the Futhark class has two parts:

1. The string (actually a single string in an array) `opencl_prog`, which contains the entire Futhark-generated OpenCL source code for the Futhark program in question. This source code contains all the OpenCL kernels for the program, and is passed to the OpenCL device, compiled and loaded, when the Futhark class is initialized. Handles to the individual kernels are then stored in the `futhark_context`.
2. For each kernel in the `opencl_prog`, the Futhark compiler generates a kernel wrapper function. These wrapper functions takes the kernel arguments (such as scalar values, array values and indexes) as input, and performs all the OpenCL specific work necessary for the actual kernel launch; in example setting the kernel arguments on the device, and copying data back and forth between host and device buffers.

## Entry functions

Futhark’s internal representation of array values are one dimensional byte arrays (which can represent arrays of any type and dimensionality), and an accompanying list of integers denoting the lengths of the array’s dimensions. However, Futhark does not expect it’s users to pass this form of arrays as function arguments, which is why each Futhark `entry` function has a corresponding entry function in the final compiled code.

To discern between Futhark functions and entry functions, the Futhark function’s name is prefixed with “`futhark_`”, as in for example “`futhark_foo`”. Depending on whether the Futhark program is compiled as an executable or a library, the entry function itself is then named “`entry_foo`” or just “`foo`”.

For executables, “`entry_foo`” is a function that doesn’t take any arguments. Instead, it uses the reader functions from `reader.cs` to parse the arguments for “`foo`” from `stdin`, and passes them to the Futhark function. For all array values in the arguments, the array values are converted into Futhark representations of them. When the Futhark function returns the result, the result is then printed to `stdout`.

For libraries, the “`entry_`” prefix is dropped, and the function just takes care of converting array arguments into and back-from their Futhark representations.

## The C# backend, compared to the C- and Python counterparts

THE PYTHON BACKEND HAS MUCH FUNCTIONALITY ENCAPSULATED IN PYOPENCL, AND DOESN'T NEED TO DECLARE VARIABLES BEFORE SETTING THEM LESS COMPLEX GENERATOR NEEDED AS VARIOUS OPENCL STATEMENTS ARE HANDLED AUTOMATICALLY BY LIBRARY

C BACKEND MUST BE AWARE OF ALL SIZES AND EVERYTHING AT COMPILE TIME, WHICH MEANS STATES MUST BE ALLOCATED THROUGH COMPLEX STRUCTS AT COMPILE TIME, AND STRUCTS MUST BE DEFINED AT COMPILE TIME AS WELL

C ALLOWS NULL POINTERS, CS DOES NOT WHICH MEANS WE NEED PLACEHOLDER VARIABLES

CSHARP GENERATOR IS SOMEWHERE INBETWEEN AS IT IS CAN HANDLE OBJECTS WHICH CAN CARRY STATE, FURTHERMORE DYNAMIC MEMORY ALLOCATION

## Memory management in Futhark C#

As Futhark stores array values around in byte arrays, it is relevant to compare the difference between how the array handling differs between Futhark's C backend, and this C# backend. For OpenCL programs, the memory management of C# and C is largely the same, as the OpenCL side of these programs are the same. C# does after all just use C bindings for its OpenCL interactions.

However, for non-OpenCL C# programs, we have to take C#'s memory model into consideration

C implicitly allows unsafe programming. In this case, it means interacting with system memory by reading and writing arbitrary values from/to arbitrary locations, designating the values and destinations as whatever type we want. In figure 6.7, we see a `for`-loop that performs a summing scan on an array of integers. On line 6, reading from right to left, we are first creating reference to a location in the byte array `xs_mem_4223`. However, as the reference is a pointer to a byte in the array, we must recast it as an `int32_t` pointer. After we do this, we can finally derefer the pointer to retrieve a four byte integer from the byte array.

We add the retrieved integer to our accumulating variable `scanacc_4187`, before we cast a reference in our destination byte array as an integer pointer, and store the result there.

WHY IS THIS NOT ALLOWED?

DESCRIBE TWO DIFFERENT WAYS OF DOING IT ANYHOW 1) MARSHAL 2) unsafe and fixed

what was chosen and why

---

```

1 memblock mem_4226;
2 memblock_alloc(&mem_4226, bytes_4224);
3 int32_t scanacc_4187 = 0;
4
5 for (int32_t i_4189 = 0; i_4189 < sizze_4135; i_4189++) {
6     int32_t x_4147 = *(int32_t *) &xs_mem_4223[i_4189 * 4];
7
8     scanacc_4187 += x_4147;
9
10    *(int32_t *) &mem_4226[i_4189 * 4] = scanacc_4187;
11 }

```

---

Figure 6.7: A short snippet from a Futhark C program

## The C# / OpenCL interaction

OpenCL interaction is not a part of the .NET standard library, but several libraries do exist for .NET/OpenCL interactions. For this thesis, I researched a selection of these libraries, to determine which one that would fit the best for my purposes. As Futhark depends on being able to interface with the OpenCL platform directly, it was necessary to find an OpenCL library for .NET which had direct bindings to the OpenCL developer library.

The .NET libraries I took into consideration was `NOpenCL`, `OpenCL.NET` and `Cloo`. All three libraries have been designed to aide OpenCL usage in C# programs, by simplifying OpenCL calls behind methods GØR BEDRE.

`NOpenCL` was the first candidate for the C# backend, and had several advantages to the other two: As per February 2018, it had been updated within the last year, and was therefore the least deprecated library. Second, the `NOpenCL` repository on Github contains both unit tests and example programs.

However, `NOpenCL` is also tailored for Windows use, and therefore not a good fit for Futhark, as Futhark is available on both Windows, Linux and Mac OS. Furthermore, the library is not available through the NuGet package manager, and the OpenCL API calls are needlessly complex to work with through the library.

`OpenCL.NET` also has a test suite, is available through NuGet, and is used as the backend for other libraries, such as the F# GPU library `Brahma.FSharp??`.

However, this library hardcoded to work on a in a Windows context, and has not been updated for more than five years.

This leaves us with `Cloo`. `Cloo` is usable on all three platforms, and it is available on NuGet. Furthermore, as opposed to the other two libraries, the `Cloo` library contains a class with static functions that does nothing but passing arguments on to the OpenCL library, using C#'s `DllImport` attribute. It is immediately possible to skip most of `Cloos` features, and just use the library for it's OpenCL bindings.

Even then, `Cloo` has not been updated within the last five years, and probably won't be in the future either.

Given these three candidates, I chose to work with `Cloo`: It was the only one that had the necessary OpenCL bindings readily available, and the only one that was platform agnostic.

### **Writing a custom OpenCL bindings library**

Though `Cloo` is a good fit for Futhark C#, it is also slightly risky to depend on a five year old unmaintained library in a modern project. Therefore, it could be a good idea to write a smaller library similar to `Cloo`, specifically for Futhark - or maybe even just include it with Futhark as one of the C# runtime libraries.

## Chapter 7

# Benchmarks and evaluation

### **FShark generated Futhark compared to original Futhark code**

Appendices show

#### **The LocVolCalib benchmark**

small.in: FShark (openCL) took 211882 microseconds. Average invocation (fshark non openCL) time was 81194767 microseconds. Native took 438929311 microseconds.

medium.in: (Fshark opencl)invokation time was 310833 microseconds Fshark nonopencl Average invocation time was 154141321 ms Native took 900643005 microseconds.

large.in:

fshark sans opencl 2450637053 microseconds Native took 24757874577 microseconds.

for all three datasets

#### **The nbody benchmark**

for all three datasets

#### **Specifications for benchmark**

We have run the benchmarks on a system with these attributes:

- CPU: 4 cores of Intel Core i5-6500 at 3.20GHz



- L1 cache: 128 KiB
- L2 cache: 1024 KiB
- L3 cache: 6144 KiB
- GPU: GeForce GTX 970

Introduction for the two benchmarks LocVolCalib and nbody  
why are they faster in general

## **Chapter 8**

# **Current limitations**

## **Chapter 9**

### **Method**

## **Chapter 10**

### **Related work**

## **Chapter 11**

# **Conclusion and future work**

## Chapter 12

# Array handling in FShark

F# is a functional programming language on top of the .NET framework, which means that its primitive types like `int`, `float` and `list` all correspond to already existing classes in the .NET framework. In example, F#'s `int` is an alias for .NET's `System.Int32` and `float` is an alias for `System.Double`.

Therefore, we also find corresponding .NET classes for both F# lists and arrays. Lists are `FSharp.Collections.FSharpList`s, and arrays are `System.Array`. (Note that `FSharpList` is available from any .NET framework language, as long as the corresponding assembly is referenced).

Although it is common to use lists in functional programs, the F# subset covered by FShark does not include lists – In Futhark, and therefore also FShark, our main goal is not handling list elements one after another, but rather parallelizing computations across entire arrays of data simultaneously.

The `FSharp.Collections.FSharpList` is implemented as a singly-linked list. SOACs called on singly-linked lists are inherently unparallelizable, as the SOACs must traverse the list sequentially. In example, calling `map f` on a singly linked list  $(x : xs)$  means computing  $f x$  and inserting the result into `map f xs` recursively. We can do some parallel computations for these kinds of SOACs, i.e. by making the main thread traverse the list and spawn a thread for each element computation. However we will still have suboptimal memory access performance, as the elements in the singly linked list doesn't have any guarantees regarding their location in RAM, which means we are going to perform many more memory loads compared to if we were performing calculations on elements in a sequentially stored array elements in RAM.

## Chapter 13

# FSharks interoperability between F# and Futhark (C#)

FShark stands on three legs: The FShark compiler, the Futhark C# code generator, and the FSharkWrapper. The compiler is responsible for compiling FShark source code into Futhark source code, and the C# code generator takes the result Futhark source code, and compiles OpenCL powered C# libraries, which can be imported directly back into F#.

It is of course possible to use the compiler and the code generator as individual modules, but for this project, the FSharkWrapper has been designed to let users use FShark without having to understand any of the underlying pipeline.

To illustrate this; take a look at figure ???. In the first line, the user initializes the FSharkWrapper with the arguments necessary to use the wrapper itself. In the second line, the user adds a source file to the wrapper by its path. In the third line, the user tells the wrapper to run the compilation pipeline. Assuming that the compilation goes well, the user can then invoke some function from the FShark program in line four.

Here, calling the `CompileAndLoad()` function triggers the entire FShark pipeline as described in ??, and does then have a function available for the user to call afterwards.

However, as this is the default way of using FShark, we are currently calling `CompileAndLoad()` every time we use the FShark program. This is happening even though we only need the final compiled C# assembly to load back into F# at run-time.

Everytime we run the FShark compiler pipeline, we are therefore also

1. parsing, typechecking and generating a TAST from the FShark code, using FSharp's compiler.
2. generating Futhark source code from the FSharp TAST
3. Writing the Futhark source code to disk
4. running the Futhark compiler and C# code generator on the Futhark source code

5. running the mono C# compiler on the resulting C# source code

For two selected benchmarks we have the following times

### 13.0.1 Pros and cons of the current design

As there are demonstratively great performance gains to be won by only using the compiler part of the FShark pipeline, it is worth discussing whether the rest of the FShark pipeline should remain.

Besides eliminating the entire compilation operation at every FShark execution, a compiler-only approach to the FShark compiler would give us the following advantages:

- **Standalone-modules first:** As the compiler is now only used once, the resulting Futhark assembly is readily importable in any .NET project, as long as the required Mono libraries are also available. This goes not only for the user who just compiled the assembly, but also for any other user who has acquired the necessary Mono libraries. This means that the FShark developer can use and share the FShark assemblies with colleagues and coworkers like any other sharable .NET library, as this is indeed what a compiled Futhark C# library amounts to.

Corollarily; this FShark design would make FShark is useful for generating high-performing .NET libraries. (Although one could write such libraries in Futhark instead of FShark.)

- **Static typing of FShark module:** The current runtime-only approach means that the user must rely on reflection to call FShark functions. In this situation, all modern IDE comforts like autocompletion, and especially static type checking and inference falls away. For the following example , the current design demands that we first wrap our arguments in an `obj array`, before invoking the function `foo`. Furthermore, we must also downcast the result using F#'s downcasting operator `:?>`. Because we are upcasting our arguments to an `obj array`, we can actually pass any (correctly casted) array as an argument to our reflection-invoked function, without triggering any type errors at compile time. The same goes for the downcasted result from the function. We can cast the result as whatever type we like, and not run into any trouble until we finally run the compiled program. However, if we use FShark to generate assemblies instead, we now have all the type information available at compile time. Our compiler will block us from compiling the program by giving us useful type errors. Last but not least, we can remove all the casting operations that are littering the program.

- **Getting rid of, or at least trimming down, the FSharkWrapper:**

However, the current design of FShark also has some advantages that follows automatically from the design.

- **Rapid FShark code development:** Currently, it is recommended that any FShark code for a project is also built as part of the project. By including the FShark file in the original project's source list, we can call the FShark module natively, without running the FShark compiler, to prototype and debug the FShark



code directly in our IDE, before we switch to using the compiled version of the FShark code.

- **En mere**

## 13.1 The future of FShark interoperability

With these considerations in mind, my future work on FSharks interoperability consists of reducing FSharkWrapper in size, so it only takes an FShark source path and a .NET assembly outpath as inputs, and does nothing more than orchestrating the FShark-, the Futhark- and the C#compiler. The current design is too complex, largely from supporting too many superflous features like concatenating multiple sources, and so on.

I will also be researching the optimal way to keeping the FShark module development as close to the rest of the FShark-using project as possible, without

The current design enables direct prototyping, which must of course be kept in later versions of FShark.