Visoka škola strukovnih studija za informacione i komunikacione tehnologije sa sedištem u Beogradu(Visoka ICT škola)

WEB PROGRAMIRANJE PHP2 SAJT 2

Milica Ivančić 144/16

Dokumentacija za sajt:

http://localhost/shopfirst/public/

Table of Contents


D	atabase	5
O	pis funkcionalnosti sajta	6
S	creen shotovi stranica sajta	7
	http://localhost/shopfirst/public/ index strana sajta	7
	http://localhost/shopfirst/public/shopAll deo za prodavnicu	7
	http://localhost/shopfirst/public/singleProduct/41 informacije o proizvodu	8
	http://localhost/shopfirst/public/card dodavanje u korpu	8
	http://localhost/shopfirst/public/congratulatio/19 iyvrsavanje kupovine	9
	http://localhost/shopfirst/public/userCardFinished/2	9
	http://localhost/shopfirst/public/updateformuser/2	. 10
	http://localhost/shopfirst/public/card kreiranje korpe	. 10
	http://localhost/shopfirst/public/loginForm login	. 11
	http://localhost/shopfirst/public/registerForm registracija	. 11
	http://localhost/shopfirst/public/registerForm loša registracija	. 12
	http://localhost/shopfirst/public/adminpanel admin panel	. 12
	http://localhost/shopfirst/public/adminuser useri	. 13
	http://localhost/shopfirst/public/adminuser/create inser user	. 13
	http://localhost/shopfirst/public/adminuser/2/edit update user	. 14
	http://localhost/shopfirst/public/adminproduct proiyvodi	. 14
	http://localhost/shopfirst/public/adminproduct/41/edit update proizvod	. 15
	http://localhost/shopfirst/public/adminproduct/create insert prroizvod	. 15
	http://localhost/shopfirst/public/adminmenu meni	. 16
	http://localhost/shopfirst/public/adminmenu/create insert meni	. 16
	http://localhost/shopfirst/public/adminmenu/1/edit update meni	. 17
K	odovi	. 18
	Routes/web nhn	18

App/Http/Controllers	19
MyStartFrontController	19
AdminController	21
AdminMenuProductController	21
AdminProductController	23
AdminUserController	26
DeleteAjaxProductController	29
FrontEndContoller	29
LoginController	36
SortController	37
App/Http/Middleware	39
ChechRoleMiddleware	39
App/Http/Requests	40
CardRequest	40
MenuRequest	41
ProductsRequest	41
UserRequest	42
UserUpdateRequest	43
App/Models	43
Card	43
Category	46
Meni	47
Offer	48
Product	48
Size	56
User	56
Useractivities	58
Public/jss	59
backToShop.js	59
Createcard.js	59
Delete.js	60
Deletemenu.js	
Deleteproduct.is	62

Re	esources/views/lazouts	. 64
La	yout.blade.php	. 64
	Adminlayout.blade.php	. 64
Re	esources/views/partial	. 64
	bigSail.blade.php	. 64
	futureProducts.blade.php	. 65
	Footer.blade.php	. 65
	Head.blade.php	. 66
	Menu.blade.php	. 67
	Navbar.blade.php	. 68
	ourOffer.blade.php	. 69
Re	esources/views/partial/admin	. 69
	Content.blade.php	. 69
	Futer.blade.php	. 69
	Head.blade.php	. 70
	Navbar.blade.php	. 70
	Table.blade.php	. 71
Resources/views/pages		. 72
	Card.blade.php	. 72
	Congratulation.blade.ppčhp	. 74
	Contact.blade.php	. 75
	Login.blade.php	. 77
	Products.blade.php	. 77
	Registerform.blade.php	. 80
	Singleproduct.blade.php	. 81
	Streetstore.blade.php	. 82
	Updateuser.blade.php	. 84
	Uscecard.blade.php	. 85
Re	esources/views/pages/admin	. 87
	Adminpanel.blade.php	. 87
	Insertmenu.blade.php	. 88
	Insertproduct.blade.php	. 88
	Insertuser.blade.php	. 90

Menu.blade.php	91
Product.blade.php	92
Jpdatemenu.blade.php	93
Jpdateproduct.blade.php	94
Jpdateuser.blade.php	94
Jsers.blade.php	96

Database

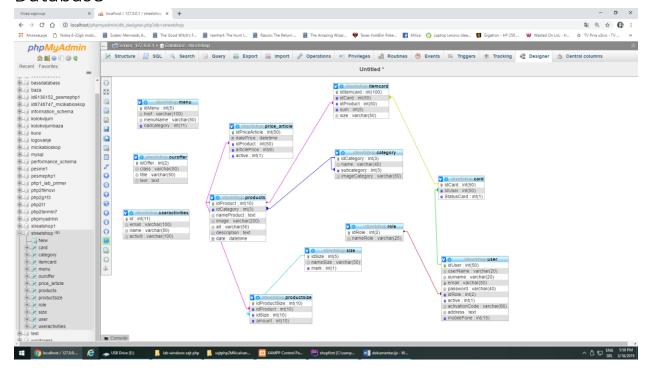

Opis funkcionalnosti sajta


Sajt http://localhost/shopfirst/public/ predstavlja online shoop.

Osnovne funkcije:


- Bilo koji korisnik može
 - da vidi proizvode,
 - o da ih sortira, filtrira po odredjenim uslovima.
 - Da vidi detalje o određenom proizvodu
- Autorizovani korsisnici mogu da
 - o naprave korpu,
 - o dodaju poizvode u postojeću korpu,
 - da bi korisnik dodao proizvod u krorpu mora da odabere veličinu proizvoda, količina je difoltno 1. AKo ne odaberu veličinu proizvoda ispisaće im se poruka da to moraju da odrade
 - o brišu proizvode iz korpe,
 - o menjaju količinu proizvoda u korpi,
 - o izvrše kupovinu. Završetkom kupovine im se zatvara korpa I da bi izvršili novu moraju ponovo da kreiraju korpu.
 - Imaju stranicu ka svom nalogu na kom se iščitavaju svi proizvodi koje su kupili I ukupna cena novca koju su potrošili za sve prozvode koje su kupili.
 - Mogu da menjaju svoj nalog takođe mogu da ugase svoj nalog stavljanjem aktivacije na 0.
- Korisnici se registruju popunjavanjem forme, validacija mejlom nije obezbeđena zbog lose organizacije autora sajta i nedostatka vremena. Korisniku se ispisuju greške ako nije popunio polja odgovarajućim podacima.
- Sve akcije koje vrši korisnik, ili administrator su propraćene porukama o tome da li je akcija bila uspešna ili nije, ako nije zašto nije(negde samo da nije uspešna.)
- Administrator sajta ima poseban layout, ali takođe može da pristupi I korisničkom delu sajta, administrator preko svog korisničkog interfejsa može da
 - Unosi, briše, I menja korisnike
 - Unosi briše I menja navigacioni meni
 - Unosi briše I menja proizvode
 - Ostatak stranica koje administrator mora da menja nisu realizovane zbog istog razloga zbog kog nije realizovana verifikacija preko maila.
 - Takođe administrator ima uvid u aktivnosti korisnika koje se ispisuju u tabeli koja se prikazuje čim administrator pristupi admin panelu. Iznad te tabele je učitana slika autora sajta I osnovne informacije o njemu.
- Svi podaci se iščitavaju iz baze podataka
- Samo administrator može da pristupi delu sajta za administrator, I to je rešeno preko midlleware-a.
- Linkovi u navigacionom meniju se sakrivaju/prikazuju u zavisnosti od uloge korisnika
- Ajaxom se brišu itemi iz korpe, menja se količina itema, brišu proizvodi, I briše meni.Meni I prozvodi se direktno ištitavaju u div a za ostalo je korišćen window.location.

Screen shotovi stranica sajta




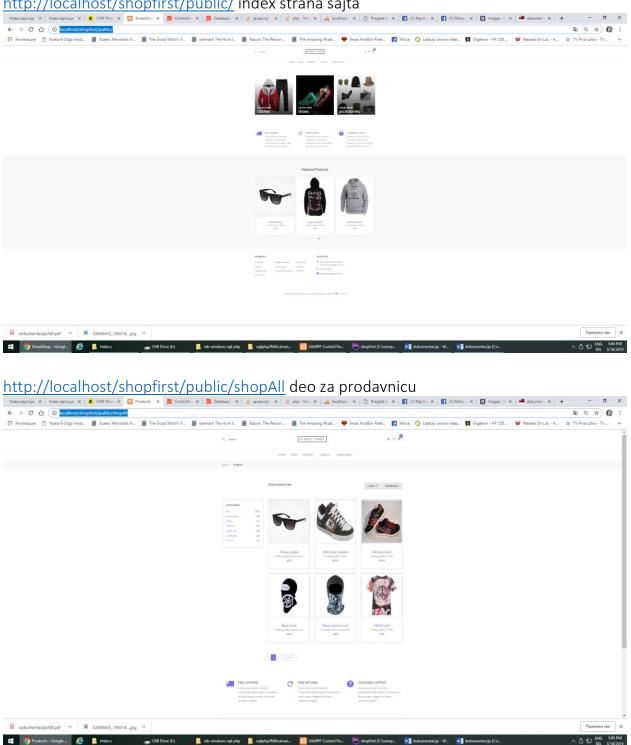


http://localhost/shopfirst/public/singleProduct/41 informacije o proizvodu

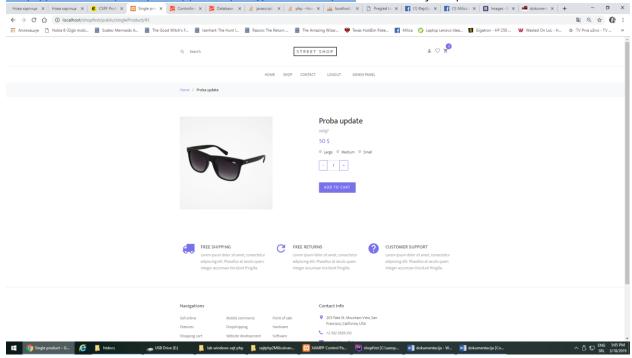


http://localhost/shopfirst/public/card dodavanje u korpu

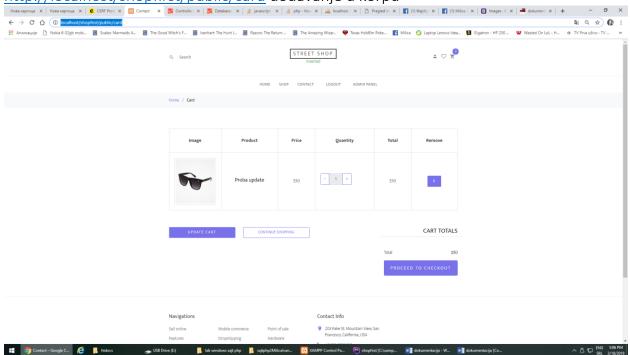


http://localhost/shopfirst/public/congratulatio/19 iyvrsavanje kupovine

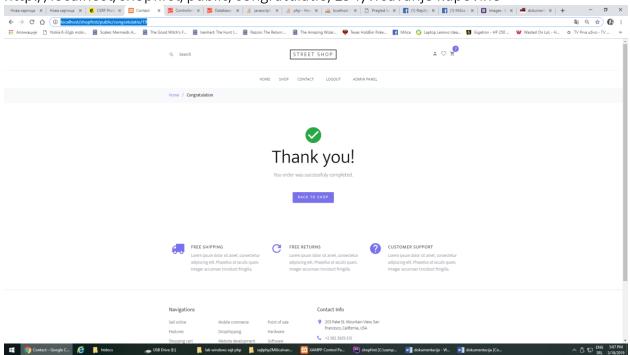


http://localhost/shopfirst/public/userCardFinished/2 proizvodi kojeje korisnik kupio

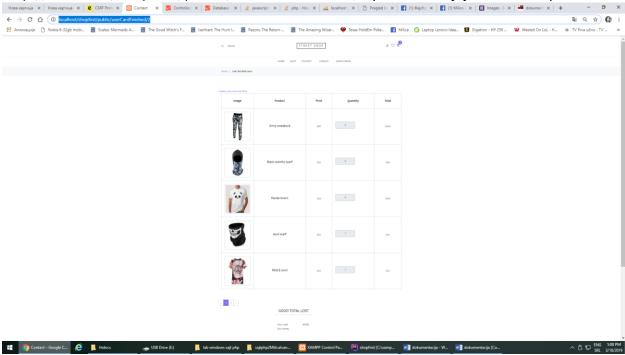


http://localhost/shopfirst/public/updateformuser/2 korisnik menja svoje podatke

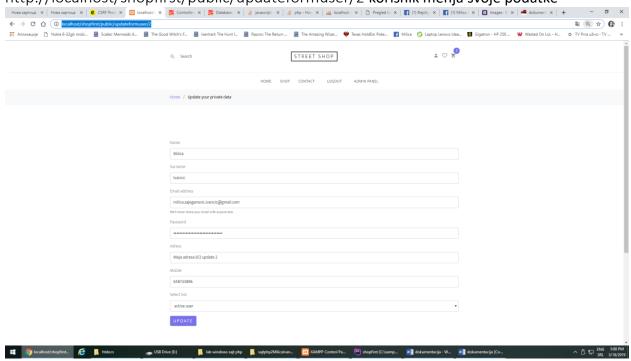

http://localhost/shopfirst/public/card kreiranje korpe

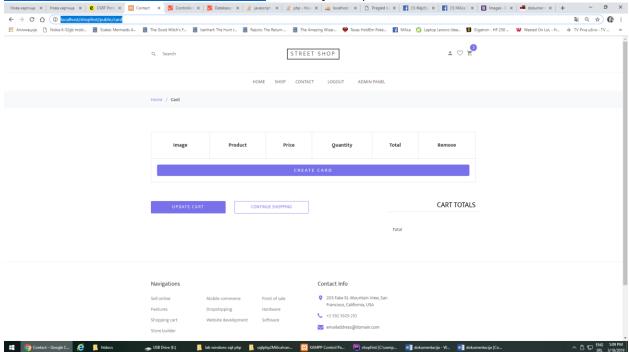

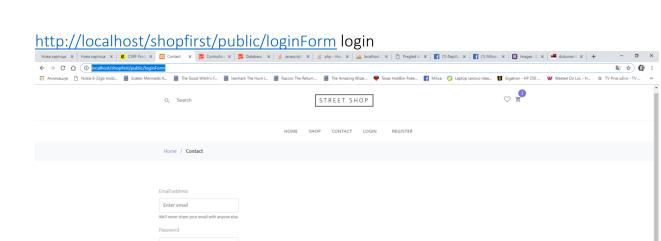



Mobile commerce Point of sale

Dropshipping Hardware

Point of sale

SUBMIT


Navigations

Sell online

Features

Op Contact – Google C...

Shopping cart

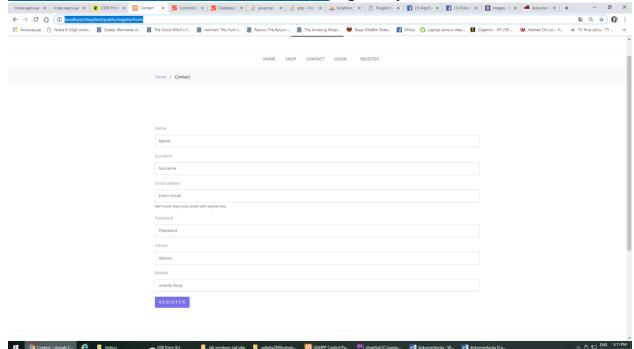

Contact Info


+2 392 3929 210

203 Fake St. Mountain View, San


emailaddress@domain.com

📙 lab windows sajt php 📙 sajtphp2Milicalvan... 🔀 XAMPP Control Pa... 😰 shopfirst [C\xamp... 🔣 dokumentacija · W... 🔞 dokumentacija [Co...


http://localhost/shopfirst/public/registerForm loša registracija

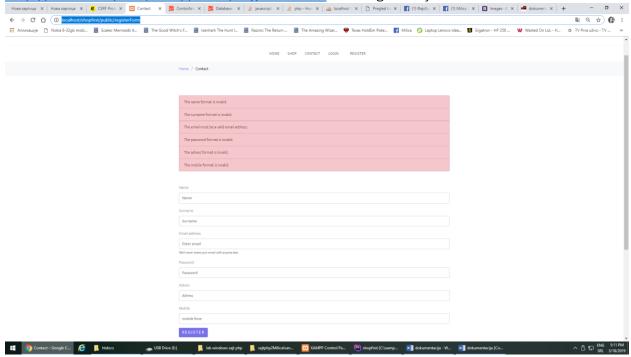


http://localhost/shopfirst/public/adminpanel admin panel

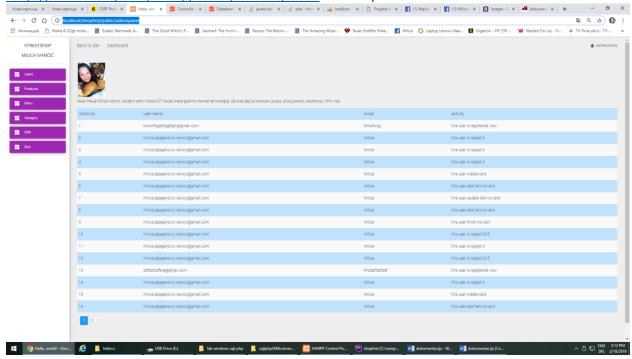


http://localhost/shopfirst/public/adminuser useri

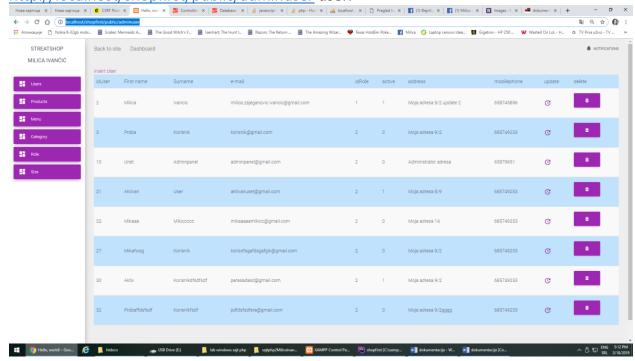


http://localhost/shopfirst/public/adminuser/create inser user

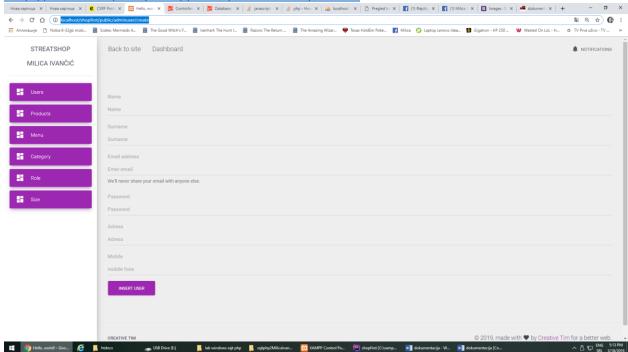


http://localhost/shopfirst/public/adminuser/2/edit update user

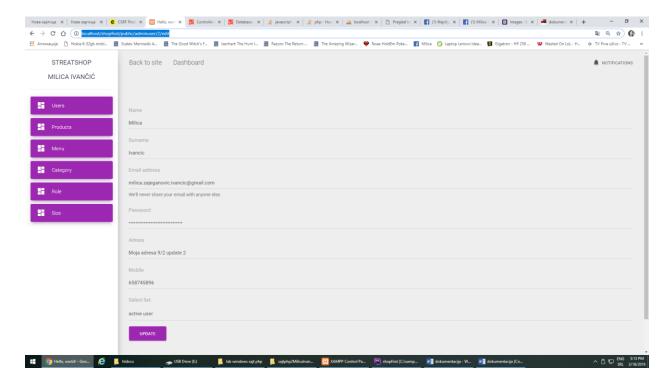


http://localhost/shopfirst/public/adminproduct proiyvodi

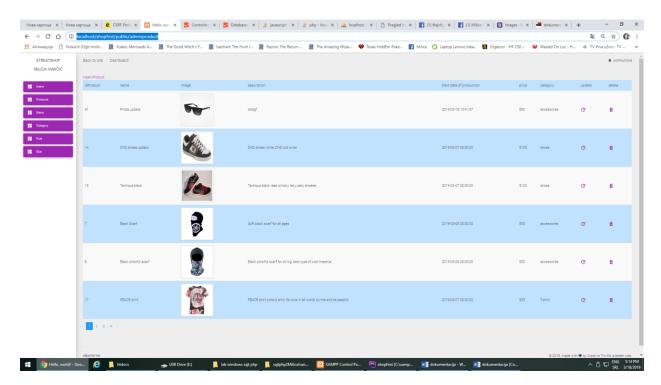


http://localhost/shopfirst/public/adminproduct/41/edit update proizvod

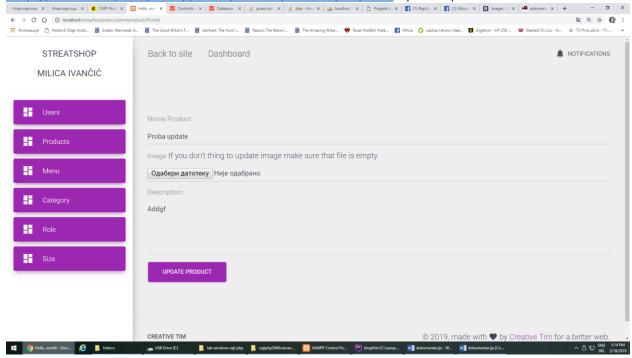


http://localhost/shopfirst/public/adminproduct/create insert prroizvod

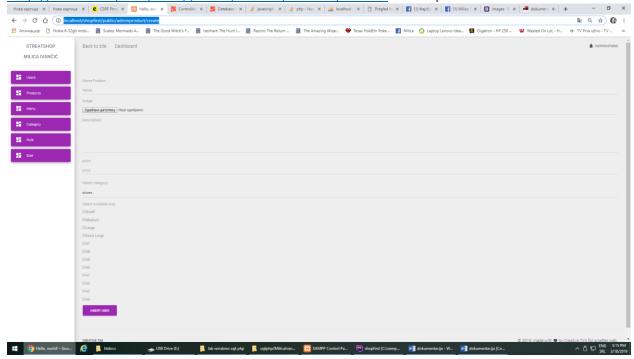


http://localhost/shopfirst/public/adminmenu meni

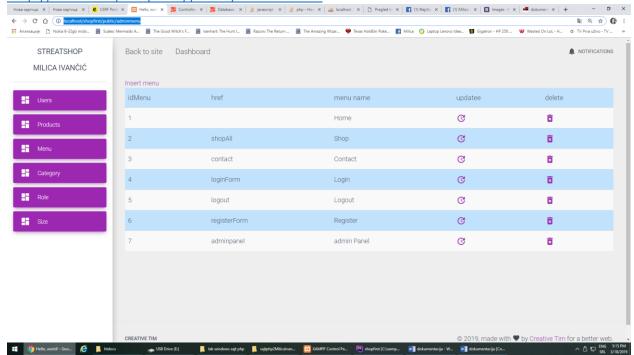

http://localhost/shopfirst/public/adminmenu/create insert meni

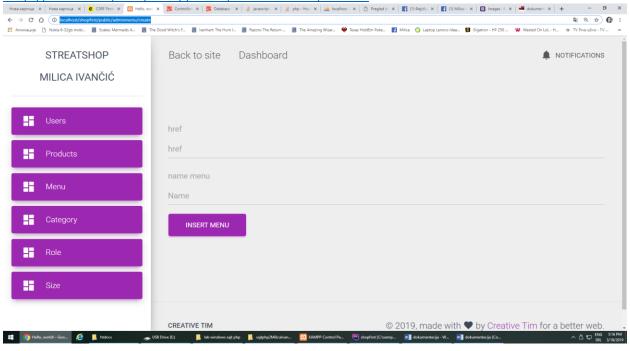

http://localhost/shopfirst/public/adminmenu/1/edit update meni

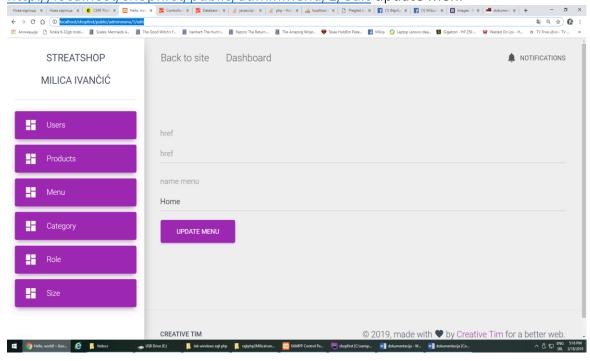

Kodovi

Routes/web.php <?php

```
| Web Routes
| Here is where you can register web routes for your application. These
| routes are loaded by the RouteServiceProvider within a group which
| contains the "web" middleware group. Now create something great!
Route::get('/', function () {
   return view('pages.streetStore');
Route::get('/', "FrontEndContoller@streetStore");
Route::get('/shopAll', "FrontEndContoller@shopAll");
Route::get('/shopClothes', "FrontEndContoller@shopClothes");
Route::get('/shopByCategory/{id}', "FrontEndContoller@shopByCategory");
/// sort controlerr
Route::get('/SortNameAZ/{id?}', "SortController@sortNameAZ");
Route::get('/SortNameZA/{id?}', "SortController@sortNameZA");
Route::get('/SortPriceLow/{id?}', "SortController@SortPriceLow");
Route::get('/SortPriceHight/{id?}', "SortController@SortPriceHight");
Route::get('/singleProduct/{id}', "FrontEndContoller@singleProduct");
////card
Route::get('/card', "FrontEndContoller@card");
Route::get('/createCard', "FrontEndContoller@createCard");
Route::post('/addToCard/{id}', "FrontEndContoller@addToCard");
Route::get('/updateCardItem/{id}', "FrontEndContoller@updateCardItem");
Route::get('/loverSum/{id}', "FrontEndContoller@loverSum");
Route::get('/delete/{id}', "FrontEndContoller@delete");
Route::get('/congratulatio/{id}', "FrontEndContoller@finishCard");
Route::get('/userCardFinished/{id}', "FrontEndContoller@userCardFinished");
Route::put('/updatemyaccount/{id}', "FrontEndContoller@updatemyaccount") -
>name('updatemyacc');
Route::get('/updateformuser/{id}', "FrontEndContoller@form");
Route::get('/contact', "FrontEndContoller@contact");
/** Login, register, logout */
Route::get('/loginForm', "LoginController@LoginForm");
Route::post('/login', "LoginController@login") ->name('login');
Route::get('/logout', "LoginController@logout") ->name('logout');
Route::get('/registerForm', "LoginController@registerform");
Route::post('/register', "LoginController@register") ->name('r');
```

Route::get('/SortPriceLow/{id?}', "SortController@SortPriceLow");

```
Route::get('/SortPriceHight/{id?}', "SortController@SortPriceHight");
//admin
Route::group(['middleware' => 'admin'], function() {
   Route::get('/adminpanel', 'AdminController@index');
   Route::get('/adminproduct/delete/{id}', 'DeleteAjaxProductController@deletAjax');
   Route::resource('/adminuser', 'AdminUserController');
   Route::resource('/adminproduct', 'AdminProductController');
Route::resource('/adminmenu', 'AdminMenuProductController');
});
App/Http/Controllers
MyStartFrontController
<?php
namespace App\Http\Controllers;
use Illuminate\Http\Request;
use App\Models\Meni;
use App\Models\Offer;
class MyStartFrontController extends Controller
    * Display a listing of the resource.
    * @return \Illuminate\Http\Response
protected $data = [];
public function construct() {
$meni = new Meni();
      $this->data['meni'] = $meni->getAll();
      $offer = new Offer();
$this->data['offer'] = $offer->getAll();
}
public function index()
    * Show the form for creating a new resource.
    * @return \Illuminate\Http\Response
   public function create()
```

```
/**
   * Store a newly created resource in storage.
    * @param \Illuminate\Http\Request $request
    * @return \Illuminate\Http\Response
   public function store(Request $request)
   * Display the specified resource.
    * @param int $id
   * @return \Illuminate\Http\Response
   public function show($id)
}
    * Show the form for editing the specified resource.
    * @param int $id
    * @return \Illuminate\Http\Response
   public function edit($id)
   * Update the specified resource in storage.
    * Cparam \Illuminate\Http\Request $request

* Cparam int $id

* Creturn \Illuminate\Http\Response
   public function update(Request $request, $id)
   * Remove the specified resource from storage.
    * @param int $id
    * @return \Illuminate\Http\Response
   public function destroy($id)
```

AdminController

```
<?php
namespace App\Http\Controllers;
use Illuminate\Http\Request;
use App\Models\User;
use App\Models\Useractivities;
class AdminController extends Controller
    * Display a listing of the resource.
    * @return \Illuminate\Http\Response
   protected $admin = [];
   public function index()
           $activiti=new Useractivities();
           $this->admin['activity']=$activiti->userActivity();
return view('pages.admin.adminpanel', $this->admin);
}
}
AdminMenuProductController
<?php
namespace App\Http\Controllers;
use Illuminate\Http\Request;
use App\Models\Meni;
use App\Http\Requests\MenuRequest;
class AdminMenuProductController extends Controller
    * Display a listing of the resource.
     * @return \Illuminate\Http\Response
   protected $admin = [];
 protected $meni;
   public function construct() {
      $this->meni= new Meni();
public function index()
$this->admin['menu']=$this->meni->getAll();
return view('pages.admin.menu', $this->admin);
}
* Show the form for creating a new resource.
```

```
* @return \Illuminate\Http\Response
   public function create()
     return view('pages.admin.insertmenu');
    * Store a newly created resource in storage.
    * @param \Illuminate\Http\Request $request
    * @return \Illuminate\Http\Response
   public function store(MenuRequest $request)
$this->meni->menuname = $request->input('name');
$this->meni->href = $request->input('href');
       try{
           //dd($korisnik);
           $this->meni->insert();
           return redirect("/adminmenu")->with('message','You have successfully added
the meni');
       catch(\Exception $ex) {
           return redirect("/adminmenu") ->with('error', $ex);
           \Log::error($ex->getMessage());
}
    * Display the specified resource.
    * @param int $id
    * @return \Illuminate\Http\Response
   public function show($id)
    * Show the form for editing the specified resource.
    * @param int $id
    * @return \Illuminate\Http\Response
   public function edit($id)
       $this->admin['menu']=$this->meni->shoe($id);
       //dd($this->admin['menu']);
       return view('pages.admin.updatemenu', $this->admin);
}
    * Update the specified resource in storage.
    * @param \Illuminate\Http\Request $request
    * @param int $id
    * @return \Illuminate\Http\Response
```

```
public function update(MenuRequest $request, $id)
       $this->meni->menuname = $request->input('name');
       $this->meni->href = $request->input('href');
       try{
            //dd($korisnik);
            $this->meni->update($id);
            return redirect("/adminmenu")->with('message','You have successfully added
the meni');
        catch(\Exception $ex) {
           return redirect("/adminmenu") ->with('error', $ex);
           \Log::error($ex->getMessage());
      }
}
    ^{\star} Remove the specified resource from storage.
    * @param int $id
     * @return \Illuminate\Http\Response
   public function destroy($id)
       $this->meni->delete($id);
       $this->admin['menu']=$this->meni->getAll();
       return $this->admin['menu'];
  }
AdminProductController
<?php
namespace App\Http\Controllers;
use Illuminate\Http\Request;
use App\Models\Product;
use App\Models\Category;
use App\Models\Size;
use App\Http\Requests\ProductsRequest;
class AdminProductController extends Controller
    * Display a listing of the resource.
     * @return \Illuminate\Http\Response
   protected $admin = [];
```

protected \$product;

public function index()

public function construct(){

\$this->product= new Product();

\$this->admin['products']=\$this->product->getAll();

```
return view('pages.admin.products', $this->admin);
 /**
    * Show the form for creating a new resource.
     * @return \Illuminate\Http\Response
   public function create()
       $size=new Size();
       $category= new Category();
       $this->admin['size']=$size->getAll();
       $this->admin['category']=$category->getAllCategory();
        //dd($this->admin);
       return view('pages.admin.insertproduct', $this->admin);
 /**
    * Store a newly created resource in storage.
    * @param \Illuminate\Http\Request $request
    * @return \Illuminate\Http\Response
   public function store(ProductsRequest $request)
       $this->product->sizearray=$request->input('size');
       $this->product->idCategory=$request->input('category');
      $this->product->description=$request->input('description');
       $this->product->price=$request->input('price');
      $this->product->nameProduct=$request->input('name');
       //$ldate = new DateTime('today');
       //$this->product->date=$ldate;
     //$this->product->datePrice=$ldate;
       // Rad sa fajlovima
       $file = $request->file('image');
        //dd($file);
       $filename = time().$file->getClientOriginalName();
$this->product->pictureFile = $filename;
       if ($file->isValid()) {
           $file->move(public path()."/images/", $filename);
              $this->product->addProduct();
              return redirect()->back()->with('message','Proizvod je uspesno
kreiran.');
            catch(\Exception $ex) {
               return redirect()->back()->with('error','Problem pri unosu u bazu.');
                \Log::error($ex->getMessage());
        } else {
           return redirect()->back()->with('error','Nesto nije u redu sa slikom.');
```

```
}
    * Display the specified resource.
     * @param int $id
     * @return \Illuminate\Http\Response
   public function show($id)
    * Show the form for editing the specified resource.
    * @param int $id
     * @return \Illuminate\Http\Response
   public function edit($id)
       $this->admin['p']=$this->product->getProduct($id);
       //dd($this->admin);
       return view('pages.admin.updateProduct', $this->admin);
   }
    * Update the specified resource in storage.
    * Cparam \Illuminate\Http\Request $request
     * @param int $id
     * @return \Illuminate\Http\Response
   public function update(Request $request, $id)
       $this->product->description=$request->input('description');
        $this->product->nameProduct=$request->input('name');
       $file = $request->file('image');
        //dd($file);
       if ($file) {
            $filename = time().$file->getClientOriginalName();
           $this->product->pictureFile = $filename;
               $file->move(public path()."/images/", $filename);
                try {
                    $this->product->updateProduct($id);
                    return redirect()->back()->with('message', 'Proizvod je uspesno
kreiran.');
                catch(\Exception $ex) {
                   return redirect()->back()->with('error','Problem pri unosu u
bazu.');
                    //return "error baza";
                   \Log::error($ex->getMessage());
               }
             //else {
            // return redirect()->back()->with('error','Nesto nije u redu sa
slikom.');
```

```
//return "error slika";
//}
       }
       else{
         $this->product->updateProductwithoutimg($id);
         return redirect()->back()->with('message','Proizvod je uspesno kreiran.');
}
    * Remove the specified resource from storage.
    * @param int $id
    * @return \Illuminate\Http\Response
   public function destroy($id)
AdminUserController
<?php
namespace App\Http\Controllers;
use Illuminate\Http\Request;
use App\Models\User;
use App\Http\Requests\UserRequest;
use App\Http\Requests\UserUpdateRequest;
class AdminUserController extends Controller
    * Display a listing of the resource.
    * @return \Illuminate\Http\Response
*/
protected $admin = [];
protected $user;
public function construct() {
 $this->user = new User();
}
public function index()
      $this->admin['users']=$this->user->getAll();
      return view('pages.admin.users', $this->admin);
/**
```

```
* Show the form for creating a new resource.
     * @return \Illuminate\Http\Response
   public function create()
      return view('pages.admin.insertuser');
    * Store a newly created resource in storage.
    * @param \Illuminate\Http\Request $request
     * @return \Illuminate\Http\Response
   public function store(UserRequest $request)
       if ($request->has('btnregister')) {
           //dd($request);
           // Prosledjivanje podataka za unos -> kroz polja klase. Drugi nacin: kroz
funkciju insert($naziv, $opis...)
           //$korisnik = new User();
           $this->user->userName = $request->input('name');
           $this->user->surname = $request->input('surname');
           $this->user->email = $request->input('email');
           $this->user->password = $request->input('password');
           $this->user->address = $request->input('adress');
           $this->user->mobilePhone = $request->input('mobile');
           try{
                //dd($korisnik);
               $this->user->Add();
               return redirect("/adminpanel")->with('message','You have successfully
added the user');
           catch(\Exception $ex) {
               return redirect("/adminpanel") ->with('error', $ex);
               \Log::error(\sex->getMessage());
          }
      }
}
    * Display the specified resource.
    * @param int $id
    * @return \Illuminate\Http\Response
   public function show($id)
    * Show the form for editing the specified resource.
     * @param int $id
    * @return \Illuminate\Http\Response
   public function edit($id)
$this->admin['user']=$this->user->getUser($id);
```

```
//dd($this->admin['user']);
       return view('pages.admin.updateUser', $this->admin);
}
    * Update the specified resource in storage.
     * Cparam \Illuminate\Http\Request $request 
* Cparam int $id
     * @return \Illuminate\Http\Response
   public function update(UserUpdateRequest $request, $id)
//dd($request);
           //$korisnik = new User();
        $this->user->userName = $request->input('name');
        $this->user->surname = $request->input('surname');
        $this->user->email = $request->input('email');
           $p= $this->user->password = $request->input('password');
        $this->user->active = $request->input('activ');
        $this->user->address = $request->input('adress');
        $this->user->mobilePhone = $request->input('mobile');
          q=strlen(p);
          //dd($q);
            if($q<32){
                try{
                    //dd($korisnik);
                    $this->user->Updateuser($id);
                    return redirect("/adminuser") ->with('message', 'You have
successfully updated the user');
                catch(\Exception $ex) {
                    return redirect("/adminuser") ->with('error', $ex);
                    \Log::error($ex->getMessage());
            try{
                //dd($korisnik);
                $this->user->UpdateuserWithoutPassword($id);
                return redirect("/adminuser") ->with('message','You have successfully
updated the user');
            catch(\Exception $ex) {
                return redirect("/adminuser") ->with('error', $ex);
                \Log::error($ex->getMessage());
     * Remove the specified resource from storage.
     * @param int $id
     * @return \Illuminate\Http\Response
   public function destroy($id)
       $x=$this->user->deleteUser($id);
        if($x){
           return redirect('/adminuser')->with('message', 'You have successfully
```

```
deleted the user');
 }
return redirect('/adminuser')->with('error', 'Error by deleting user.');
DeleteAjaxProductController
<?php
namespace App\Http\Controllers;
use Illuminate\Http\Request;
use App\Models\Product;
class DeleteAjaxProductController extends Controller
   protected $admin = [];
protected $product;
 public function __construct() {
      $this->product= new Product();
 public function deletAjax($id) {
       $this->product->delete($id);
       $this->admin['products']=$this->product->getAll();
      return $this->admin['products'];
 }
FrontEndContoller
<?php
namespace App\Http\Controllers;
use App\Http\Requests\UserRequest;
use App\Models\User;
use Foo\DataProviderIssue2833\SecondTest;
use Illuminate\Http\Request;
use App\Models\Product;
use App\Models\Category;
use App\Models\Card;
use App\Models\Useractivities;
use App\Http\Requests\CardRequest;
use App\Http\Requests\UserUpdateRequest;
use Psy\Util\Json;
class FrontEndContoller extends MyStartFrontController
   * Display a listing of the resource.
```

```
* @return \Illuminate\Http\Response
//public $userid;
   public function streetStore()
       $product = new Product();
       $category=new Category();
       $this->data['product'] = $product->get5();
     $this->data['collection'] = $category->getAll();
     //dd( $this->data['product']);
      return view('pages.streetStore', $this->data);
 }
   public function card(Request $request)
             if ($request->session()->has('user')){
                 $user = $request->session()->get('user');
                 $id=$user->idUser;
                 $card=new Card();
                 $this->data['exist']=$card->existCard($id);
                 $this->data['user']=$user;
                 if ($this->data['exist']) {
                      $card2=$card->getUsrCard($id);
                     $cardId=$card2->idCard;
                     $this->data['productsexist']=$card-
>cardProductEgzist($cardId);
                     $this->data['products']=$card->cardProduct($cardId);
                     $this->data['totalPrice']=$card->totalPrice($cardId);
                     return view('pages.card', $this->data);
       return view('pages.card', $this->data);
             else{
                 return redirect('/')->with('error', 'If you wanna shop on
our site, crete account or login on your account');
}
}
   public function userCardFinished(Request $request)
        if ($request->session()->has('user')){
           $user = $request->session()->get('user');
           $id=$user->idUser;
           $card=new Card();
           $this->data['exist']=$card->existOrderUser($id);
```

```
//dd($this->data['exist']);
           if ($this->data['exist']) {
                //$card2=$card->getUsrCard($id);
                //$cardId=$card2->idCard;
                //$this->data['productsexist']=$card-
>cardProductEgzist($cardId);
               //$this->data['products']=$card->cardProduct($cardId);
                //$this->data['totalPrice']=$card->totalPrice($cardId);
               $this->data['productsUser']=$card->userOrders($id);
               $this->data['id']=$id;
                //dd($this->data['id']);
               $this->data['totalPriceUserEndCard']=$card-
>totalPriceFinishCard($id);
               return view('pages.usercard', $this->data);
           //dd( $this->data['exist']);
           //return redirect('/card')->with('error', 'You never by somthing,
go to shop and by best product');
          return view('pages.usercard', $this->data);
}
else{
           return redirect('/card')->with('error', 'You need do login to
acess this page');
 }
}
public function addToCard(CardRequest $request,$id ) {
   if ($request->has('btnadTocard')) {
        //dd($request);
         //Prosledjivanje podataka za unos -> kroz polja klase. Drugi nacin:
kroz funkciju insert ($naziv, $opis...)
  $item = new Card();
        $item2 = new Card();
        $user = $request->session()->get('user');
       $idUser=$user->idUser;
        $p=$item->existCard($idUser);
        //dd($p);
       if($p){
            $size = $request->input('size');
            $sum = $request->input('sum');
           $card=$p->idCard;
//dd($card);
    // $card=$item->idCard($idU );
           try{
                //dd($korisnik);
                $item2->addItemTocard($id, $card, $sum, $size);
```

```
$userinsert=$request->session()->get('user');
                $name=$userinsert->userName;
                $email=$userinsert->email;
                $activity="this user add item to card";
                $activiti=new Useractivities();
                $activiti->insert($email, $name, $activity);
                return redirect("/card") ->with('message', 'Inserted');
           catch(\Exception $ex) {
                //dd(\$ex);
                return redirect("/card")->with('error', 'Fail insert');
               \Log::error($ex->getMessage());
       else{
           return redirect('/card')->with('error', 'You need create card');
}
}
public function finishCard(Request $request, $id) {
  $item = new Card();
       $item->finisShop($id);
       $userinsert=$request->session()->get('user');
       $name=$userinsert->userName;
       $email=$userinsert->email;
       $activity="this user finish his cart";
       $activiti=new Useractivities();
       $activiti->insert($email, $name, $activity);
       return view('pages.congratulation', $this->data);
       //return 1;
public function updateCardItem(Request $request, $id) {
           //dd($request);
           // Prosledjivanje podataka za unos -> kroz polja klase. Drugi
nacin: kroz funkciju insert($naziv, $opis...)
            $item = new Card();
           $item->updateItemcard( $id);
       $userinsert=$request->session()->get('user');
       $name=$userinsert->userName;
       $email=$userinsert->email;
       $activity="this user update item to card";
       $activiti=new Useractivities();
       $activiti->insert($email, $name, $activity);
      //return Json($newsum);
```

}

```
public function loverSum($id) {
 $item = new Card();
     $item->loverSum($id);
public function delete($id ) {
//dd($request);
      // Prosledjivanje podataka za unos -> kroz polja klase. Drugi nacin:
kroz funkciju insert($naziv, $opis...)
     $item = new Card();
      $item->delete($id);
  //dd($a);
}
   public function createCard(Request $request)
       if ($request->session()->has('user')){
       $user = $request->session()->get('user');
 $id=$user->idUser;
           $card=new Card();
           $card->createCard($id);
           $userinsert=$request->session()->get('user');
           $name=$userinsert->userName;
           $email=$userinsert->email;
           $activity="this user create card";
           $activiti=new Useractivities();
          $activiti->insert($email, $name, $activity);
           return redirect("/card")->with("message", "You are successfuly
create card");
}
else{
return redirect('/')->with('error', 'If you wanna shop on our
site, crete account or login on your account');
}
}
   public function shopAll(Request $request)
      $request->session()->forget('category');
 $request->session()->push("category", 'all');
//dd(session('category'));
       $product = new Product();
       $this->data['product'] = $product->getAll();
```

```
//dd($this->data['product']);
       $this->data['primaryCategorySub']=$product-
>getPrimaryCategorySubcategory();
        $this->data['prcategory']=$product->getPrimaryCategory();
        $this->data['subcategory']=$product->getSubCategory();
        $this->data['count'] = $product->productCount();
//dd($prc);
      return view('pages.products', $this->data);
// return view('pages.products');
   public function shopClothes(Request $request)
       $request->session()->forget('category');
      $request->session()->push("category", "1");
      $product = new Product();
       $this->data['product'] = $product->getClothesProducts();
       $this->data['primaryCategorySub']=$product-
>getPrimaryCategorySubcategory();
        $this->data['prcategory']=$product->getPrimaryCategory();
        $this->data['subcategory']=$product->getSubCategory();
       $this->data['count'] = $product->productCount();
//dd($prc);
       return view('pages.products', $this->data);
 }
   public function shopByCategory(Request $request,$id)
        $request->session()->forget('category');
       $request->session()->push("category", $id);
  // dd(session('category'));
          $product = new Product();
          $this->data['product'] = $product->getByCategory($id);
//dd($this->data['product']);
          $this->data['primaryCategorySub']=$product-
>getPrimaryCategorySubcategory();
           $this->data['prcategory']=$product->getPrimaryCategory();
          $this->data['subcategory']=$product->getSubCategory();
          $this->data['count'] = $product->productCount();
//dd($this->data['count']);
 return view('pages.products', $this->data);
}
   public function singleProduct($id)
       $product = new Product();
        $this->data['product'] = $product->singleProduct($id);
       $this->data['size'] = $product->size($id);
       //dd($this->data['size']);
       return view("pages.singleProduct", $this->data);
```

```
public function contact()
        return view('pages.contact', $this->data);
   public function updatemyaccount(UserUpdateRequest $request, $id)
        $korisnik = new User();
        $korisnik->userName = $request->input('name');
        $korisnik->surname = $request->input('surname');
        $korisnik->email = $request->input('email');
        $p= $korisnik->password = $request->input('password');
        $korisnik->active = $request->input('activ');
        $korisnik->address = $request->input('adress');
        $korisnik->mobilePhone = $request->input('mobile');
        q=strlen(p);
        //dd($q);
        if($q<32){
            try{
                //dd($korisnik);
                $korisnik->Updateuser($id);
               // dd('a');
                return redirect("/")->with('message','You have successfully
updated your personal data');
            catch(\Exception $ex) {
                return redirect("/")->with('error', $ex);
                \Log::error($ex->getMessage());
        else{
            try{
                //dd($korisnik);
                $korisnik->UpdateuserWithoutPassword($id);
                return redirect("/") ->with('message', 'You have successfully
updated your personal data');
            catch(\Exception $ex) {
                return redirect("/")->with('error', $ex);
                \Log::error($ex->getMessage());
}
   public function form($id)
      $usermy=new User();
      $this->data["user"]=$usermy->getUser($id);
    //dd($this->data['myacc']);
```

}

```
return view('pages.updateuser', $this->data);
}
LoginController
<?php
namespace App\Http\Controllers;
use Illuminate\Http\Request;
use App\Models\User;
use App\Models\Useractivities;
use App\Http\Requests\UserRequest;
use App\Http\Controllers\Controller;
class LoginController extends MyStartFrontController
   public function loginForm () {
       return view('pages.login', $this->data);
public function registerform () {
       return view('pages.registerForm', $this->data);
}
   public function register(UserRequest $request) {
        if ($request->has('btnregister')) {
            //dd($request);
            // Prosledjivanje podataka za unos -> kroz polja klase. Drugi nacin: kroz
funkciju insert ($naziv, $opis...)
            $korisnik = new User();
            $name=$korisnik->userName = $request->input('name');
           $korisnik->surname = $request->input('surname');
            $email=$korisnik->email = $request->input('email');
            $korisnik->password = $request->input('password');
            $korisnik->address = $request->input('adress');
            $korisnik->mobilePhone = $request->input('mobile');
                try{
                    //dd($korisnik);
                    $korisnik->Add();
                    $activity="this user is registered, now";
                    $activiti=new Useractivities();
                    $activiti->insert($email, $name, $activity);
                    return redirect("/")->with('message','Inserted');
                catch(\Exception $ex) {
                    return redirect("/")->with('error', $ex);
                    \Log::error($ex->getMessage());
}
```

```
public function login(Request $request){
        //dd($request);
        if($request->has('login')){
            $email = $request->input('email');
            $password= $request->input('password');
            $korisnik = new User();
            $user = $korisnik->checkUser($email, $password);
            if($user){
                $request->session()->put('user', $user);
                $userinsert=$request->session()->get('user');
                $name=$userinsert->userName;
                $activity="this user is logied in";
                $activiti=new Useractivities();
                $activiti->insert($email, $name, $activity);
                return redirect("/")->with('message', 'You successfully logged in.');
            } else {
                return redirect("/")->with('error', 'You failed to log in.');
      }
   public function logout(Request $request) {
        if ($request->session()->has('user')){
            $userinsert=$request->session()->get('user');
            $name=$userinsert->userName;
            $email=$userinsert->email;
            $activity="this user is logied OUT ";
            $activiti=new Useractivities();
            $activiti->insert($email, $name, $activity);
            $request->session()->forget('user');
           return redirect("/")->with('message', 'You successfully logged out.');
    }
 }
}
SortController
<?php
namespace App\Http\Controllers;
use Illuminate\Http\Request;
use App\Models\Product;
class SortController extends MyStartFrontController
    * Display a listing of the resource.
     * @return \Illuminate\Http\Response
  //private $data = [];
 public function sortNameAZ($id=null)
```

```
$product = new Product();
        if ($id) {
            $this->data['product'] = $product->SortNameAZ($id);
//dd($this->data['product']);
            $this->data['primaryCategorySub']=$product-
>getPrimaryCategorySubcategory();
            $this->data['prcategory']=$product->getPrimaryCategory();
            $this->data['subcategory']=$product->getSubCategory();
            $this->data['count'] = $product->productCount();
//dd($this->data['count']);
            return view('pages.products', $this->data);
        else{
            $this->data['product'] = $product->SortNameAZAll();
//dd($this->data['product']);
            $this->data['primaryCategorySub']=$product-
>getPrimaryCategorySubcategory();
            $this->data['prcategory']=$product->getPrimaryCategory();
            $this->data['subcategory']=$product->getSubCategory();
            $this->data['count'] = $product->productCount();
//dd($this->data['count']);
            return view('pages.products', $this->data);
}
   public function sortNameZA($id=null)
        $product = new Product();
        if ($id) {
            $this->data['product'] = $product->SortNameZA($id);
//dd($this->data['product']);
            $this->data['primaryCategorySub']=$product-
>getPrimaryCategorySubcategory();
            $this->data['prcategory']=$product->getPrimaryCategory();
            $this->data['subcategory']=$product->getSubCategory();
            $this->data['count'] = $product->productCount();
//dd($this->data['count']);
            return view('pages.products', $this->data);
        else{
            $this->data['product'] = $product->SortNameZAAll();
//dd($this->data['product']);
            $this->data['primaryCategorySub']=$product-
>getPrimaryCategorySubcategory();
            $this->data['prcategory']=$product->getPrimaryCategory();
            $this->data['subcategory']=$product->getSubCategory();
            $this->data['count'] = $product->productCount();
//dd($this->data['count']);
            return view('pages.products', $this->data);
   public function SortPriceLow($id=null)
        $product = new Product();
        if($id){
            $this->data['product'] = $product->SortPriceLow($id);
            $this->data['primaryCategorySub']=$product-
>getPrimaryCategorySubcategory();
```

```
$this->data['prcategory']=$product->getPrimaryCategory();
            $this->data['subcategory']=$product->getSubCategory();
            $this->data['count'] = $product->productCount();
            return view('pages.products', $this->data);
        else{
            $this->data['product'] = $product->SortPriceLowAll();
            $this->data['primaryCategorySub']=$product-
>getPrimaryCategorySubcategory();
            $this->data['prcategory']=$product->getPrimaryCategory();
            $this->data['subcategory']=$product->getSubCategory();
            $this->data['count'] = $product->productCount();
            return view('pages.products', $this->data);
   public function SortPriceHight($id=null)
        $product = new Product();
        if ($id) {
            $this->data['product'] = $product->SortPriceHight($id);
            $this->data['primaryCategorySub']=$product-
>getPrimaryCategorySubcategory();
            $this->data['prcategory']=$product->getPrimaryCategory();
            $this->data['subcategory']=$product->getSubCategory();
            $this->data['count'] = $product->productCount();
            return view('pages.products', $this->data);
        else{
           $this->data['product'] = $product->SortPriceHightAll();
          $this->data['primaryCategorySub']=$product-
>getPrimaryCategorySubcategory();
            $this->data['prcategory']=$product->getPrimaryCategory();
            $this->data['subcategory']=$product->getSubCategory();
            $this->data['count'] = $product->productCount();
            return view('pages.products', $this->data);
      }
}
App/Http/Middleware
ChechRoleMiddleware
<?php
namespace App\Http\Middleware;
use Closure;
class ChechRoleMiddleware
    * Handle an incoming request.
```

```
* @param \Illuminate\Http\Request $request
    * @param \Closure $next
    * @return mixed
   public function handle($request, Closure $next)
if($request->session()->has('user')){
           //dd($request->session()->get('user'));
           $user = $request->session()->get('user');
           if ($user->nameRole == 'admin') {
               return $next($request);
           } else {
               return redirect('/')->with('error','You do not have the right to
access this page!');
          }
 return redirect('/')->with('error','You do not have the right to access this
page');
}
```

App/Http/Requests

CardRequest

```
<?php
* Created by PhpStorm.
* User: Milica
* Date: 3/13/2019
* Time: 10:50 PM
namespace App\Http\Requests;
use Illuminate\Foundation\Http\FormRequest;
class CardRequest extends FormRequest
   public function authorize()
       return true;
    * Get the validation rules that apply to the request.
     * @return array
   public function rules()
       return [
           'size' => 'required',
            'sum' => 'required'
      ];
 }
```

```
MenuRequest
<?php
namespace App\Http\Requests;
use Illuminate\Foundation\Http\FormRequest;
class MenuRequest extends FormRequest
    * Determine if the user is authorized to make this request.
    * @return bool
   public function authorize()
    return true;
    * Get the validation rules that apply to the request.
    * @return array
   public function rules()
       return [
            'href' =>"required",
           'name' =>"required"
      ];
 }
ProductsRequest
<?php
namespace App\Http\Requests;
use Illuminate\Foundation\Http\FormRequest;
class ProductsRequest extends FormRequest
    * Determine if the user is authorized to make this request.
     * @return bool
   public function authorize()
      return true;
}
    * Get the validation rules that apply to the request.
    * @return array
   public function rules()
```

```
return [
           'name'=>'required',
           'category'=>'required',
           'size'=>'required',
           'description'=>'required',
           'price'=>'required',
           "image" => "required|mimes:jpg,jpeg,gif,png|max:3000"
] ;
}
UserRequest
<?php
namespace App\Http\Requests;
use Illuminate\Foundation\Http\FormRequest;
class UserRequest extends FormRequest
    * Determine if the user is authorized to make this request.
    * @return bool
   public function authorize()
    return true;
}
    * Get the validation rules that apply to the request.
    * @return array
   public function rules()
       return [
           'name' => 'Regex:/^[A-Z][\D]+$/i|max:100',
           'surname' => 'Regex:/^[A-Z][\D]+$/i|max:100',
           'email' => 'email',
           'password' => 'Regex:/^(.){6,}$/',
           'adress' => 'Regex:/^[A-Z][a-zA-Z0-9\/\s]{10,}$/',
           'mobile' => 'Regex:/^[0-9]{9,15}$/'
] ;
//public function messages()
      // return [
           //"required" => "Polje :attribute je obavezno."
       //return parent::messages(); // TODO: Change the autogenerated stub
```

UserUpdateRequest

```
<?php
* Created by PhpStorm.
* User: Milica
* Date: 3/15/2019
* Time: 6:28 PM
namespace App\Http\Requests;
use Illuminate\Foundation\Http\FormRequest;
class UserUpdateRequest extends FormRequest
    public function authorize()
       return true;
}
    * Get the validation rules that apply to the request.
     * @return array
    public function rules()
        return [
            'name' => 'Regex:/^[A-Z][\D]+$/i|max:100',
            'surname' => 'Regex:/^[A-Z][\D]+$/i|max:100',
            'email' => 'email',
            'password' => 'Regex:/^(.){6,}$/',
            'active' => 'Regex:/^[0-1]$/',
            'adress' => 'Regex:/^[A-Z][a-zA-Z0-9\/\s]{10,}$/',
'mobile' => 'Regex:/^[0-9]{9,15}$/'
] ;
}
App/Models
Card
<?php
* Created by PhpStorm.
```

class Card //extends Model

//use Illuminate\Database\Eloquent\Model;

namespace App\Models;

* User: Milica * Date: 3/13/2019 * Time: 6:49 PM

```
{
public $sum;
public function getSum($id) {
    \DB::table('itemcard')
        ->select('sum')
        ->where('idItemcard', $id)
        ->first();
public function existCard($id) {
return \DB::table('card')
    ->where([
    ['idUser', '=', $id],
    ['StatusCard', '=', 0]
            ])
->first();
}
    public function idCard($id) {
        return \DB::table('card')
            ->select('idCard')
            ->where([
                 ['idUser', '=', $id],
                 ['StatusCard', '=', 0]
            ->first();
    public function createCard($id) {
       return \DB::table('card')
       ->insert(['idUser' => $id]);
    public function cardProductEgzist($id) {
        return \DB::table('card')
            ->join('itemcard AS i' , 'i.idCard', '=', 'card.idCard')
            ->where('card.idCard', '=', $id)
          ->first();
}
    public function cardProduct($id) {
        return \DB::table('card')
            ->select('p.image', 'p.alt', 'p.idProduct', 'p.nameProduct',
'a.articlePrice', 'i.idCard' , 'i.idItemcard', 'i.sum')
            //->groupBy('p.image', 'p.alt', 'p.idProduct', 'p.nameProduct',
'a.articlePrice', 'i.idCard', 'i.idItemcard', 'i.sum')
            ->join('itemcard AS i' , 'i.idCard', '=', 'card.idCard')
->join('products AS p' , 'p.idProduct', '=', 'i.idProduct')
            -> join("price_article AS a" , "a.idProduct" , "=", "p.idProduct")
->where([['card.idCard', '=', $id],
                 ['a.active', '=', 1]])
            ->get();
    public function totalPrice($id) {
        return \DB::table('card')
            ->select(\DB::raw('SUM(a.articlePrice * i.sum) as total price'))
            //->groupBy('p.image', 'p.alt', 'p.idProduct', 'p.nameProduct',
'a.articlePrice', 'i.idCard' , 'i.idItemcard', 'i.sum')
->join('itemcard AS i' , 'i.idCard', '=', 'card.idCard')
```

```
->join('products AS p' , 'p.idProduct', '=', 'i.idProduct')
            -> join("price_article AS a" , "a.idProduct" , "=", "p.idProduct")
            ->where([['card.idCard', '=', $id],
                ['a.active', '=', 1]])
           ->first();
   public function getUsrCard($id) {
        return \DB::table('card')
            ->where([
               ['idUser', '=', $id],
                ['StatusCard', '=', 0]
            ])
           ->first();
  }
   public function addItemTocard($id, $card, $sum, $size) {
        try{\DB::table('itemcard')
            ->insert([
                'idProduct' => $id,
                'idCard'=>$card,
                'sum' => $sum,
                'size' => $size
       ]);
       catch(\Throwable $e) {
        \Log::critical("Failed add to card.");
       throw new \Exception($e);
} }
public function updateItemcard($id) {
    return \DB::table('itemcard')
       ->where('idItemcard', $id)
       ->update([
            'sum' => \DB::raw('sum+1')
  ]);
}
   public function loverSum($id) {
        return \DB::table('itemcard')
           ->where('idItemcard', $id)
            ->update([
                'sum' => \DB::raw('sum-1')
          ]);
   public function delete($id) {
       return \DB::table('itemcard')
           ->where('idItemcard', $id)
           ->delete();
}
   public function findSum($id){
        return \DB::table('itemcard')
           ->where('idProduct', $id)
           ->first();
public function finisShop($id) {
       return \DB::table('card')
           ->where('idCard', $id)
           ->update(['StatusCard' => 1]);
```

```
}
 public function userOrders($id) {
     return \DB::table('card')
             ->select('p.image', 'p.alt', 'p.idProduct', 'p.nameProduct',
'a.articlePrice', 'i.idCard' , 'i.idItemcard', 'i.sum')
//->groupBy('p.image', 'p.alt', 'p.idProduct', 'p.nameProduct',
'a.articlePrice', 'i.idCard', 'i.idItemcard', 'i.sum')
             ->join('itemcard AS i' , 'i.idCard', '=', 'card.idCard')
->join('products AS p' , 'p.idProduct', '=', 'i.idProduct')
             -> join("price_article AS a" , "a.idProduct" , "=", "p.idProduct")
             ->where([['card.idUser', '=', $id],
                  ['StatusCard', '=', 1]])
             ->paginate(5);
}
    public function totalPriceFinishCard($id) {
         return \DB::table('card')
              ->select(\DB::raw('SUM(a.articlePrice * i.sum) as total_price'))
              //->groupBy('p.image', 'p.alt', 'p.idProduct', 'p.nameProduct',
'a.articlePrice', 'i.idCard', 'i.idItemcard', 'i.sum')
             ->join('itemcard AS i' , 'i.idCard', '=', 'card.idCard')
->join('products AS p' , 'p.idProduct', '=', 'i.idProduct')
             -> join("price_article AS a" , "a.idProduct" , "=", "p.idProduct")
->where([['card.idUser', '=', $id],
                  ['StatusCard', '=', 1]])
             ->first();
    public function existOrderUser($id) {
         return \DB::table('card')
             ->where([
                 ['idUser', '=', $id],
                  ['StatusCard', '=', 1]
             ])
             ->first();
  }
Category
<?php
* Created by PhpStorm.
* User: Milica
* Date: 2/28/2019
 * Time: 10:11 PM
namespace App\Models;
class Category
private $table = 'category';
  public function getAll()
```

```
$rezultat =
           \DB::table($this->table)
              ->whereNull('subcategory')
               ->get();
       return $rezultat;
public function getAllCategory() {
}
      return \DB::table($this->table)->get();
Meni
<?php
* Created by PhpStorm.
* User: Milica
* Date: 3/5/2019
* Time: 1:01 AM
namespace App\Models;
class Meni
public $href;
public $menuname;
public function getAll()
       $rezultat =
           \DB::table('menu')
              ->paginate(10);
       return $rezultat;
}
public function insert()
           \DB::table('menu')
              ->insert([
               'href'=>$this->href,
                   'menuName' => $this->menuname
     ]);
   public function update($id)
       \DB::table('menu')
           ->where('idMenu', '=', $id)
              ->update([
                  'href'=>$this->href,
                  'menuName' => $this->menuname
       ]);
```

```
}
public function shoe($id)
       $rezultat =
           \DB::table('menu')
               ->where('idMenu', '=', $id)
               ->first();
       return $rezultat;
   public function delete($id)
\DB::table('menu')
               ->where('idMenu', '=', $id)
             ->delete();
}
Offer
<?php
* Created by PhpStorm.
* User: Milica
* Date: 3/5/2019
* Time: 4:14 AM
namespace App\Models;
class Offer
public function getAll()
       $rezultat =
           \DB::table('ouroffer')
              ->get();
       return $rezultat;
}
}
Product
<?php
* Created by PhpStorm.
* User: Milica
* Date: 2/28/2019
* Time: 12:56 AM
namespace App\Models;
use Illuminate\Database\Eloquent\Model;
```

```
class Product
   private $table = 'products';
 public $price;
   public $sizearray;
   public $id;
   public $idCategory;
   public $datePrice;
   public $nameProduct;
   public $pictureFile;
   public $description;
   public $date;
   public function get5(){
       return
            \DB::table('products')
           -> join("price article AS a" , "a.idProduct" , "=", "products.idProduct")
           ->orderBy('datePrice', "desc", 'products.idProduct')
               ->where('a.active', '=', 1)
           ->limit(5)
           ->get();
public function updateProduct($id) {
       \DB::table('products')
           ->where('idProduct', '=', $id)
            ->update([
                'nameProduct' =>$this->nameProduct,
                'image' => $this->pictureFile,
                'alt' => $this->nameProduct,
                'description'=> $this->description
              //'date' => $this->date
     ]);
   public function updateProductwithoutimg($id) {
       \DB::table('products')
           ->where('idProduct', '=', $id)
            ->update([
                'nameProduct' =>$this->nameProduct,
                'description'=> $this->description
            //'date' => $this->date
      ]);
   public function getProduct($id) {
       return \DB::table($this->table)
           ->where('idProduct', '=', $id)
        ->first();
```

```
public function delete($id) {
       return
           \DB::table('products')
               ->where('idProduct', '=', $id)->delete();
}
public function addProduct() {
\DB::transaction(function(){
       $this->id=\DB::table('products')
           ->insertGetId([
               'idCategory'=> $this->idCategory,
               'nameProduct' =>$this->nameProduct,
               'image' => $this->pictureFile,
               'alt' => $this->nameProduct,
               'description'=> $this->description,
               //'date' => $this->date
           ], 'idProduct');
       foreach($this->sizearray as $s){
           \DB::table('productsize')
               ->insert([
                   'idProduct'=> $this->id,
                   'idSize'=> $s
          ]);
        \DB::table('price_article')
           ->insert([
                 //"datePrice" => $this->datePrice,
                   "idProduct" => $this->id,
                   "articlePrice" =>$this->price
        ]);
});
}
   public function getAll()
       $rezultat =
      \DB::table($this->table)
               -> join("price article AS a" , "a.idProduct" , "=",
"products.idProduct")
               -> join ('category', 'products.idCategory', '=',
'category.idCategory')
               ->orderBy('datePrice', "desc", 'products.idProduct')
               ->where('a.active', '=', 1)
               ->paginate(6);
return $rezultat;
```

```
// GET PROODUCTS BY CATEGORY
///ova kategorija mi je mnogo problematicna!!!!!
   public function getClothesProducts()
$rezultat =
             \DB::table('category AS k')
                 ->join ('category AS c', 'k.idCategory', '=', 'c.subcategory')
-> join ('products', 'c.idCategory', '=', 'products.idCategory')
                 -> join("price_article AS a" , "a.idProduct" , "=",
"products.idProduct")
                 ->orderBy('datePrice', "desc", 'products.idProduct')
                 ->where('a.active', '=', 1)
                 ->paginate(6);
        return $rezultat;
}
   public function getByCategory($id)
        //$category=
            //\DB::table('category')
           // ->where('idCategory', '=', $id)
             //->whereNull('subcategory')
               //->get();
//if(!empty($category)){
   //if($id!=1){
        $rezultat =
             \DB::table($this->table)
                ->orderBy('date', 'desc')
                 -> join ('category', 'products.idCategory', '=',
'category.idCategory')
                 -> join("price_article AS a" , "a.idProduct" , "=",
"products.idProduct")
                     ->where([['products.idCategory', '=', $id],
                              ['a.active', '=', 1]
                 ->orderBy('datePrice', "desc", 'products.idProduct')
                 ->paginate(6);
        return $rezultat;//}
        //if($id==1){
                 //\DB::table('category AS k')
                    // ->join ('category AS c', 'k.idCategory', '=', 'c.subcategory')
//-> join ('products', 'c.idCategory', '=', 'products.idCategory')
                     //-> join("price_article AS a" , "a.idProduct" , "=",
"products.idProduct")
                     //->where('products.idCategory', '=', $id)
                     //->orderBy('datePrice', "desc", 'products.idProduct')
                    // ->paginate(6);
            //return $rezultat;
      //}
   }
    //END GET PRODUCTS BY CATEGORY
    // Category with number of products
   public function getPrimaryCategorySubcategory()
```

```
$rezultat =
    \DB::table('category AS k')
                ->select('k.name', 'k.idCategory' ,
\DB::raw('count(products.idProduct) as product_count'))
            ->join ('category AS c', 'k.idCategory', '=', 'c.subcategory')
-> join ('products', 'c.idCategory', '=', 'products.idCategory')
                ->groupBy('k.name' , 'k.idCategory')
            ->get();
       return $rezultat;
public function getPrimaryCategory()
        $rezultat =
           \DB::table($this->table)
        ->select('k.name', 'k.idCategory', \DB::raw('count(products.idProduct) as
product_count'))
        -> join ('category AS k', 'products.idCategory', '=', 'k.idCategory')
        ->whereNull('k.subcategory')
        ->groupBy('k.name' , 'k.idCategory')
        ->get();
       return $rezultat;
public function getSubCategory()
$rezultat =
            \DB::table($this->table)
                ->select('k.name' , 'k.idCategory' ,
\DB::raw('count(products.idProduct) as product_count'))
                -> join ('category AS k', 'products.idCategory', '=', 'k.idCategory')
                ->whereNotNull('k.subcategory')
                ->groupBy('k.name' , 'k.idCategory')
                ->get();
        return $rezultat;
// END Category with number of products
//count of all products
public function productCount(){
   return \DB::table($this->table)->count();
}
///sort
public function SortNameAZ($id) {
        $rezultat =
            \DB::table($this->table)
                -> join ('category', 'products.idCategory', '=',
'category.idCategory')
                -> join("price_article AS a" , "a.idProduct" , "=",
"products.idProduct")
                ->where([
                    ['products.idCategory', '=', $id],
                    ['a.active', '=', 1]
                ])
                ->orderBy('products.nameProduct', 'asc')
```

```
->paginate(6);
return $rezultat.
public function SortNameAZAll() {
       $rezultat =
            \DB::table($this->table)
                -> join ('category', 'products.idCategory', '=',
'category.idCategory')
                -> join("price article AS a" , "a.idProduct" , "=",
"products.idProduct")
               ->orderBy('products.nameProduct', 'asc')
               ->where('a.active', '=', 1)
               ->paginate(6);
       return $rezultat;
}
public function SortNameZA($id) {
       $rezultat =
           \DB::table($this->table)
                -> join ('category', 'products.idCategory', '=',
'category.idCategory')
                -> join("price article AS a" , "a.idProduct" , "=",
"products.idProduct")
               ->where([
                    ['products.idCategory', '=', $id],
                    ['a.active', '=', 1]
               ->orderBy('products.nameProduct', 'desc')
               ->paginate(6);
       return $rezultat;
}
public function SortNameZAAll() {
       $rezultat =
            \DB::table($this->table)
               -> join ('category', 'products.idCategory', '=',
'category.idCategory')
               -> join("price_article AS a" , "a.idProduct" , "=",
"products.idProduct")
               ->orderBy('products.nameProduct', 'desc')
               ->where('a.active', '=', 1)
               ->paginate(6);
       return $rezultat;
}
public function SortPriceLow($id) {
       $rezultat =
            \DB::table($this->table)
                -> join ('category', 'products.idCategory', '=',
'category.idCategory')
               -> join("price article AS a" , "a.idProduct" , "=",
"products.idProduct")
               ->where([
                    ['products.idCategory', '=', $id],
                   ['a.active', '=', 1]
               ->orderBy('a.articlePrice', 'asc')
               ->paginate(6);
```

```
return $rezultat;
public function SortPriceLowAll() {
       $rezultat =
           \DB::table($this->table)
                -> join ('category', 'products.idCategory', '=',
'category.idCategory')
               -> join("price article AS a" , "a.idProduct" , "=",
"products.idProduct")
               ->orderBy('a.articlePrice' , 'asc')
               ->where('a.active', '=', 1)
               ->paginate(6);
      return $rezultat;
}
public function SortPriceHight($id) {
       $rezultat =
           \DB::table($this->table)
               -> join ('category', 'products.idCategory', '=',
'category.idCategory')
               -> join("price article AS a" , "a.idProduct" , "=",
"products.idProduct")
               ->where([
                    ['products.idCategory', '=', $id],
                   ['a.active', '=', 1]
               ->orderBy('a.articlePrice', 'desc')
               ->paginate(6);
       return $rezultat;
}
public function SortPriceHightAll(){
       $rezultat =
           \DB::table($this->table)
               -> join ('category', 'products.idCategory', '=',
'category.idCategory')
               -> join("price_article AS a" , "a.idProduct" , "=",
"products.idProduct")
               ->orderBy('a.articlePrice' , 'desc')
               ->where('a.active', '=', 1)
               ->paginate(6);
      return $rezultat;
}
public function singleProduct($id) {
       return
        \DB::table($this->table)
           -> join("price_article AS a" , "a.idProduct" , "=", "products.idProduct")
           //-> join ('category', 'products.idCategory', '=', 'category.idCategory')
           ->where("products.idProduct", '=', $id)
           ->orderBy('a.datePrice', 'desc')
           ->first();
}
public function size($id){
```

```
return
            \DB::table('productsize')
                -> join("size", "size.idSize", "=", "productsize.idSize")
                ->where("productsize.idProduct", '=', $id)
                ->orderBy('size.nameSize' , 'asc')
                ->get();
   //funkcije koje ne rade
  //public function getininaeloquent5(){
//return \DB::table('products')
   //-> select('products.nameProduct', "pa.price")
//-> join("price_article AS a" , "a.idProduct" , "=", "products.idProduct")
   // -> join("price AS pa" , "pa.idPrice" , "=", "a.idPrice")
// ->orderBy('datePrice', "desc")
   // ->groupBy('products.nameProduct', "pa.price")
   // ->limit(5)
//->get();
//}
//public function probna() {
  //return \DB::table('products')
   //->select('products.idProduct', "products.nameProduct", "products.image",
"products.alt", "a.articlePrice")
   // -> join("price article AS a" , "a.idProduct" , "=", "products.idProduct")
   // ->whereIn('a.idPriceArticle',function ($query) {
   // $query->select('idPriceArticle' )
   //->from('price article')
   // ->orderBy('datePrice', "desc")
//->distinct('idProduct');
//->havingRaw('MAX(price_article.datePrice)')
//->orderBy(\DB::raw('MAX(price_article.datePrice)') , 'desc');
   //\DB::raw('MAX(price article.datePrice) as datePrice')
   //->orderBy('date', "desc")
   // ->limit(5)
   // ->get();
   // }
   // public function get56()
//$last=\DB::table('price_article')
  // ->select('IdProduct', \DB::raw('MAX(price_article.datePrice)'))
// ->groupBy( 'IdProduct');
//$latestPriceArticle = \DB::table('price article')
   // ->select('IdProduct', 'articlePrice', \DB::raw('MAX(price_article.datePrice) as
datePrice'))
//->groupBy( 'IdProduct', 'articlePrice');
//$array['last']=$latestPriceArticle;
  // $products = \DB::table($this->table)
// ->joinSub($latestPriceArticle, 'a', function ($join) {
```

```
// $join->on("products.IdProduct", '=', "a.IdProduct");
// })
// ->orderBy('products.date', "desc", 'datePrice', 'desc')
  // ->limit(5)
   // ->distinct("a.IdProduct")
//->get();
//$rezultat =
    // \DB::table($this->table)
    // ->select('products.idProduct', "products.nameProduct", "products.image",
"products.alt", "price_article.articlePrice", "products.date")
   // -> join("price article" , "price article.IdProduct" , "=",
"products. IdProduct")
   // ->groupBy('products.idProduct', "products.nameProduct", "products.image",
"products.alt", "price article.articlePrice", "products.date")
    //->havingRaw('max(price article.datePrice)')
    //->max("price_article.datePrice")
    //->groupBy('products.idProduct', "products.nameProduct", "products.image",
"products.alt", "price article.articlePrice")
    //->first("price_article.datePrice")
    //->distinct("products.idProduct")
   // ->whereIn("products.IdProduct" ,$latestPriceArticle )
// ->orderBy('products.date', 'desc')
// ->limit(5)
    // ->get();
//->max("price article.datePrice");
// return $products;
// }
Size
<?php
* Created by PhpStorm.
* User: Milica
* Date: 3/15/2019
 * Time: 11:59 PM
namespace App\Models;
class Size
public function getAll() {
     return \DB::table('size')->get();
}
}
User
<?php
* Created by PhpStorm.
* User: Milica
```

```
* Date: 3/7/2019
 * Time: 8:39 PM
namespace App\Models;
class User
public $userName;
public $surname;
public $email;
public $password;
public $address;
public $mobilePhone;
   public $active;
   protected $table = 'user';
   public function Add() {
      try{
                \DB::table("user")->insert([
                    "userName" => $this->userName,
                    "surname" => $this->surname,
                    "email" => $this->email,
                    "password" => md5($this->password),
                    "address" => $this->address,
                    "mobileFone" => $this->mobilePhone
      ]);
     } catch(\Throwable $e) {
           \Log::critical("Failed to insert movie.");
           throw new \Exception($e);
public function getUser($id) {
        return \DB::table($this->table)
            ->where('idUser', '=', $id)
            ->first();
}
public function UpdateuserWithoutPassword($id) {
            \DB::table("user")
                ->where('idUser', '=', $id)
                ->update([
                "userName" => $this->userName,
                "surname" => $this->surname,
                "email" => $this->email,
                    "active" => $this->active,
                "address" => $this->address,
                "mobileFone" => $this->mobilePhone
```

}

```
public function Updateuser($id) {
       try{
           \DB::table("user")
               ->where('idUser', '=', $id)
               ->update([
               "userName" => $this->userName,
               "surname" => $this->surname,
               "email" => $this->email,
               "password" => md5($this->password),
               "active" =>$this->active,
               "address" => $this->address,
               "mobileFone" => $this->mobilePhone
]);
  } catch(\Throwable $e) {
           \Log::critical("Failed to update user.");
           throw new \Exception($e);
   }
}
   public function checkUser($email, $password) {
       return \DB::table($this->table)
           ->join('role', 'role.idRole', '=', 'user.idRole')
           ->where([
               ["email", "=", $email],
               ["password", "=", md5($password)]
           ->first();
}
   public function getAll(){
       return \DB::table($this->table)
       ->get();
}
   public function deleteUser($id) {
       return \DB::table($this->table)->where('idUser', '=', $id)->delete();
}
Useractivities
<?php
* Created by PhpStorm.
* User: Milica
* Date: 3/18/2019
* Time: 12:25 PM
namespace App\Models;
```

```
class Useractivities
{
public function userActivity() {
      return \DB::table("useractivities")
    ->paginate(16);
   public function insert($name, $email, $activity){
       \DB::table("useractivities")->insert([
           "email" => $email,
           "name" => $name,
           "activiti" => $activity,
]);
}
Public/jss
backToShop.js
$('.backtoshop').click(function(e){
   e.preventDefault();
   var url= baseUrl + "/shopAll";
       $.ajax({
           url: url,
           method: "get",
           data: {
           },
           success: function(data)
               window.location = url;
           error: function(xhr, status, errMsg)
       })
})
Createcard.js
$('.createCard').click(function(e){
    //alert(baseUrl);
   var url= baseUrl + "/createCard";
   e.preventDefault();
   var card = $(this).attr('data-id');
```

```
//alert(csrf);
    var x = confirm("Da li ste sigurni?");
    if(x)
    {
        $.ajax({
            url: url,
            method: "get",
            data: {
                card: card,
            success: function(data)
                alert("You are successfuly create card");
                window.location = baseUrl + "/card";
            },
            error: function(xhr, status, errMsg)
                alert("SRY ERROR");
        })
})
Delete.js
$('.delete').click(function(e){
    //alert(baseUrl);
    var id = $(this).attr('data-id');
    var url= baseUrl + "/delete/" + id;
    e.preventDefault();
    //alert(url);
    $.ajax({
        url: url,
        method: "get",
        data: {
            //id: id,
            //csrf: csrf
            // nece da radi post
        },
        success: function(data)
            alert("You are successfuly delete item from card");
            window.location = baseUrl + "/card";
        },
        error: function(xhr, status, errMsg)
            alert("SRY ERROR");
        }
    })
```

```
})
Deletemenu.js
$('.deleteMenu').click(function(e){
    //alert(baseUrl);
    var id = $(this).attr('data');
    var url= baseUrl + "/adminmenu/" + id;
    e.preventDefault();
    //alert(url);
    $.ajaxSetup({
        headers: {
            'X-CSRF-TOKEN': $('meta[name="csrf-token"]').attr('content')
    });
    $.ajax({
        url: url,
        method: "delete",
        data: {
            //id: id,
            //csrf: csrf
            // nece da radi post
        success: function (data)
           var podaci="";
           var br=0;
            console.log(data.data);
            $.each(data.data, function(index, value){
                podaci+="" +
                    " \n" +
                    "\n" +
                                         \t  "+value.idMenu+"  \n" +
                    11
                                         "+value.href+"\n" +
                    11
                                         \t  "+value.menuName+"  \n" +
                    "\n" +
                                          <a
href=\"http://localhost/shopfirst/public/adminmenu"+value.idMenu+"/edit\">\n" +
                                                <i class=\"material-</pre>
icons\">update</i>\n" +
                                             </a>\n" +
                    11
                                         \n" +
                    11
                                         \n" +
                    "\n" +
                                             \langle a \text{ href=} "#\" >\n" +
                    "\n" +
```

deleteMenu\" data=\""+value.idMenu+"\"> delete_forever</i>\n" +

11

br+=1;

<i class=\"material-icons</pre>

 $< \overline{/}a > \n'' +$

 $\n" +$

";

```
});
           $('#menu').html(podaci);
           //console.log(data);
       },
       error: function(xhr, status, errMsg)
           alert("SRY ERROR");
       }
   })
})
Deleteproduct.js
$('.deleteProduct').click(function(e){
    //alert(baseUrl);
   var id = $(this).attr("data");
    //var csrf = $(this).attr("csrf");
   var url= "http://localhost/shopfirst/public/adminproduct/delete/" + id;
   e.preventDefault();
    alert(id);
    $.ajax({
       url: url,
       method: "get",
           data: {
           //csrf: csrf
           // nece da radi post
       },
       success: function (data)
           var podaci="";
           var br=0;
           console.log(data.data);
           $.each(data.data, function(index, value){
               podaci+= "\n" +
                   "\n" +
                                        "+value.idProduct+"\n" +
                   **
                                        \t  "+value.nameProduct + " \n" +
                                         <img src=\"images/"+value.image+"\"
alt=\""+value.alt+"\" class=\"figure-img\"> \n" +
                                        \t  "+value.description + " \n" +
                   11
                                        \t  "+value.date + " \n" +
                   11
                                        \t  "+value.articlePrice+"  \n" +
                                        "+value.name+"\n" +
                   "\n" +
```

```
**
                                         <a href=\"#\">\n" +
                                                <i class=\"material-icons\"</pre>
data="+value.idProduct+">update</i>\n" +
                                            </a>\n" +
                    11

                    11
                                        \n" +
                   "\n" +
                                            <a href=\"#\" >\n" +
                   "\n" +
                                                <i class=\"material-icons</pre>
deleteProduct\" data="+value.idProduct+"> delete forever</i>\n" +
                                          </a>\n" +
                                        \n" +
                    ...
                                    ";
               br+=1;
           });
            $('#products').html(podaci);
           //console.log(data);
        },
       error: function(xhr, status, errMsg)
           alert("SRY ERROR");
       }
   })
})
loverSum.js
$('.loversum').click(function(e){
    //alert(baseUrl);
   var id = $(this).attr('data-idsi');
   var url= baseUrl + "/loverSum/" +id;
    e.preventDefault();
   //alert(pr);
    $.ajax({
       url: url ,
       method: "get",
       data: {
       },
       success: function(data)
        {
            window.location = baseUrl + "/card";
       },
       error: function(xhr, status, errMsg)
        {
            alert("SRY ERROR");} })})
```

Resources/views/lazouts

```
Layout.blade.php
@include('partial.head')
<script>
    let baseUrl='{{url('/')}}';
    let csrf='{{csrf token()}}';
</script>
@include('partial.navbar')
@include('partial.menu')
@yield('mid')
@yield('collection')
@yield('ourOffer')
@yield('featureProducts')
@yield('bigSale')
@include('partial.footer')
@yield("scripts")
Adminlayout.blade.php
@include('partial.admin.head')
<script>
    let baseUrl='{{url('/')}}';
    let csrf='{{csrf_token()}}';
</script>
@include('partial.admin.table')
@include('partial.admin.navbar')
@include('partial.admin.content')
@include('partial.admin.futer')
@yield('scripts')
Resources/views/partial
bigSail.blade.php
<div class="site-section block-8">
    <div class="container">
        <div class="row justify-content-center mb-5">
            <div class="col-md-7 site-section-heading text-center pt-4">
                <h2>Big Sale!</h2>
            </div>
        </div>
        <div class="row align-items-center">
            <div class="col-md-12 col-lg-7 mb-5">
                <a href="#"><img src="{{asset('/')}}images/blog 1.jpg" alt="Image
placeholder" class="img-fluid rounded"></a>
            </div>
            <div class="col-md-12 col-lg-5 text-center pl-md-5">
                <h2><a href="#">50% less in all items</a></h2>
                By <a href="#">Carl Smith</a> <span</pre>
class="block-8-sep">•</span> September 3, 2018
               >Lorem ipsum dolor sit amet, consectetur adipisicing elit. Quisquam
iste dolor accusantium facere corporis ipsum animi deleniti fugiat. Ex, veniam?
                <a href="#" class="btn btn-primary btn-sm">Shop Now</a>
            </div>
        </div>
```

```
</div>
</div>
futureProducts.blade.php
<div class="site-section block-3 site-blocks-2 bg-light">
   <div class="container">
       <div class="row justify-content-center">
          <div class="col-md-7 site-section-heading text-center pt-4">
              <h2>Featured Products</h2>
           </div>
       </div>
       <div class="row">
           <div class="col-md-12">
              <div class="nonloop-block-3 owl-carousel">
                  @foreach($product as $p)
                      <div class="item">
                         <div class="block-4 text-center">
                            <figure class="block-4-image">
                                <img src="{{asset('/')}}images/{{$p->image}}"
alt="{{$p->alt}}" class="img-fluid">
                             </figure>
                            <div class="block-4-text p-4">
                                <h3><a href="#">{ {$p->nameProduct} } </a></h3>
                                Finding perfect products
                                {{$p-
>price } } $ 
                            </div>
                         </div>
                     </div>
                     @endforeach
              </div>
          </div>
       </div>
   </div>
</div>
Footer.blade.php
<footer class="site-footer border-top">
   <div class="container">
       <div class="row">
          <div class="col-lg-6 mb-5 mb-lg-0">
              <div class="row">
                  <div class="col-md-12">
                     <h3 class="footer-heading mb-4">Navigations</h3>
                  </div>
                  <div class="col-md-6 col-lg-4">
                     <a href="#">Sell online</a>
                         <a href="#">Features</a>
                         <a href="#">Shopping cart</a>
                         <a href="#">Store builder</a>
                     </div>
                  <div class="col-md-6 col-lg-4">
                     <a href="#">Mobile commerce</a>
                         <a href="#">Dropshipping</a>
                         <a href="#">Website development</a>
                     </div>
                  <div class="col-md-6 col-lg-4">
```

```
<a href="#">Point of sale</a>
                          <a href="#">Hardware</a>
                          <a href="#">Software</a>
                      </div>
               </div>
           </div>
           <div class="col-md-6 col-lg-3">
               <div class="block-5 mb-5">
                  <h3 class="footer-heading mb-4">Contact Info</h3>
                  class="address">203 Fake St. Mountain View, San Francisco,
California, USA
                      <a href="tel://23923929210">+2 392 3929
210</a></li>
                      emailaddress@domain.com
                  </ul>
               </div>
           </div>
       </div>
       <div class="row pt-5 mt-5 text-center">
           <div class="col-md-12">
               <p>
                  <!-- Link back to Colorlib can't be removed. Template is licensed
under CC BY 3.0. -->
                  Copyright © <script data-cfasync="false" src="/cdn-
cgi/scripts/5c5dd728/cloudflare-static/email-
decode.min.js"></script><script>document.write(new Date().getFullYear());</script> All
rights reserved | This template is made with <i class="icon-heart" aria-
hidden="true"></i> by <a href="https://colorlib.com" target=" blank" class="text-
primary">Colorlib</a>
                  <!-- Link back to Colorlib can't be removed. Template is licensed
under CC BY 3.0. -->
               </div>
       </div>
   </div>
</footer>
</div>
<script src="{{asset('/')}}js/jquery-3.3.1.min.js"></script>
<script src="{{asset('/')}}js/jquery-ui.js"></script>
<script src="{{asset('/')}}js/popper.min.js"></script>
<script src="{{asset('/')}}js/bootstrap.min.js"></script>
<script src="{{asset('/')}}js/owl.carousel.min.js"></script>
<script src="{{asset('/')}}js/jquery.magnific-popup.min.js"></script>
<script src="{{asset('/')}}js/aos.js"></script>
<script src="{{asset('/')}}js/main.js"></script>
</body>
</html>
Head.blade.php
<!DOCTYPE html>
<html lang="en">
<head>
```

```
<title>@yield('title')</title>
    <meta charset="utf-8">
    <meta name="viewport" content="width=device-width, initial-scale=1, shrink-to-
fit=no">
    <link rel="stylesheet"</pre>
href="https://fonts.googleapis.com/css?family=Mukta:300,400,700">
    <link rel="stylesheet" href="{{asset('/')}}}fonts/icomoon/style.css">
    <link rel="stylesheet" href="{{asset('/')}}css/bootstrap.min.css">
    <link rel="stylesheet" href="{{asset('/')}}css/magnific-popup.css">
    <link rel="stylesheet" href="{{asset('/')}}css/jquery-ui.css">
    <link rel="stylesheet" href="{{asset('/')}}css/owl.carousel.min.css">
    <link rel="stylesheet" href="{{asset('/')}}css/owl.theme.default.min.css">
    k rel="stylesheet" href="{{asset('/')}}css/aos.css">
    <link rel="stylesheet" href="{{asset('/')}}css/style.css">
</head>
Menu.blade.php
<nav class="site-navigation text-right text-md-center" role="navigation">
    <div class="container">
        @isset($meni)
                @foreach($meni as $m)
                    <1i>>
                        @if($m->menuName=='Login')
                            @if(!session('user'))
                                <a href="{{asset('/')}}{{$m->href}}">{{$m-
>menuName} </a></a></a>
                            @endif
                            @elseif($m->menuName=='Register')
                                @if(!session('user'))
                                    <a href="{{asset('/')}}}{{$m->href}}}">{{$m-
>menuName} </a></a></a></a>
                                @endif
                        @elseif($m->menuName=='Logout')
                                @if(session('user'))
                                    <a href="{{asset('/')}}{{$m->href}}}">{{$m-
>menuName} </a></a></a></a>
                                @endif
                        @elseif($m->menuName=='admin Panel')
                            @if(session('user') && session('user')->nameRole ==
'admin')
                                <a href="{{asset('/')}}{{$m->href}}">{{$m-
>menuName} </a></a></a></a>
                            @endif
                         @else
                        <a href=""{{asset('/')}}{{$m->href}}">{{$m->menuName}}</a>
                            @endif
                    @endforeach
            @endisset
```

```
</ul>
   </div>
</nav>
</header>
Navbar.blade.php
<body>
<div class="site-wrap">
    <header class="site-navbar" role="banner">
        <div class="site-navbar-top">
           <div class="container">
               <div class="row align-items-center">
                   <div class="col-6 col-md-4 order-2 order-md-1 site-search-icon</pre>
text-left">
                       <form action="" class="site-block-top-search">
                           <span class="icon icon-search2"></span>
                           <input type="text" class="form-control border-0"</pre>
placeholder="Search">
                       </form>
                   </div>
                   <div class="col-12 mb-3 mb-md-0 col-md-4 order-1 order-md-2 text-
center">
                       <div class="site-logo">
                           <a href="{{asset('/')}}" class="js-logo-clone">Street
Shop</a>
                       </div>
                       <div class="site-logo">
                           @if(session('message'))
                               <div class="text-success">{{ session('message') }}
</div>
                           @endif
                               @if(session('error'))
                                   <div class="text-danger">{{ session('error') }}
</div>
                               @endif
                       </div>
                   </div>
                   <div class="col-6 col-md-4 order-3 order-md-3 text-right">
                       <div class="site-top-icons">
                           <u1>
                               @if(session('user'))
                                   <a
href="{{asset('/')}}userCardFinished/{{session('user')->idUser}}"><span class="icon</pre>
icon-person"></span></a>
                               @endif
                               <a href="#"><span class="icon icon-heart-</a>
o"></span></a>
                               <1i>>
                                   <a href="{{asset('/')}}}card" class="site-cart">
                                       <span class="icon icon-shopping cart"></span>
                                       <span class="count">2</span>
                                   </a>
                               <a</pre>
```

```
href="#" class="site-menu-toggle js-menu-toggle"><span class="icon-
menu"></span></a>
                            </div>
                    </div>
                </div>
            </div>
        </div>
ourOffer.blade.php
<div class="site-section site-section-sm site-blocks-1">
    <div class="container">
        <div class="row">
            @isset($offer)
                @foreach($offer as $f)
                    <div class="col-md-6 col-lg-4 d-lg-flex mb-4 mb-lg-0 pl-4" data-</pre>
aos="fade-up" data-aos-delay="">
                        <div class="icon mr-4 align-self-start">
                            <span class="{{$f->class}}"></span>
                        </div>
                        <div class="text">
                            <h2 class="text-uppercase">{{\$f->title}}</h2>
                            {p>{ {$f->text} } 
                        </div>
                    </div>
                @endforeach
@endisset
       </div>
    </div>
</div>
Resources/views/partial/admin
Content.blade.php
<!-- End Navbar -->
<div class="content">
    <div class="container-fluid">
        <div class="site-logo">
            @if(session('message'))
            <div class="text-success">{{ session('message') }} </div>
        @endif
        @if(session('error'))
            <div class="text-danger">{{ session('error') }} </div>
        @endif
  </div>
        @yield('midadmin')
    </div>
</div>
Futer.blade.php
<footer class="footer">
    <div class="container-fluid">
        <nav class="float-left">
            <ul>
```

```
<1i>>
                    <a href="https://www.creative-tim.com">
                        Creative Tim
                    </a>
                </nav>
        <div class="copyright float-right">
            ©
            <script>
                document.write(new Date().getFullYear())
            </script>, made with <i class="material-icons">favorite</i> by
            <a href="https://www.creative-tim.com" target=" blank">Creative Tim</a>
for a better web.
        </div>
        <!-- your footer here -->
    </div>
</footer>
</div>
</div>
</body>
</html>
Head.blade.php
<!doctype html>
<html lang="en">
<head>
    <title>Hello, world!</title>
    <!-- Required meta tags -->
    <meta charset="utf-8">
    <meta content="width=device-width, initial-scale=1.0, maximum-scale=1.0, user-
scalable=0" name="viewport" />
    <meta http-equiv="X-UA-Compatible" content="IE=edge,chrome=1" />
    <meta name="csrf-token" content="{{csrf token()}}" />
             Fonts and icons
    <link rel="stylesheet" type="text/css"</pre>
href="https://fonts.googleapis.com/css?family=Roboto:300,400,500,700|Roboto+Slab:400,7
00|Material+Icons" />
    <link rel="stylesheet" href="https://maxcdn.bootstrapcdn.com/font-</pre>
awesome/latest/css/font-awesome.min.css">
    <!-- Material Kit CSS -->
    <link href="{{asset('/')}}assets/css/material-dashboard.css?v=2.1.1"</pre>
rel="stylesheet" />
</head>
Navbar.blade.php
<div class="main-panel">
    <!-- Navbar -
    <nav class="navbar navbar-expand-lg navbar-transparent navbar-absolute fixed-top</pre>
">
        <div class="container-fluid">
            <div class="navbar-wrapper">
                <a class="navbar-brand" href="{{asset('/')}}">Back to site</a>
                <a class="navbar-brand" href="#pablo">Dashboard</a>
            </div>
            <button class="navbar-toggler" type="button" data-toggle="collapse" aria-</pre>
controls="navigation-index" aria-expanded="false" aria-label="Toggle navigation">
```

```
<span class="sr-only">Toggle navigation</span>
              <span class="navbar-toggler-icon icon-bar"></span>
              <span class="navbar-toggler-icon icon-bar"></span>
              <span class="navbar-toggler-icon icon-bar"></span>
          </button>
          <div class="collapse navbar-collapse justify-content-end">
             <a class="nav-link" href="#pablo">
                        <i class="material-icons">notifications</i> Notifications
                 <!-- your navbar here -->
             </ul>
          </div>
       </div>
   </nav>
Table.blade.php
<body>
<div class="wrapper ">
   <div class="sidebar" data-color="purple" data-background-color="white">
       Tip 1: You can change the color of the sidebar using: data-color="purple |
azure | green | orange | danger"
      Tip 2: you can also add an image using data-image tag
      <div class="logo">
          <a href="{{asset('/')}}" class="simple-text logo-mini">
             Streatshop
          <a href="#" class="simple-text logo-normal">
             Milica Ivančić
          </a>
       </div>
       <div class="sidebar-wrapper">
          <a class="nav-link" href="{{route('adminuser.index')}}">
                    <i class="material-icons">dashboard</i>
                    Users
                 </a>
             <a class="nav-link" href="{{route('adminproduct.index')}}">
                    <i class="material-icons">dashboard</i>
                    Products
                 </a>
              <a class="nav-link" href="{{route('adminmenu.index')}}">
                    <i class="material-icons">dashboard</i>
                    menu
                 </a>
             <a class="nav-link" href="#">
                    <i class="material-icons">dashboard</i>
                    category
```

```
</a>
           <a class="nav-link" href="#">
                 <i class="material-icons">dashboard</i>
                 <p>role</p>
              </a>
           <a class="nav-link" href="#">
                 <i class="material-icons">dashboard</i>
                 <p>size</p>
              </a>
           <!-- your sidebar here -->
        </div>
  </div>
Resources/views/pages
Card.blade.php
@extends('layouts.layout')
@section('title') Contact @endsection
@section('mid')
  <div class="bg-light py-3">
     <div class="container">
        <div class="row">
           <div class="col-md-12 mb-0"><a href="{{asset('/')}}}">Home</a> <span
class="mx-2 mb-0">/</span> <strong class="text-black">Card</strong></div>
        </div>
     </div>
  </div>
   <div class="site-section">
     <div class="container">
        <div class="row mb-5">
           <form class="col-md-12" method="post">
              <div class="site-blocks-table">
                 <thead>
                    <tr>
                       Image
                       Product
                       Price
                       Quantity
                       Total
                       Remove
                    </thead>
                    @if(!$exist)
                        <button class="btn btn btn-</td>
```

```
primary js-btn-plus btn-block createCard" data-id="{{$user-
>idUser}}"type="button">CREATE CARD</button> 
                             @endif
                         @if($exist)
                             @if($productsexist)
                                 @foreach($products as $p)
                                     <img src="{{asset('/')}} images/{{$p-
>image}}" alt="{{$p->alt}}" class="img-milica">
                                        <h2 class="h5 text-black">{{$p-
>nameProduct} }</h2>
                                        ${{$p->articlePrice}}
                                        >
                                            <div class="input-group mb-3"
style="max-width: 120px;">
                                                <div class="input-group-prepend">
                                                    <button data-idsi="{{$p-
>idItemcard}}" class="btn btn-outline-primary js-btn-minus loversum"
type="button">−</button>
                                                <input type="text" class="form-</pre>
control text-center " name="sum" id="sum" value="{{\p->sum}}" placeholder="" aria-
label="Example text with button addon" aria-describedby="button-addon1" readonly>
                                                <div class="input-group-append">
                                                    <button data-ids="{{$p-
>idItemcard}}" class="btn btn-outline-primary js-btn-plus update"
type="button">+</button>
                                                </div>
                                            </div>
                                        ${{$p->articlePrice * $p->sum}}
                                        <a href="{{asset('/delete')}}" data-
id="{{$p->idItemcard}}" class="btn btn-primary btn-sm delete">X</a>
                                     @endforeach
                                 @endif
                             @if(!$productsexist)
                              <button class="btn btn-outline-
primary btn-sm btn-block backtoshop" type="button">Your card is empty, back to shop
and add items</button> 
                                 @endif
                          @endif
                          </div>
               </form>
           </div>
           <div class="row">
              <div class="col-md-6">
                  <div class="row mb-5">
                      <div class="col-md-6 mb-3 mb-md-0">
                          <button class="btn btn-primary btn-sm btn-block">Update
Cart</button>
                      </div>
                      <div class="col-md-6">
                          <button class="btn btn-outline-primary btn-sm btn-block</pre>
backtoshop">Continue Shopping</button>
```

```
</div>
                    </div>
                </div>
                <div class="col-md-6 pl-5">
                    <div class="row justify-content-end">
                         <div class="col-md-7">
                             <div class="row">
                                 <div class="col-md-12 text-right border-bottom mb-5">
                                     <h3 class="text-black h4 text-uppercase">Cart
Totals</h3>
                                 </div>
                             </div>
                             <div class="row mb-3">
                                 <div class="col-md-6">
                                     <span class="text-black">Total</span>
                                 </div>
                                 <div class="col-md-6 text-right">
                                     <strong class="text-black">
                                         @if($exist)
                                             @if($productsexist)
                                           ${{$totalPrice->total price}}
                                             @endif
                                             @endif
                                     </strong>
                                 </div>
                             </div>
                             @if($exist)
                                 @if($productsexist)
                             <div class="row">
                                 <div class="col-md-12">
                                     <button class="btn btn-primary btn-lg py-3 btn-</pre>
block" onclick="window.location='{{asset('/')}}congratulatio/{{$products[0]-
>idCard}}'">Proceed To Checkout</button>
                                 </div>
                             </div>
                                 @endif
                                 @endif
                        </div>
                    </div>
                </div>
            </div>
        </div>
    </div>
@endsection
@section("scripts")
    <script src="{{asset('/')}}js/createCard.js"></script>
    <script src="{{asset('/')}}js/backToShop.js"></script>
    <script src="{{asset('/')}}js/updateitem.js"></script>
    <script src="{{asset('/')}}js/delete.js"></script>
    <script src="{{asset('/')}}js/loverSum.js"></script>
    @endsection
Congratulation.blade.ppčhp
@extends('layouts.layout')
```

```
@section('title') Contact @endsection
@section('mid')
<div class="bg-light py-3">
        <div class="container">
            <div class="row">
                <div class="col-md-12 mb-0"><a href="{{asset('/')}}}">Home</a> <span
class="mx-2 mb-0">/</span> <strong class="text-black">Congratulation</strong></div>
            </div>
        </div>
    </div>
    <div class="site-section">
        <div class="container">
            <div class="row">
                <div class="col-md-12 text-center">
                    <span class="icon-check circle display-3 text-success"></span>
                    <h2 class="display-3 text-black">Thank you!</h2>
                    You order was successfuly completed.
                    <a href="{{asset('/')}} shopAll" class="btn btn-sm btn-</p>
primary">Back to shop</a>
            </div>
        </div>
    </div>
@endsection
@section('ourOffer') @include('partial.ourOffer') @endsection
Contact.blade.php
@extends('layouts.layout')
@section('title') Contact @endsection
@section('mid')
   <div class="bg-light py-3">
        <div class="container">
            <div class="row">
                <div class="col-md-12 mb-0"><a href="{{asset('/')}}">Home</a> <span
class="mx-2 mb-0">/</span> <strong class="text-black">Contact</strong></div>
            </div>
        </div>
    </div>
    <div class="site-section">
        <div class="container">
            <div class="row">
                <div class="col-md-12">
                    <h2 class="h3 mb-3 text-black">Get In Touch</h2>
                <div class="col-md-7">
                    <form action="#" >
                        <div class="p-3 p-1g-5 border">
                            <div class="form-group row">
                                <div class="col-md-6">
```

```
<label for="c fname" class="text-black">First Name
<span class="text-danger">*</span></label>
                                    <input type="text" class="form-control"</pre>
id="c fname" name="c fname">
                                </div>
                                <div class="col-md-6">
                                    <label for="c lname" class="text-black">Last Name
<span class="text-danger">*</span></label>
                                    <input type="text" class="form-control"</pre>
id="c lname" name="c lname">
                                </div>
                            </div>
                            <div class="form-group row">
                                <div class="col-md-12">
                                    <label for="c email" class="text-black">Email
<span class="text-danger">*</span></label>
                                    <input type="email" class="form-control"</pre>
id="c email" name="c email" placeholder="">
                                </div>
                            </div>
                            <div class="form-group row">
                                <div class="col-md-12">
                                    <label for="c subject" class="text-black">Subject
</label>
                                    <input type="text" class="form-control"</pre>
id="c subject" name="c subject">
                                </div>
                            </div>
                            <div class="form-group row">
                                <div class="col-md-12">
                                    <label for="c message" class="text-black">Message
</label>
                                    <textarea name="c_message" id="c_message"
cols="30" rows="7" class="form-control"></textarea>
                                </div>
                            </div>
                            <div class="form-group row">
                                <div class="col-lg-12">
                                    <input type="submit" class="btn btn-primary btn-lg</pre>
btn-block" value="Send Message">
                                </div>
                            </div>
                        </div>
                    </form>
                </div>
                <div class="col-md-5 ml-auto">
                    <div class="p-4 border mb-3">
                        <span class="d-block text-primary h6 text-uppercase">New
York</span>
                        203 Fake St. Mountain View, San Francisco,
California, USA
                    <div class="p-4 border mb-3">
                        <span class="d-block text-primary h6 text-</pre>
uppercase">London</span>
                        203 Fake St. Mountain View, San Francisco,
California, USA
                    <div class="p-4 border mb-3">
                        <span class="d-block text-primary h6 text-</pre>
uppercase">Canada</span>
                        203 Fake St. Mountain View, San Francisco,
```

```
California, USA
                    </div>
                </div>
            </div>
        </div>
    </div>
@endsection
@section('ourOffer') @include('partial.ourOffer') @endsection
Login.blade.php
@extends('layouts.layout')
@section('title') Contact @endsection
@section('mid')
   <div class="bg-light py-3">
        <div class="container">
            <div class="row">
                <div class="col-md-12 mb-0"><a href="{{asset('/')}}}">Home</a> <span
class="mx-2 mb-0">/</span> <strong class="text-black">Contact</strong></div>
            </div>
        </div>
    </div>
    <div class="site-section">
        <div class="container">
            <div class="row">
<form action="{{route('login')}}" method="post">
    @csrf
    <div class="form-group">
        <label for="exampleInputEmail1">Email address</label>
        <input type="email" class="form-control" id="exampleInputEmail1" aria-</pre>
describedby="emailHelp" placeholder="Enter email" name="email">
        <small id="emailHelp" class="form-text text-muted">We'll never share your
email with anyone else. </small>
    </div>
    <div class="form-group">
        <label for="exampleInputPassword1">Password</label>
        <input type="password" class="form-control" id="exampleInputPassword1"</pre>
placeholder="Password" name="password">
    </div>
    <button type="submit" class="btn btn-primary" name="login">Submit</button>
</form>
            </div> </div>
    @endsection
Products.blade.php
@extends('layouts.layout')
@section('title') Products @endsection
@section('mid')
```

```
<div class="bg-light py-3">
        <div class="container">
            <div class="row">
                 <div class="col-md-12 mb-0"><a href="{{asset('/')}}}">Home</a> <span
class="mx-2 mb-0">/</span> <strong class="text-black">Products</strong></div>
            </div>
        </div>
    </div>
    <div class="site-section">
        <div class="container">
            <div class="row mb-5">
                <div class="col-md-9 order-2">
                     <div class="row">
                         <div class="col-md-12 mb-5">
                             <div class="float-md-left mb-4"><h2 class="text-black"</pre>
h5">Shop {{$product[0]->name}}</h2></div>
                             <div class="d-flex">
                                 <div class="dropdown mr-1 ml-md-auto">
                                      <button type="button" class="btn btn-secondary</pre>
btn-sm dropdown-toggle" id="dropdownMenuOffset" data-toggle="dropdown" aria-
haspopup="true" aria-expanded="false">
                                          Lat.est.
                                     </button>
                                     <div class="dropdown-menu" aria-
labelledby="dropdownMenuOffset">
                                          @foreach($prcategory as $p)
                                              <a class="dropdown-item"</pre>
href="{{asset('/')}}shopByCategory/{{$p->idCategory}}">{{$p->name}}</a>
                                          @endforeach
                                              @foreach($primaryCategorySub as $p)
                                                  <a class="dropdown-item"
href="{{asset('/')}} shopClothes">{{$p->name}}</a></a>
                                              @endforeach
                                     </div>
                                 </div>
                                 <div class="btn-group">
                                     <button type="button" class="btn btn-secondary</pre>
btn-sm dropdown-toggle" id="dropdownMenuReference" data-
toggle="dropdown">Reference</button>
                                     <div class="dropdown-menu" aria-
labelledby="dropdownMenuReference">
                                          @if(session()->get('category')[0]=='all')
                                              <a class="dropdown-item"</pre>
href="{{asset('/')}}}SortNameAZ/">Name, A to Z</a>
                                              <a class="dropdown-item"</pre>
href="{{asset('/')}}}SortNameZA/">Name, Z to A</a>
                                              <div class="dropdown-divider"></div>
                                              <a class="dropdown-item"</pre>
href="{{asset('/')}}}SortPriceLow/">Price, low to high</a>
                                              <a class="dropdown-item"</pre>
href="{{asset('/')}}}SortPriceHight/">Price, high to low</a>
                                         @else
                                          <a class="dropdown-item"</pre>
href="{{asset('/')}}SortNameAZ/{{$product[0]->idCategory}}">Name, A to Z</a>
                                          <a class="dropdown-item"
href="{{asset('/')}}SortNameZA/{{$product[0]->idCategory}}">Name, Z to A</a>
                                          <div class="dropdown-divider"></div>
                                          <a class="dropdown-item"
```

```
href="{{asset('/')}}}SortPriceLow/{{$product[0]->idCategory}}">Price, low to high</a>
                                     <a class="dropdown-item"</pre>
href="{{asset('/')}}}SortPriceHight/{{$product[0]->idCategory}}">Price, high to low</a>
                                         @endif
                                 </div>
                              </div>
                          </div>
                      </div>
                  </div>
                   <div class="row mb-5">
@foreach($product as $p)
                      <div class="col-sm-6 col-lg-4 mb-4" data-aos="fade-up">
                          <div class="block-4 text-center border">
                              <figure class="block-4-image">
                                 <a href="{{asset('/')}}singleProduct/{{$p-
>idProduct}}"><img src="{{asset('/')}}images/{{$p->image}}" alt="{{$p->alt}}"
class="img-thumbnail"></a>
                              </figure>
                              <div class="block-4-text p-4">
                                  <h3><a href="{{asset('/')}} singleProduct/{{$p-
>idProduct} ">{ { p->nameProduct} } </a></h3>
                                 Finding perfect {{$p->name}}
                                 {{$p-
>articlePrice} } $
                              </div>
                          </div>
                      </div>
      @endforeach
                  </div>
                  <div class="row" data-aos="fade-up">
                              {{ $product->links() }}
                  </div>
               </div>
               <div class="col-md-3 order-1 mb-5 mb-md-0">
                   <br/>
                   <br/>
                  <hr/>
                  <hr/>
                  <div class="border p-4 rounded mb-4">
                      <h3 class="mb-3 h6 text-uppercase text-black d-
block">Categories</h3>
                      <a href="{{asset('/')}} shopAll" class="d-</pre>
flex"><span>all</span> <span class="text-black ml-auto">({{$count}})</span></a>
                          @foreach($prcategory as $p)
                          class="mb-1"><a
href="{{asset('/')}}shopByCategory/{{$p->idCategory}}" class="d-flex"><span>{{$p-
>name}}</span> <span class="text-black ml-auto">({{$p-
>product count} ) </span></a>
                          @endforeach
                              @foreach($primaryCategorySub as $p)
                                 class="mb-1"><a
href="{{asset('/')}}shopClothes" class="d-flex"><span>{{$p->name}}</span> <span</pre>
class="text-black ml-auto">({{\p->product_count}})</span></a>
                                 class="list-unstyled mb-0">
                                     @foreach($subcategory as $p)
                                         class="mb-1"><a</li>
href="{{asset('/')}}shopByCategory/{{$p->idCategory}}" class="d-flex"><span>{{$p-
>name}}>name}}
```

```
>product count}})</a>
                                      @endforeach
                                   @endforeach
                       </div>
               </div>
           </div>
           @endsection
           @section('ourOffer') @include('partial.ourOffer') @endsection
Registerform.blade.php
@extends('layouts.layout')
@section('title') Contact @endsection
@section('mid')
   <div class="bg-light py-3">
       <div class="container">
           <div class="row">
               <div class="col-md-12 mb-0"><a href="{{asset('/')}}}">Home</a> <span
class="mx-2 mb-0">/</span> <strong class="text-black">Contact</strong></div>
           </div>
       </div>
   </div>
    <div class="site-section">
       <div class="container">
           @isset($errors)
               @foreach($errors->all() as $greska)
                        {{ $greska}
} } 
                   @endforeach
               <br/>
<br/>
<br/>
<br/>
           @endisset
               <form action="{{route('r')}}" method="post">
                   <div class="form-group">
                       <label>Name</label>
                       <input type="text" class="form-control" id="name"</pre>
placeholder="Name" name="name">
                   </div>
                   <div class="form-group">
                       <label>Surname</label>
                       <input type="text" class="form-control" id="surname"</pre>
placeholder="Surname" name="surname">
                   </div>
                   <div class="form-group">
                       <label for="exampleInputEmail1">Email address</label>
                       <input type="email" class="form-control"</pre>
id="exampleInputEmail1" aria-describedby="emailHelp" placeholder="Enter email"
name="email">
                       <small id="emailHelp" class="form-text text-muted">We'll never
share your email with anyone else.</small>
                   </div>
                   <div class="form-group">
                       <label for="exampleInputPassword1">Password</label>
```

```
<input type="password" class="form-control"</pre>
id="exampleInputPassword1" placeholder="Password" name="password">
                    </div>
                    <div class="form-group">
                        <label>Adress</label>
                        <input type="text" class="form-control" id="adress"</pre>
placeholder="Adress" name="adress">
                    </div>
                    <div class="form-group">
                        <label>Mobile</label>
                        <input type="text" class="form-control" id="mobile"</pre>
placeholder="mobile fone" name="mobile">
                    </div>
                    <button type="submit" class="btn btn-primary"</pre>
name="btnregister">Register</button>
                </form>
             </div>
@endsection
Singleproduct.blade.php
@extends('layouts.layout')
@section('title') Single product @endsection
@section('mid')
<div class="bg-light py-3">
    <div class="container">
        <div class="row">
            <div class="col-md-12 mb-0"><a href="{{asset('/')}}}">Home</a> <span
class="mx-2 mb-0">/</span> <strong class="text-black">{{$product-
>nameProduct} } </strong></div>
        </div>
    </div>
</div>
<div class="site-section">
    <div class="container">
        <div class="row">
            <div class="col-md-6">
                <img src="{{asset('/')}}images/{{$product->image}}" alt="{{$product-
>alt}}" alt="Image" class="img-fluid">
            <div class="col-md-6">
                <h2 class="text-black">{{$product->nameProduct}}</h2>
                {p>{ {$product->description} } 
                <strong class="text-primary h4">{{$product->articlePrice}}
$</strong>
                <form action="{{asset('/')}}addToCard/{{$product->idProduct}}"
method="post">
                    @csrf
                <div class="mb-1 d-flex">
                    @foreach($size as $s)
                    <label for="option-sm" class="d-flex mr-3 mb-3">
                        <span class="d-inline-block mr-2" style="top:-2px; position:</pre>
relative; "><input type="radio" name="size" value="{{$s->idSize}}" id="option-sm"
```

```
name="shop-sizes"></span> <span class="d-inline-block text-black">{{$s-
>nameSize} } </span>
                   </label>
                   @endforeach
               </div>
               <div class="mb-5">
                   <div class="input-group mb-3" style="max-width: 120px;">
                       <div class="input-group-prepend">
                           <button class="btn btn-outline-primary js-btn-minus"</pre>
type="button">−</button>
                       </div>
                       <input type="text" class="form-control text-center" name="sum"</pre>
value="1" placeholder="" aria-label="Example text with button addon" aria-
describedby="button-addon1">
                       <div class="input-group-append">
                           <button class="btn btn-outline-primary js-btn-plus"</pre>
type="button">+</button>
                       </div>
                   </div>
               </div>
               <button name="btnadTocard"class="buy-now btn btn-sm btn-
primary">Add To Cart</button>
                   </form>
               @isset($errors)
                   @foreach($errors->all() as $greska)
                            {{
$greska }} 
                       @endforeach
                       @endisset
                   </div>
       </div>
    </div>
</div>
 @endsection
@section('ourOffer') @include('partial.ourOffer') @endsection
Streetstore.blade.php
@extends('layouts.layout')
@section('title') StreetShop @endsection
@section('collection')
   <div class="site-section site-blocks-2">
       <div class="container">
           <div class="row">
               @foreach($collection as $p)
               <div class="col-sm-6 col-md-6 col-lg-4 mb-4 mb-1g-0" data-aos="fade"</pre>
data-aos-delay="">
                   <a class="block-2-item" @if($p-
>idCategory!=1)href="{{asset('/')}}shopByCategory/{{$p->idCategory}}"> @endif
                       @if($p->idCategory==1)href="{{asset('/')}}shopClothes"> @endif
```

```
<figure class="image">
                           <img src="{{asset('/')}}images/{{$p->imageCategory}}"
alt="{{$p->name}}" class="img-fluid">
                       </figure>
                       <div class="text">
                           <span class="text-uppercase">Collections</span>
                           <h3>{ {$p->name}} </h3>
                       </div>
                   </a>
               </div>
               @endforeach
           </div>
       </div>
   </div>
@endsection
@section('ourOffer')
   @include('partial.ourOffer')
@endsection
@section('featureProducts')
   <div class="site-section block-3 site-blocks-2 bg-light">
       <div class="container">
           <div class="row justify-content-center">
               <div class="col-md-7 site-section-heading text-center pt-4">
                   <h2>Featured Products</h2>
               </div>
           </div>
           <div class="row">
               <div class="col-md-12">
                   <div class="nonloop-block-3 owl-carousel">
                       @foreach($product as $p)
                           <div class="item">
                               <div class="block-4 text-center">
                                   <figure class="block-4-image">
                                      <img src="{{asset('/')}}images/{{$p->image}}"
alt="{{$p->alt}}" class="img-fluid">
                                   </figure>
                                   <div class="block-4-text p-4">
                                      <h3><a href="#">{{$p->nameProduct}}</a></h3>
                                       Finding perfect products
                                      {{$p-
>articlePrice} } $
                                   </div>
                               </div>
                           </div>
                       @endforeach
                   </div>
               </div>
           </div>
       </div>
    </div>
```

@endsection

```
Updateuser.blade.php
@extends('layouts.layout')
@section('mid')
   <div class="bg-light py-3">
        <div class="container">
           <div class="row">
               <div class="col-md-12 mb-0"><a href="{{asset('/')}}}">Home</a> <span
class="mx-2 mb-0">/</span> <strong class="text-black">Update your private
data</strong></div>
           </div>
        </div>
    </div>
    <div class="site-section">
        <div class="container">
   @isset($errors)
       @foreach($errors->all() as $greska)
                {{ $greska }}
@endforeach
       <br/><br/>
   @endisset
 <form action="{{route('updatemyacc' , ['id' =>$user->idUser])}}" method="post">
       @method('put')
        <div class="form-group">
           <label>Name</label>
           <input type="text" class="form-control" id="name" value="{{$user-</pre>
>userName} } " placeholder="Name" name="name">
        <div class="form-group">
            <label>Surname</label>
            <input type="text" class="form-control" id="surname" value="{{$user-</pre>
>surname}}" placeholder="Surname" name="surname">
        </div>
        <div class="form-group">
           <label for="exampleInputEmail1">Email address</label>
           <input type="email" class="form-control" id="exampleInputEmail1"</pre>
value="{{$user->email}}" aria-describedby="emailHelp" placeholder="Enter email"
name="email">
           <small id="emailHelp" class="form-text text-muted">We'll never share your
email with anyone else.</small>
        </div>
       <div class="form-group">
           <label for="exampleInputPassword1">Password</label>
            <input type="password" class="form-control" id="exampleInputPassword1"</pre>
value="{{$user->password}}" placeholder="Password" name="password">
        </div>
        <div class="form-group">
           <label>Adress</label>
           <input type="text" class="form-control" id="adress" value="{{$user-</pre>
>address}}" placeholder="Adress" name="adress">
        </div>
        <div class="form-group">
           <label>Mobile</label>
            <input type="text" class="form-control" id="mobile" value="{{$user-</pre>
>mobileFone}}" placeholder="mobile fone" name="mobile">
       </div>
```

```
<div class="form-group">
          <label for="sel1">Select list:</label>
          <select class="form-control" name="activ" id="sel1">
             <option value="0" @if($user->active==0) selected @endif> NOT active
user</option>
             <option value="1" @if($user->active==1) selected @endif> active
user</option>
          </select>
      </div>
      <button type="submit" class="btn btn-primary"</pre>
name="btnupdateuser">Update</button>
   </form>
      </div>
@endsection
Uscecard.blade.php
@extends('layouts.layout')
@section('title') Contact @endsection
@section('mid')
<div class="bg-light py-3">
      <div class="container">
          <div class="row">
             <div class="col-md-12 mb-0"><a href="{{asset('/')}}">Home</a> <span
class="mx-2 mb-0">/</span> <strong class="text-black">User finished
carts</strong></div>
          </div>
      </div>
   </div>
   <div class="site-section">
      <div class="container">
          <div class="row mb-5">
             <div> <a href="{{asset('/')}}updateformuser/{{$id}}"> Update your
oersonal data</a></div>
             <form class="col-md-12" method="post">
                 <div class="site-blocks-table">
                    <thead>
                       <tr>
                           Image
                           Product
                           Price
                           Quantity
                           Total
                       </tr>
                        </thead>
```

```
@if(!$exist)
                              <a href="{{asset('/')}}shopAll"</p>
>You have never bought our profucts. go to shop and by something.</a> 
                         @endif
                         @if($exist)
                                @foreach($productsUser as $p)
                                    <img src="{{asset('/')}} images/{{$p-
>image}}" alt="{{$p->alt}}" class="img-milica">
                                        <h2 class="h5 text-black">{{$p-
>nameProduct} </h2>
                                        ${{$p->articlePrice}}
                                        >
                                           <div class="input-group mb-3"
style="max-width: 120px;">
                                               <input type="text" class="form-</pre>
control text-center " name="sum" id="sum" value="{{$p->sum}}" placeholder="" aria-
label="Example text with button addon" aria-describedby="button-addon1" readonly>
                                           </div>
                                        ${{$p->articlePrice * $p->sum}}
                                    @endforeach
                         @endif
                         </div>
              </form>
          </div>
          @if($exist)
          <div class="row" data-aos="fade-up">
              {{ $productsUser->links() }}
 </div>
              <div class="row mb-5">
                  <div class="col-md-6 pl-5">
                     <div class="row justify-content-end">
                         <div class="col-md-5">
                             <div class="row">
                                <div class="col-md-12 text-right border-bottom mb-</pre>
5">
                                    <h3 class="text-black h4 text-uppercase">good
total lost</h3>
                                </div>
                             </div>
                             <div class="row mb-3">
                                <div class="col-md-6">
                                    <span class="text-black">Your total lost
money</span>
                                </div>
```

```
<div class="col-md-6 text-right">
                                 <strong class="text-black">
                                    @if($exist)
                                      ${{$totalPriceUserEndCard-
>total price}}
                                    @endif
                                 </strong>
                              </div>
                          </div>
                       </div>
                    </div>
                </div>
             </div>
          @endif
</div>
   </div>
@endsection
Resources/views/pages/admin
Adminpanel.blade.php
@extends('layouts.adminlayout')
@section('midadmin')
<div class="table-responsive-sm">
      <div> <img src="{{asset('/')}}/images/milica.jpg" class="figure-img"/>
      <q>
          Moje ime je Milica Ivancic, student sam Visoke ICT skole, treca godina
internet tehnologija.
          Za ovaj sajt je koriscen, jquery, php(Laravel), bootstrup, html, css
      </p>
      </div>
      <thead>
          <tr>
             idActivity
             user name
             email
             activity
          </tr>
          </thead>
          @foreach($activity as $u)
             >
                { $u->id } { /td>
                <td>{ \{ $u->name \} } 
                { $u->email } } 
                {td>{{$u->activiti}}
```

```
@endforeach
           <div class="row" data-aos="fade-up">
           {{ $activity->links() }}
</div>
   </div>
   @endsection
Insertmenu.blade.php
@extends('layouts.adminlayout')
@section('midadmin')
   @isset($errors)
       @foreach($errors->all() as $greska)
               {{ $greska }}
@endforeach
       </ul>
       <br/><br/>
   @endisset
   <form action="{{route('adminmenu.store')}}" method="post" enctype="multipart/form-
data">
       @csrf
       <div class="form-group">
           <label>href</label>
          <input type="text" class="form-control" id="href" placeholder="href"</pre>
name="href">
       </div>
       <div class="form-group">
           <label>name menu</label>
           <input type="text" class="form-control" id="name" placeholder="Name"</pre>
name="name">
       </div>
       <div><button type="submit" class="btn btn-primary" name="insertmenu">insert
menu</button> </div>
   </form>
@endsection
Insertproduct.blade.php
@extends('layouts.adminlayout')
@section('midadmin')
```

```
@isset($errors)
       @foreach($errors->all() as $greska)
                {{ $greska }}
@endforeach
       <br/><br/><br/>
   @endisset
   <form action="{{route('adminproduct.store')}}" method="post"
enctype="multipart/form-data">
       @csrf
       <div class="form-group">
           <label>Name Product</label>
           <input type="text" class="form-control" id="name" placeholder="Name"</pre>
name="name">
       </div>
       <!-- Ubaci fajl -->
       <label>Image</label>
       <input type="file" name="image" class="form-control"/>
       <div class="form-group">
           <label for="comment">Description:</label>
           <textarea class="form-control" name="description" rows="5"</pre>
id="comment"></textarea>
       </div>
       <div class="form-group">
           <label for="exampleInputPassword1">price</label>
           <input type="text" class="form-control" placeholder="price" name="price">
       </div>
       <!--Iscitati kategorije-->
       <div class="form-group">
           <label for="sel1">Select category:</label>
           <select class="form-control" name="category" id="sel1">
               @foreach($category as $c)
                   @if($c->name!='clothes')
               <option value="{\{\$c->idCategory\}}" >{\{\$c->name\}}
                   @endif
               @endforeach
           </select>
       </div>
       <!--Iscitati velicine-->
       <label>Select available size</label>
           @foreach($size as $s)
               <div class="checkbox">
                   <label><input type="checkbox" id="{{$s->idSize}}" name="size[]"
value="{{$s->idSize}}">{{$s->nameSize}}</label>
               </div>
               @endforeach
```

```
<div><button type="submit" class="btn btn-primary"</pre>
name="btnInsertProduct">Insert User</button> </div>
    </form>
@endsection
Insertuser.blade.php
@extends('layouts.adminlayout')
@section('midadmin')
           @isset($errors)
                @foreach($errors->all() as $greska)
                        {{ $greska}
@endforeach
                <br/><br/><br/>
            @endisset
            <form action="{{route('adminuser.store')}}" method="post">
                <div class="form-group">
                   <label>Name</label>
                    <input type="text" class="form-control" id="name"</pre>
placeholder="Name" name="name">
                </div>
                <div class="form-group">
                    <label>Surname</label>
                    <input type="text" class="form-control" id="surname"</pre>
placeholder="Surname" name="surname">
                </div>
                <div class="form-group">
                    <label for="exampleInputEmail1">Email address</label>
                    <input type="email" class="form-control" id="exampleInputEmail1"</pre>
aria-describedby="emailHelp" placeholder="Enter email" name="email">
                   <small id="emailHelp" class="form-text text-muted">We'll never
share your email with anyone else.</small>
                </div>
                <div class="form-group">
                    <label for="exampleInputPassword1">Password</label>
                   <input type="password" class="form-control"</pre>
id="exampleInputPassword1" placeholder="Password" name="password">
                </div>
                <div class="form-group">
                    <label>Adress</label>
                    <input type="text" class="form-control" id="adress"</pre>
placeholder="Adress" name="adress">
                </div>
                <div class="form-group">
                   <label>Mobile</label>
                   <input type="text" class="form-control" id="mobile"</pre>
placeholder="mobile fone" name="mobile">
               </div>
                <button type="submit" class="btn btn-primary"</pre>
name="btnregister">Insert User</button>
```

@endsection

Menu.blade.php

```
@extends('layouts.adminlayout')
@section('midadmin')
   <div> <a href="{{route('adminmenu.create')}}"> Insert menu </a></div>
   <div class="table-responsive-sm">
      <thead>
         >
            idMenu
            href
            menu name
            updatee
            delete
         </tr>
         </thead>
         @foreach($menu as $u)
            >
               { $u->idMenu } } 
               { $u -> href } } 
               { { $u->menuName } } 
                <a href="{{route('adminmenu.edit' , ['adminuser' =>$u-
>idMenu])}}">
                     <i class="material-icons">update</i>
                  </a>
               </td>
               <td>
                  <a href="#" >
                     <i class="material-icons deleteMenu" data="{{$u-</pre>
>idMenu}}"> delete forever</i>
                  </a>
               </td>
            </tr>
         @endforeach
         <div class="row" data-aos="fade-up">
         {{ $menu->links() }}
     </div>
   </div>
@endsection
@section("scripts")
```

```
<script src="{{asset('/')}}js/jquery-3.3.1.min.js"></script>
   <script src="{{asset('/')}}js/jquery-ui.js"></script>
  <script src="{{asset('/')}}js/deletemenu.js"></script>
@endsection
Product.blade.php
@extends('layouts.adminlayout')
@section('midadmin')
  <div> <a href="{{route('adminproduct.create')}}"> Insert Product </a></div>
   <div class="table-responsive-sm">
      <thead>
        <tr>
           idProduct
           name
           image
           description
           start date of production
            price 
           category
            update 
           delete
        </thead>
        @foreach($products as $u)
           >
              { $u->idProduct } } 
              { {$u->nameProduct} } 
               <img src="{{asset('/')}}}images/{{$u->image}}" alt="{{$u-
>alt}}" class="figure-img"> 
              { { $u->description} } 
              { $u->date } } 
              ${ {$u->articlePrice}} 
              <td>{ \{ $u->name \} } 
               <a href="{{route('adminproduct.edit' , ['adminuser' =>$u-
>idProduct])}}">
                    <i class="material-icons">update</i>
                  </a>
              >
                 <a href="#" >
                    <i class="material-icons deleteProduct" data="{{$u-</pre>
>idProduct}}"> delete forever</i>
                 </a>
              @endforeach
```

```
<div class="row" data-aos="fade-up">
           {{ $products->links() }}
       </div>
   </div>
@endsection
@section("scripts")
  <script src="{{asset('/')}}js/jquery-3.3.1.min.js"></script>
   <script src="{{asset('/')}}js/jquery-ui.js"></script>
   <script src="{{asset('/')}}js/deleteproduct.js"></script>
@endsection
Updatemenu.blade.php
@extends('layouts.adminlayout')
@section('midadmin')
   @isset($errors)
       @foreach($errors->all() as $greska)
               {{ $greska }}
@endforeach
       <br/><br/>
   <form action="{{route('adminmenu.update' , ['adminuser' =>$menu->idMenu] )}}"
method="post" enctype="multipart/form-data">
       @csrf
       @method('put')
       <div class="form-group">
           <label>href</label>
           <input type="text" class="form-control" id="href" value="{{$menu-</pre>
>href}}" placeholder="href" name="href">
       </div>
       <div class="form-group">
           <label>name menu</label>
           <input type="text" class="form-control" id="name" placeholder="Name"</pre>
value="{{$menu->menuName}}" name="name">
       </div>
       <div><button type="submit" class="btn btn-primary" name="insertmenu">update
menu</button> </div>
   </form>
```

Updateproduct.blade.php

```
@extends('layouts.adminlayout')
@section('midadmin')
  @isset($errors)
       @foreach($errors->all() as $greska)
               {{    $greska }}
@endforeach
       <br/><br/>
   @endisset
   <form action="{{route('adminproduct.update' , ['adminuser' =>$p->idProduct])}}"
method="post" enctype="multipart/form-data">
       @method('put')
       <div class="form-group">
          <label>Name Product</label>
          <input type="text" class="form-control" id="name" value="{{$p-</pre>
>nameProduct}}" placeholder="Name" name="name">
       </div>
       <!-- Ubaci fajl -->
       <label>Image</label>
       <lable> If you don't thing to update image make sure that file is empty
</lable>
       <input type="file" name="image" class="form-control"/>
       <div class="form-group">
          <label for="comment">Description:</label>
          <textarea class="form-control" name="description" rows="5"</pre>
id="comment">{ { $p->description} } </textarea>
       </div>
       <div><button type="submit" class="btn btn-primary"</pre>
name="btnupdateProduct">update product</button> </div>
   </form>
@endsection
Updateuser.blade.php
@extends('layouts.adminlayout')
@section('midadmin')
   @isset($errors)
       @foreach($errors->all() as $greska)
               {{     $greska }}
```

```
@endforeach
        <br/>
<br/>
<br/>
    @endisset
    <form action="{{route('adminuser.update' , ['adminuser' =>$user->idUser])}}"
method="post">
        @csrf
        @method('put')
        <div class="form-group">
            <label>Name</label>
            <input type="text" class="form-control" id="name" value="{{$user-</pre>
>userName} } " placeholder="Name" name="name">
        </div>
        <div class="form-group">
            <label>Surname</label>
            <input type="text" class="form-control" id="surname" value="{{$user-</pre>
>surname}}" placeholder="Surname" name="surname">
        </div>
        <div class="form-group">
            <label for="exampleInputEmail1">Email address</label>
            <input type="email" class="form-control" id="exampleInputEmail1"</pre>
value="{{$user->email}}" aria-describedby="emailHelp" placeholder="Enter email"
name="email">
            <small id="emailHelp" class="form-text text-muted">We'll never share your
email with anyone else.</small>
        </div>
        <div class="form-group">
            <label for="exampleInputPassword1">Password</label>
            <input type="password" class="form-control" id="exampleInputPassword1"</pre>
value="{{$user->password}}" placeholder="Password" name="password">
        </div>
        <div class="form-group">
            <label>Adress</label>
            <input type="text" class="form-control" id="adress" value="
{{$user-</pre>
>address}}" placeholder="Adress" name="adress">
        </div>
        <div class="form-group">
            <label>Mobile</label>
            <input type="text" class="form-control" id="mobile" value="{{$user-</pre>
>mobileFone}}" placeholder="mobile fone" name="mobile">
        </div>
        <div class="form-group">
            <label for="sel1">Select list:</label>
            <select class="form-control" name="activ" id="sel1">
                <option value="0" @if($user->active==0) selected @endif> NOT active
user</option>
                <option value="1" @if($user->active==1) selected @endif> active
user</option>
            </select>
        </div>
        <button type="submit" class="btn btn-primary"</pre>
name="btnupdateuser">Update</button>
    </form>
```

Users.blade.php

```
@extends('layouts.adminlayout')
@section('midadmin')
  <div> <a href="{{route('adminuser.create')}}"> Insert User </a></div>
  <div class="table-responsive-sm">
     <thead>
        <tr>
           idUser
           First name
           Surname
           e-mail
           idRole
           active
           address
           mobilephone
           update
           delete
        </thead>
        @foreach($users as $u)
        <tr>
           { $u->idUser } } 
           { $u->userName } } 
           { $u->surname } } 
           { { $u->email } } 
           { { $u->idRole } } 
           { { $u->active } } 
           { $u->address } } 
           {td>{{$u->mobileFone}}
            <a href="{{route('adminuser.edit' , ['adminuser' =>$u-
>idUser])}}">
                 <i class="material-icons">update</i>
              </a>
           >
              <form action="{{route('adminuser.destroy' , ['adminuser' =>$u-
>idUser])} " method="POST">
                 <input type="hidden" name=" method" value="DELETE">
                 <input type="hidden" name="_token" value="{{ csrf_token() }}">
                 <button class="btn btn-primary btn-lg py-3 "><i</pre>
class="material-icons">delete forever</i></button>
              </form>
           </tr>
        @endforeach
        </div>
```

@endsection