

Clustering of common structured RNA domains by aligning basepair probabilities

Stefan E Seemann^{1,2}, Martin A Smith¹

¹*Garvan Institute of Medical Research, 384 Victoria Street, Sydney, NSW, Australia*

²*University of Copenhagen, Groennegaardsvej 3, Frederiksberg, Denmark*
seemann@rth.dk

Keywords: RNA secondary structure, Basepair probability, Structure-based alignment

Abstract: RNA molecules often function by their RNA secondary structure. Many short RNAs have characteristic global structures, such as the two sequential stem-loop structures of HACA snoRNAs. Long noncoding RNAs (lncRNAs) have important local structured RNA domains that are, for instance, recognized by RNA binding proteins. The discovery of functional RNA domains demands fast and accurate clustering approaches that are based on the structure landscape of RNA sequences. The gold standard of comparative RNA analysis, namely Sankoff-style simultaneous alignment and folding, is, however, not applicable. Here, we present a novel algorithm for RNA structure alignments that we named *DotAligner*. The presented method optimizes the alignment of two RNA sequences with respect to all possible structures simultaneously, which allows the alignment of similar structured RNA domains of low sequence similarity. The generated dissimilarity matrices are used to cluster RNA sequences in common structured RNA domains. The method was successfully tested on a selected set of HACA-box snoRNAs. It can contribute to the detection of functional RNA domains through its speed and very high specificity.

1 INTRODUCTION

The structure of RNA molecules is an essential functional criteria of many non-coding RNAs (ncRNAs), such as the stem-loop of microRNAs and the double stem-loop RNA motifs of the HOTAIR long ncRNA (Gupta et al., 2010). ncRNAs can be divided in RNA families of similar inherent functionality, structures, or composition. The largest collection of RNA families is the Rfam database with 2,208 families in its version 11.0 (Burge et al., 2013). However, high-throughput sequencing continuously uncovers novel non-coding RNA transcripts and genome-wide RNA structure predictions have revealed hundreds of thousands putative conserved RNA secondary structures. We hypothesize that the RNA secondary structure is the scaffold for intermolecular interactions of many ncRNA-driven regulatory pathways. Protein binding domains of RNA molecules may evolve totally independent from sequence and, instead, may be solely determined by structure. It has been shown that if the sequence similarity falls below 60% sequence comparison will not find anymore domain similarities that are based on structure (Gardner et al., 2005). In addition, competing structures and suboptimal structures

may support or even drive the functionality of an RNA domain. Hence, methods are needed that find structural similarity independent from sequence conservation and freed from one single optimal RNA secondary structure.

For clustering of RNA domains a dissimilarity measurement of all pairs of query structures is needed. The dissimilarity is described through a pairwise weighted string alignment with arbitrary pairwise dependencies (for base pairings). The Needleman-Wunsch (2) algorithm solves the maximum weight string alignment problem by dynamic programming in $O(n^2)$ by preserving the sequence order and maximizing the similarity. The consideration of pairs of nucleotides in each sequence that form intra-molecular interactions extends the problem to pairwise dependencies among positions in each string. This problem variant is MAX-SNP-hard. However, the problem can be attacked by intelligent heuristics that avoid the examination of all possible aligning states.

Simultaneous alignment and folding (Sankoff, 1985) is the acknowledged gold standard to predict the consensus structure and alignment of a set of related RNA sequences. Because the Sankoff algorithm

is practically not applicable, the pre-calculation of the structure ensemble of each sequence, *e.g.* basepair probabilities in thermodynamically equilibrated RNA structure ensembles (McCaskill, 1990), is used by different methods to speed up the calculation of structure-based alignments. The programs `pmcomp` for pairwise and `pmmulti` for multiple alignments (Hofacker et al., 2004), as well as `LocaRNA` (Will et al., 2007) score the alignment based on the notion of a common secondary structure. Despite of the usage of the basepair probability matrices extracted these methods the maximum-weight common secondary structure but do not explicitly consider suboptimal structures in the alignment. The pairwise alignment of basepair probability matrices (dot plots) has been first introduced by `CARNA` (Palù et al., 2010; Sorescu et al., 2012). `CARNA` finds iteratively better alignments with an effective constraint programming technique using a branch and bound scheme (propagator).

Beside of `LocaRNA` and a method based on directed acyclic graph kernels (Sato et al., 2008), the alignment-free approach `ClustGraph` (Heyne et al., 2012) has been used to cluster RNA structure in common domains. Here, we propose an alternative heuristic for the pairwise weighted string alignment with arbitrary pairwise dependencies that can deliver dissimilarity scores of dot plots in time close to an Needleman-Wunsch alignment which makes the approach applicable for clustering of large numbers of putative RNA domains.

2 IMPLEMENTATION

The proposed algorithm makes the computationally complex problem of aligning two dotplots available by the iteration through a two step approach: (1) find dissimilarity (distance) of basepair probabilities of each nucleotide in sequence S_a to each nucleotide in sequence S_b ; and (2) find best path through the distance matrix generated in 1. The iteration is stopped when no more gaps are introduced in step 2. This algorithm runs in $O(n^2)$, hence, in the same time complexity as the sequence-based alignments. In the following we discuss in more detail how the algorithm works.

As described in (Palù et al., 2010) the weight Z of alignment A of two arc-annotated sequences (S_a, P_a) and (S_b, P_b) is defined by

$$Z(A) = \sum_{(i,i') \in A} \sigma(i,i') + \sum_{\substack{(i,j) \in P_a, \\ (i',j') \in P_b, \\ (i,i') \in A, (j,j') \in A}} \tau(i,j,i',j') + \gamma \times L, \quad (1)$$

where S is a sequence and P is a base pairing probability matrix, $\sigma(i,i')$ is the similarity of sequence positions $S_a[i]$ and $S_b[i']$, $\tau(i,j,i',j')$ is the similarity of arcs $(i,j) \in P_a$ and $(i',j') \in P_b$ ($\tau(i,j,i',j') = 1 - |P_a(i,j) - P_b(i',j')|$), and γ is the gap cost associated with each sequence position that is not matched ($L = |S_a| + |S_b| - 2|A|$). The alignment problem finds the maximal $Z(A)$. As its solution is MAX-SNP-hard we implemented a heuristic of the alignment problem in `DotAligner` which is summarized in the following pseudocode:

Pseudocode

Get Alignment A of the two dotplots P_a and P_b

Require: (S_a, P_a) of length N , (S_b, P_b) of length M
repeat

{STEP 1: global alignment of pairing probabilities of each base in S_a and S_b }

for $i = 1$ to N **do**

for $i' = 1$ to M **do**

$$Z(A|i,i') = \alpha \times \sigma(i,i') + \beta \times \sum_{k=1}^N \sum_{l=1}^M \tau(i,k,i',l) + \gamma \times L \quad (2)$$

end for

end for

{STEP 2: local alignment of pairwise weights $Z(A|i,i')$ }

for $i = 1$ to N **do**

for $j = 1$ to M **do**

$$D_{ij} = \max \begin{cases} 0 \\ D_{i-1,j} + \gamma \\ D_{i-1,j-1} + Z(A|i-1,j-1) \\ D_{i,j-1} + \gamma \end{cases} \quad (3)$$

end for

end for

$A(S_a, S_b) = \text{BACKTRACKING}(D)$

Remove gaps in $A(S_a, S_b)$ from (S_a, P_a) and (S_b, P_b)

until gaps in $A(S_a, S_b) == 0$

In step 1 we calculate weights $Z(A|i,i')$ as defined in equation 2 for all combinations of fixed positions i in sequence S_a and i' in sequence S_b . The only difference between equations 2 and 1 is the fixation of i and i' , and the introduction of the weighting pa-

rameters for sequence conservation (α) and for structure conservation (β , normally set to 1) which will be needed later. Thus, we globally align two vectors of probabilities instead of two matrices which can be done by the Needleman-Wunsch algorithm. The actual alignments aren't needed any longer. In step 2 we locally align the weights $Z(A|i, i')$ from step 1 by Smith-Waterman algorithm, see equation 3, where the weights $Z(A|i, i')$ are used as the matching scores. Both steps are repeated until no more gaps are introduced in step 2, thus, the same nucleotides in S_a and S_b are aligned in the last two iterations. Then the final dissimilarity of the two dotplots is calculated by

$$\begin{aligned} dist &= 1 - Z(A) \\ &= 1 - \frac{1}{|A|} \left(\sum_{(i, i') \in A} Z(A|i, i', \gamma = 0) + \gamma \times L \right) \end{aligned} \quad (4)$$

where $Z(A|i, i', \gamma = 0)$ is equal to equation 2 without the gap term, and $L = |S_a| + |S_b| - 2|A|$.

The robustness of the alignments can be improved by replacing $P(i, i')$ with

$$\Psi_{i, i'} = \log \frac{P(i, i')}{p_0} / \log \frac{1}{p_0} \quad (5)$$

where p_0 is the expected probability for a pairing to occur at random (use ribosomal basepair substitution matrix from Pfold (Knudsen and Hein, 2003)). Ψ was firstly introduced in (Will et al., 2007). The term $\log \frac{P(i, i')}{p_0}$ is the log-odds score for having a specific base pairing against the null model of a random pairing, and $\log \frac{1}{p_0}$ is a normalization factor that transforms the scores to a maximum of 1. $P == 1$ results in $\Psi = 1$, $P > p_0$ results in $\Psi > 0$, $P == p_0$ results in $\Psi = 0$, and $P < p_0$ results in $\Psi < 0$. This transformation gives larger dissimilarities if low basepair probabilities are involved, but relatively lower dissimilarities if two high basepair probabilities are compared.

The proposed algorithm can be optimized by different adaptations which will be evaluated in the result section:

1. weight of sequence similarity (optimize α)
2. gap costs (optimize γ)
3. affine gap costs to differentiate between opening and extending gaps. This term is especially important for the global alignment in step 1 where we want to prefer long gaps when sequences of different lengths are aligned.
4. higher gap costs in highly probable basepair stacks

3 RESULTS

The accuracy of the proposed algorithm is assessed using the specificity (SP) and the sensitivity (SN), which are defined as follows:

$$SP = \frac{TN}{TN + FP}, \quad SN = \frac{TP}{TP + FN} \quad (6)$$

where TP is the number of correctly predicted positives, FP is the number of incorrectly predicted positives, TN is the number of correctly predicted negatives, and FN is the number of incorrectly predicted negatives. Furthermore, the area under the receiver operating characteristic (ROC) curve was used to optimize α , γ , and affine gap costs. The ROC curve plots the true positive rates (SN) as a function of the false positive rates (1 - SP) for varying parameters.

As benchmark data set we selected 300 sequences of 10 H/ACA-box snoRNA families from Rfam version 11.0 seed alignments with average pairwise sequence identity (APSI) $< 90\%$ and sequence lengths of $> 130\text{bp}$ and $< 140\text{bp}$: *SNORA1*, *SNORA13*, *SNORA14*, *SNORA15*, *SNORA16*, *SNORA17*, *SNORA18*, *SNORA19*, *SNORA2*, *SNORA22*. We chose only sequences of similar length because step 1 of DotAligner performs global alignments.

Martins benchmark for different APSIs. Compare with reference alignments by the SPS measure introduced in Bralibase 2.1 (see CARNA paper). Compare Rfam families with significant clusters generated by pvclust.

3.1 Parameter optimization

We tried gap costs γ of 3, 4, 5 and 6, which are used unweighted in step 1 of the algorithm (equation 2) and weighted in step 2 of DotAligner (equation 3) by the factor

$$\frac{1}{N \times M} \sum_{i=1}^N \sum_{i'=1}^M Z(A|i, i') \quad (7)$$

where N and M are lengths of S_a and S_b , respectively. The ROC curve in Figure 1 shows the lowest γ as most sensitive ($SN = 0.61$) and the highest γ as most specific ($SP = 1.0$) for correctly clustering the selected Rfam families. In the following we choose $\gamma = 4$, whereas the optimal gap cost lies somewhere between 3 and 4.

3.2 Comparison with other methods

We compare DotAligner with sequence alignments (in-house implementation of Needleman-Wunsch algorithm with the blastn parameters `match = 2`, `mis-`

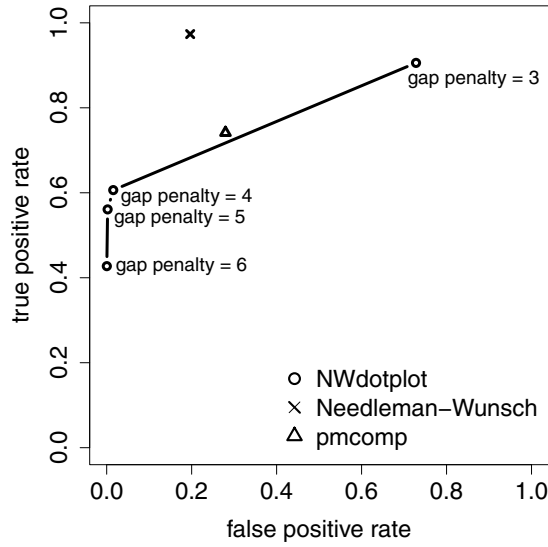


Figure 1: Performance comparison of hierarchical cluster analysis: Degree of agreement between the 10 tested Rfam families and the automated clustering based on distance scores from DotAligner with different gap penalties, Needleman-Wunsch algorithm and pmcomp.

match = -3 and gap penalty = 5 which are optimized for sequence identity of 90%) and the structure alignment tools pmcomp (using default parameters or larger values for parameter $-D$ if the length difference of two sequences is > 5 bp), CARNA, and LocaRNA. Figure 1 shows that the sequence aligner (SP = 0.80, SN = 0.97) performs very well on our benchmark set with a very high sensitivity which is most likely due to the fact that the input sequences have some degree of sequence information. pmcomp (SP = 0.72, SN = 0.74) performed with a medium sensitivity and specificity. With DotAligner we are able to find very well defined clusters (SP = 0.99), however, at the cost of sensitivity (SN = 0.61), see Figure 2.

3.3 Clustering methodology

The reliability of our pairwise structure alignment algorithm at clustering homologous RNA structures was tested on a curated database of RNA structure families (cf RFAM). This enables both qualitative and quantitative performance evaluation using a gold-standard reference. We compared DotAligner to other RNA structure alignment and clustering tools using the following framework:

1. Generate dissimilarity matrix dM_A from $\frac{n(n-1)}{2}$ pairwise structure comparisons with each algorithm
2. Hierarchical clustering of RNA secondary structures and significance testing with pvclust

(Suzuki R and Shimodaira H. Bioinformatics 2006).

3. Generate dissimilarity matrix dM_R from scoring metric of (1.) from curated RFAM alignments (constrained alignment).
4. Calculate the correlation coefficient between dM_A and dM_R using the Mantel correlation statistic (the cross-product between the standardised distances).

Benchmarking was performed on both complete RNA structures (global alignment) and randomly selected subsequences (local alignment) for various RFAM families, as described below.

3.4 Benchmark data generation

xx RNA families were manually selected from the seed alignments of RFAM 11 (REF). *How should we limit the mean pairwise identity? All structures must be within a given range and perform several independent comparisons, i.e. one per SeqID range? Then compare the individual SeqID ranges to a sample of variable SeqIDs (without selection)?*

We employed the BuildRfamBenchmark JAVA program from (Smith M et al. NAR 2013) to generate the sample alignments for the RFAM entries listed in TableXX. The tRNA sample includes special tRNAs, like ser-tRNA with a 5th hairpin to see how the latter gets clustered by the algorithms.

RFAM ID	RNA class	average length
	5s rRNA	
	SRP	
	tRNA	
	HaCa snoRNA	
	pre-miRNA	

3.5 Complete RFAM sequences

Global alignment. More emphasis on quantitative clustering, accuracy, and correlation with control.

3.6 Fragmented RFAM sequences

Local alignment, simulating genomic screens. More emphasis on qualitative clustering

4 DISCUSSION

We plan to integrate the proposed method in a pipeline that screens regions of interest for structured RNA do-

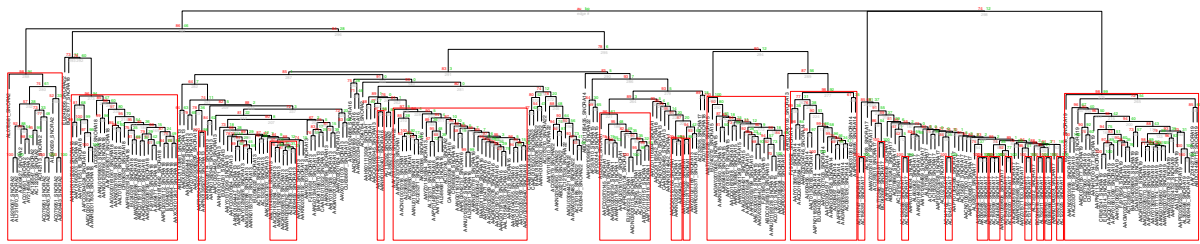


Figure 2: Automated hierarchical clustering of 300 sequences from 10 H/ACA snoRNA families. The dissimilarity matrix was calculated through DotAligner with gap penalty 4. The clustering was conducted by the R-package pvclust with multiscale bootstrap resampling with number of bootstrap 1000. We define clusters (red rectangles) as Approximately Unbiased (AU) p -values > 0.95 rejecting the hypothesis that “the cluster does not exist” with significance level 0.05.

mains in a collection of RNA molecules. The pipeline may comprise window based thermodynamic folding, *e.g.* by RNAplfold (Bernhart et al., 2006), the identification of regions of high intra-molecular binding probabilities, *e.g.* RNAllocal (Dotu et al., 2010), followed by the presented alignment tool DotAligner. The identification of local structural potential is necessary because DotAligner finds only semi-local alignments, meaning the heuristic in the first step of the algorithm gives global alignment, whereas the second step provides a final local alignment.

DotAligner can also be extended for multiple alignments, similar to the strategy implemented in pmmulti (Hofacker et al., 2004), and the generation of phylogenetic trees. This may replace or support the hierarchical clustering approach used here. In addition, both may serve as input for RNA secondary structure predictors, such as PETfold (Seemann et al., 2008) unifying thermodynamic and evolutionary information.

The first step of the algorithm could also implement local alignments. In this case, however, the input basepair probabilities should be calculated in a sliding-window approach, such as provided by RNAplfold. Then step 2 has to find the best local alignment of local pairwise alignments from step 1 where the paired bases are overlapping. The search for overlapping local alignments from step 1 will increase the running time exponentially, but local alignments may improve the boundaries of common structured RNA domains.

ACKNOWLEDGEMENTS

I thank the Carlsberg foundation for my travel grant. Skål!

REFERENCES

- Bernhart, S. H., Hofacker, I. L., and Stadler, P. F. (2006). Local {RNA} base pairing probabilities in large sequences. *Bioinformatics*, 22:614–615.
- Burge, S. W., Daub, J., Eberhardt, R., Tate, J., Barquist, L., Nawrocki, E. P., Eddy, S. R., Gardner, P. P., and Bateman, A. (2013). Rfam 11.0: 10 years of {RNA} families. *Nucleic Acids Res*, 41(Database issue):D226–32.
- Dotu, I., Lorenz, W. A., Van Hentenryck, P., and Clote, P. (2010). {RNA} structural segmentation. *Pac Symp Biocomput*, pages 57–68.
- Gardner, P. P., Wilm, A., and Washietl, S. (2005). A benchmark of multiple sequence alignment programs upon structural {RNAs}. *Nucleic Acids Res*, 33(8):2433–2439.
- Gupta, R. A., Shah, N., Wang, K. C., Kim, J., Horlings, H. M., Wong, D. J., Tsai, M. C., Hung, T., Argani, P., Rinn, J. L., Wang, Y., Brzoska, P., Kong, B., Li, R., West, R. B., van de Vijver, M. J., Sukumar, S., and Chang, H. Y. (2010). Long non-coding {RNA} {HOTAIR} reprograms chromatin state to promote cancer metastasis. *Nature*, 464(7291):1071–1076.
- Heyne, S., Costa, F., Rose, D., and Backofen, R. (2012). GraphClust: alignment-free structural clustering of local {RNA} secondary structures. *Bioinformatics*, 28(12):i224–32.
- Hofacker, I. L., Bernhart, S. H., and Stadler, P. F. (2004). Alignment of {RNA} base pairing probability matrices. *Bioinformatics*, 20(14):2222–2227.
- Knudsen, B. and Hein, J. (2003). {Pfold}: {RNA} secondary structure prediction using stochastic context-free grammars. *Nucleic Acids Research*, 31(13):3423–3428.
- McCaskill, J. S. (1990). The equilibrium partition function and base pair binding probabilities for {RNA} secondary structure. *Biopolymers*, 29(6-7):1105–1119.
- Palù, A., Möhl, M., and Will, S. (2010). A Propagator for Maximum Weight String Alignment with Arbitrary Pairwise Dependencies. In Cohen, D., editor, *Principles and Practice of Constraint Programming CP 2010*, pages 167–175. Lecture no edition.
- Sankoff, D. (1985). Simultaneous solution of the {RNA} folding, alignment and protosequence problems. *SIAM J. Appl. Math.*, 45:810–825.

- Sato, K., Mituyama, T., Asai, K., and Sakakibara, Y. (2008). Directed acyclic graph kernels for structural {RNA} analysis. *BMC Bioinformatics*, 9:318.
- Seemann, S. E., Gorodkin, J., and Backofen, R. (2008). Unifying evolutionary and thermodynamic information for RNA folding of multiple alignments. *Nucleic acids research*, 36(20):6355–62.
- Sorescu, D. A., Möhl, M., Mann, M., Backofen, R., and Will, S. (2012). CARNA—alignment of RNA structure ensembles. *Nucleic acids research*, 40(Web Server issue):W49–53.
- Will, S., Reiche, K., Hofacker, I. L., Stadler, P. F., and Backofen, R. (2007). Inferring noncoding {RNA} families and classes by means of genome-scale structure-based clustering. *PLoS Comput Biol*, 3(4):e65.