

# RAPProject

Mingzhi Ye

2022/10/10

Get the combined distribution of number of Alpha chains and number of Beta chains in a clonotype

```
IndexnAnBMap=read.csv("IndexnAnBMap.csv",header = F)
IndexnAnBMap=as.matrix(IndexnAnBMap)
```

Get a template dataframe of a clonotype which has one alpha chain and one beta chain

```
sce0 <- readRDS('toyTCRdata.rds')
TemplateClonotype=sce0$contigs[[4]][c(2,1),]
```

Generate sample pool

```
poolSize=2000
SampleSize=5000
AminoAcids=c('A','R','N','D','C','Q','E','G','H','I','L','K','M','F','P','S','T','W','Y','V')
getCDR3 <- function(x){

  cdr3=sample(AminoAcids,15, replace=T)
  return(paste(cdr3,collapse = ''))
}

getClonotypeForPool<-function(clonotype_index, CDRAAlpha, CDRBeta){
  result=TemplateClonotype
  result$cdr3[1]=CDRAAlpha
  result$cdr3[2]=CDRBeta
  return(result)
}

getSamplePool <- function(poolSize){
  Alpha_pool=sapply(1:poolSize,getCDR3,simplify = TRUE)
```

```

Beta_pool=sapply(1:poolSize,getCDR3,simplify = TRUE)

CDR_Alpha=sample(Alpha_pool,poolSize, replace=T)
CDR_Beta=sample(Beta_pool,poolSize, replace=T)


barcode <- paste('cell', 1:poolSize)


samplePool <- lapply(1:poolSize, function(clonotype_index){
  getClonotypeForPool(clonotype_index, CDR_Alpha[clonotype_index], CDR_Beta[clonotype_index])
})
samplePool <- SplitDataFrameList(samplePool)
samplePool[, 'barcode'] <- barcode
samplePool[, 'sample'] <- 'sim'
names(samplePool) <- barcode

# sample1<-as(sample, 'SplitDataFrameList')
return(samplePool)
}
samplePool=getSamplePool(poolSize)

```

Generate the dataframe recording the abundance for each clonotype in the sample pool

```

clonotypes_in_pool=samplePool[, 'cdr3']
concatCDR3<-function(x){
  res=paste(x[1],x[2],sep=' ')
  res=paste(x[1],x[2],sep=' ')
  return(res)
}
clonotypes_in_pool=lapply(clonotypes_in_pool,concatCDR3)
clonotypes_in_pool=unlist(clonotypes_in_pool)
abundance=rep(1/poolSize,poolSize)
realDF<- data.frame(clonotypes_in_pool,abundance)
rownames(realDF) <- NULL
realDF=aggregate(realDF$abundance, by=list(clonotype=realDF$clonotypes_in_pool ), FUN=sum)
colnames(realDF) <- c('clonotype','abundance')

```

Functions for generate a sample

```

getClonotype<-function(clonotype_index, numberA, numberB, errorProb = .01){
  result=DataFrame()
  indexInPool=sample.int(poolSize, 3, replace=FALSE)

```

```

setAlpha <- hashset()
setBeta <- hashset()

if (numberA>=1){
  if(runif(1) < errorProb){
    result=rbind(result,samplePool[[indexInPool[2]]][1,])
    insert(setAlpha,indexInPool[2])
  }else{
    result=rbind(result,samplePool[[indexInPool[1]]][1,])
    insert(setAlpha,indexInPool[1])
  }
  numberA=numberA-1
}
if (numberB>=1){
  if(runif(1) < errorProb){
    result=rbind(result,samplePool[[indexInPool[3]]][2,])
    insert(setBeta,indexInPool[3])
  }else{
    result=rbind(result,samplePool[[indexInPool[1]]][2,])
    insert(setBeta,indexInPool[1])
  }

  numberB=numberB-1
}
while(numberA>0){
  indexInPool=sample.int(poolSize, 1, replace=TRUE)
  while(setAlpha[indexInPool]==TRUE){
    indexInPool=sample.int(poolSize, 1, replace=TRUE)
  }
  insert(setAlpha,indexInPool)
  result=rbind(result,samplePool[[indexInPool]][1,])
  numberA=numberA-1
}
while(numberB>0){
  indexInPool=sample.int(poolSize, 1, replace=TRUE)
  while(setBeta[indexInPool]==TRUE){
    indexInPool=sample.int(poolSize, 1, replace=TRUE)
  }
  insert(setBeta,indexInPool)
  result=rbind(result,samplePool[[indexInPool]][2,])
  numberB=numberB-1
}
return(result)
}

```

## Use the functions to generate a sample with size 50

However, function 'clonoStats' is not compatible with SimpleDFrameList, how to transform SimpleDFrameList to CompressedSplitDFrameList

```
getSample <- function(samplesize){
  RandomIntegers <- sample(1:(length(IndexnAnBMap)/2), samplesize, replace=T)

  barcode <- paste('cell', 1:samplesize)

  sample <- lapply(1:samplesize, function(clonotype_index){
    getClonotype(clonotype_index, IndexnAnBMap[RandomIntegers[clonotype_index],1], IndexnAnBMap[RandomIntegers[clonotype_index],2])
  })
  sample <- SplitDataFrameList(sample)
  sample[, 'barcode'] <- barcode
  sample[, 'sample'] <- 'sim'
  names(sample) <- barcode

  # sample1<-as(sample, 'SplitDFrameList')
  return(sample)
}
# samplelist=getSample(SampleSize)
# EMpredicted <- clonoStats(samplelist, method = 'EM')
# UNpredicted <- clonoStats(samplelist, method = 'unique')
```

## Get Variation Distance

```
getDistance_R<-function(clonotype,abundance){
  stimulated<- data.frame(clonotype,abundance)

  sum_abundance=sum(stimulated['abundance'])
  stimulated['abundance']=stimulated['abundance']/sum_abundance

  merged = merge(x = realDF, y = stimulated, by = "clonotype",all = TRUE)
  merged[is.na(merged)] <- 0
  return (sum(abs(merged['abundance.x']-merged['abundance.y'])))
}
```

## Test

```
time0=Sys.time()
samplelist=getSample(5000)
time1=Sys.time()
print(time1-time0)
EMpredicted <- clonoStats(samplelist, method = 'EM')
time2=Sys.time()
```

```

print(time2-time1)
distance1=getDistance_R(clonoNames(EMpredicted),clonoAbundance(EMpredicted)[,1])
time3=Sys.time()
print(time3-time2)
UNpredicted <- clonoStats(samplelist, method = 'unique')
time4=Sys.time()
print(time4-time3)
distance2=getDistance_R(clonoNames(UNpredicted),clonoAbundance(UNpredicted)[,1])
time5=Sys.time()
print(time5-time4)

```

## Calculate distances for samples

```

DistanceListFromEM=c()
DistanceListFromUN=c()
for(i in 1:20){
  samplelist=getSample(SampleSize)
  EMpredicted <- clonoStats(samplelist, method = 'EM')
  distance1=getDistance_R(clonoNames(EMpredicted),clonoAbundance(EMpredicted)[,1])
  DistanceListFromEM[i]=distance1
  UNpredicted <- clonoStats(samplelist, method = 'unique')
  distance2=getDistance_R(clonoNames(UNpredicted),clonoAbundance(UNpredicted)[,1])
  DistanceListFromUN[i]=distance2
}


```

## Visualize

```


boxplot(DistanceListFromEM)

```

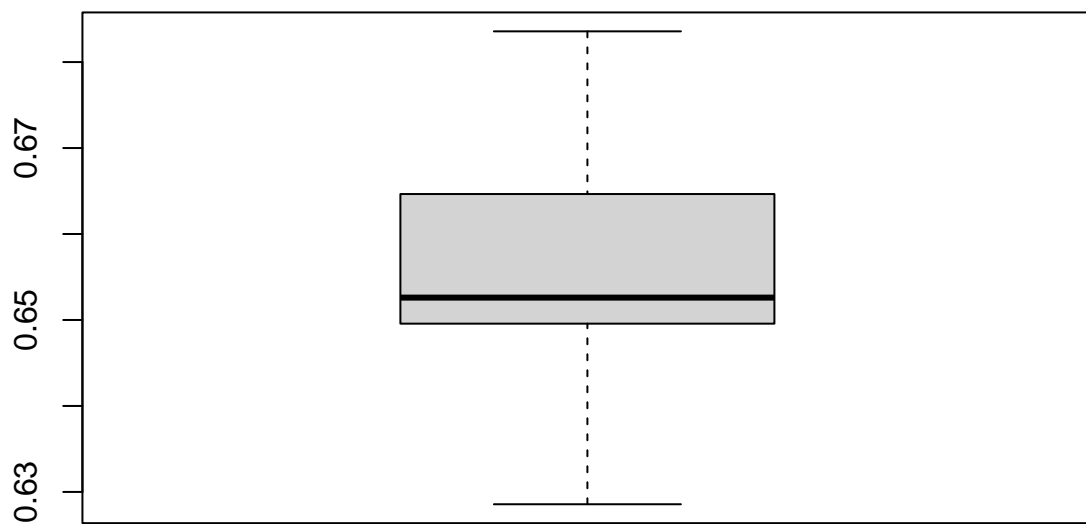


```
hist(DistanceListFromEM)
```

**Histogram of DistanceListFromEM**

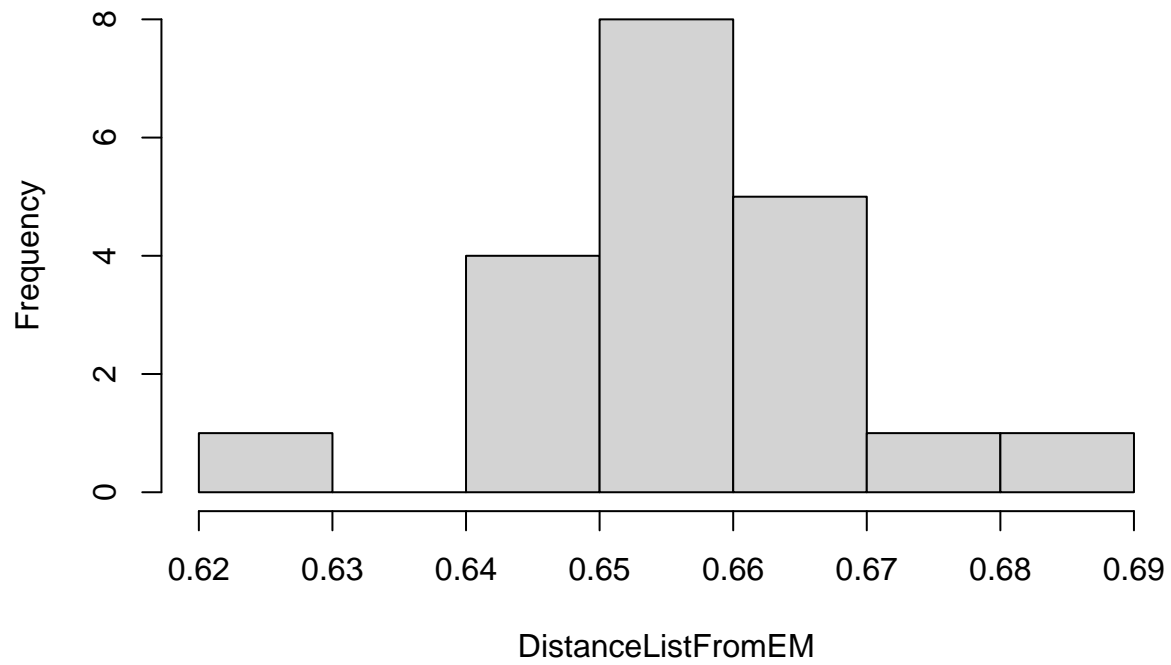


```
boxplot(DistanceListFromUN)
```

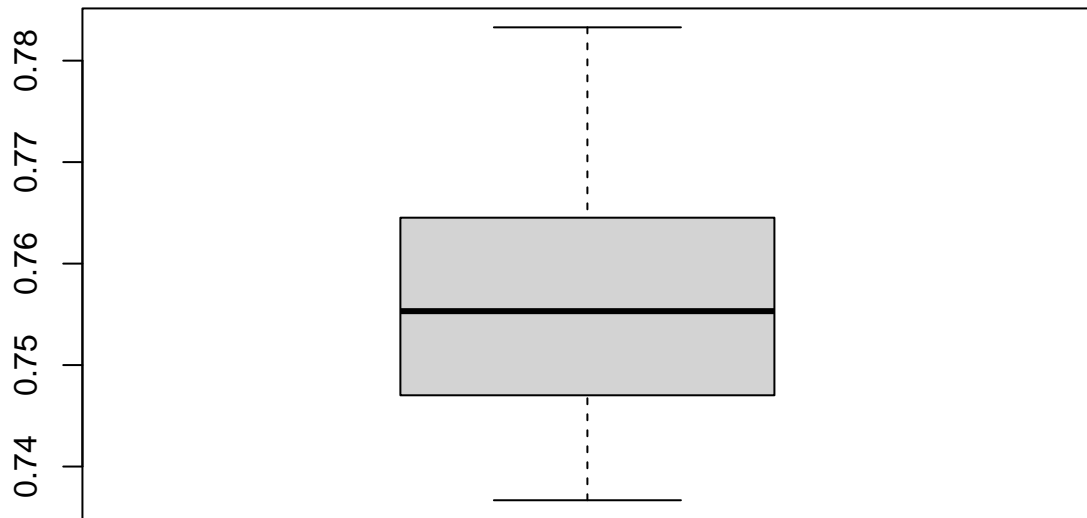

```
hist(DistanceListFromUN)
```



### Histogram of DistanceListFromUN

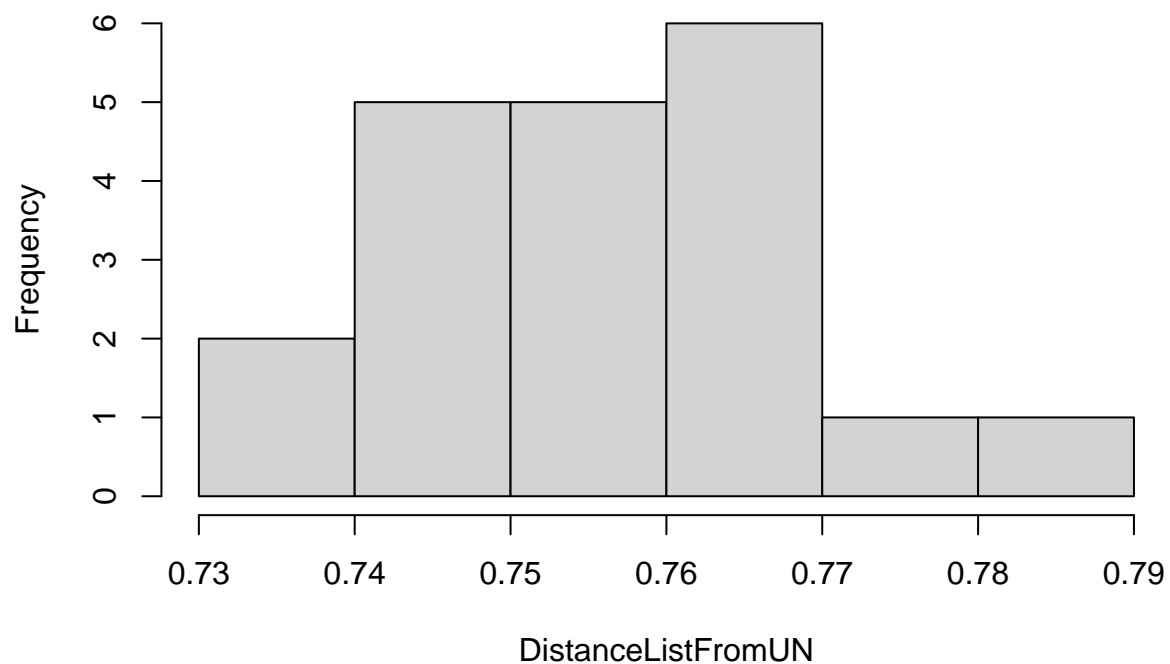

```
print(median(DistanceListFromEM))
```

```
## [1] 0.6526006
```

```
print(median(DistanceListFromUN))
```

```
## [1] 0.7553123
```

```
print(mean(DistanceListFromEM))
```

```
## [1] 0.6563997
```

```
print(mean(DistanceListFromUN))
```

```
## [1] 0.7555607
```