


LAB_09 : Python Create a file with multiple lines.

Use your Linux environment for the following:

1. Use vi editor to create a file that has multiple lines.

```
$ vim example_Q1.txt      : Create 01 file
```

Input :

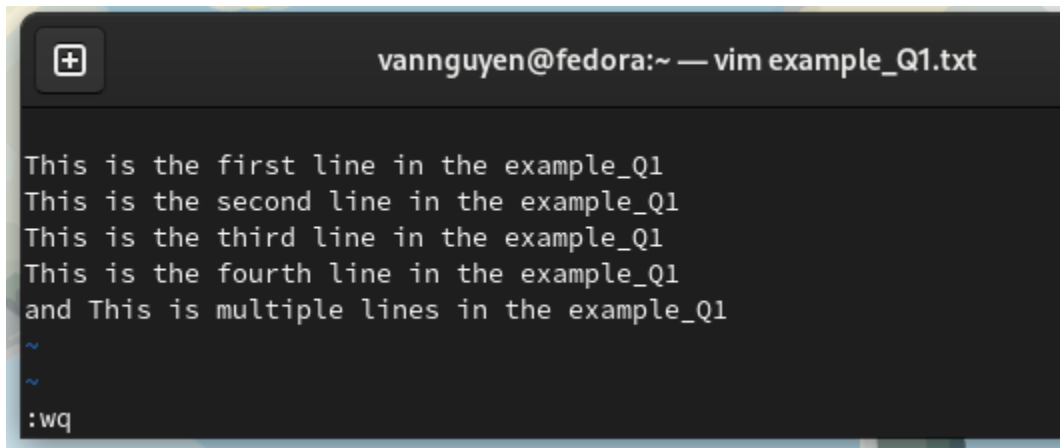


```
vannguyen@fedora:~ — vim example_Q1.txt

This is the first line in the example_Q1
This is the second line in the example_Q1
This is the third line in the example_Q1
This is the fourth line in the example_Q1
and This is multiple lines in the example_Q1
~
~
:wq
```

2. Write a python code to read those lines one by one and print them onto the terminal. Close once done.

```
$ python3
>>> fhan = open("example_Q1.txt","r")      : open file .txt
>>> inp = fhan.read()                      or print(fhan.read())
>>> print(inp)      : display the length of file
>>> fhan.close()
```

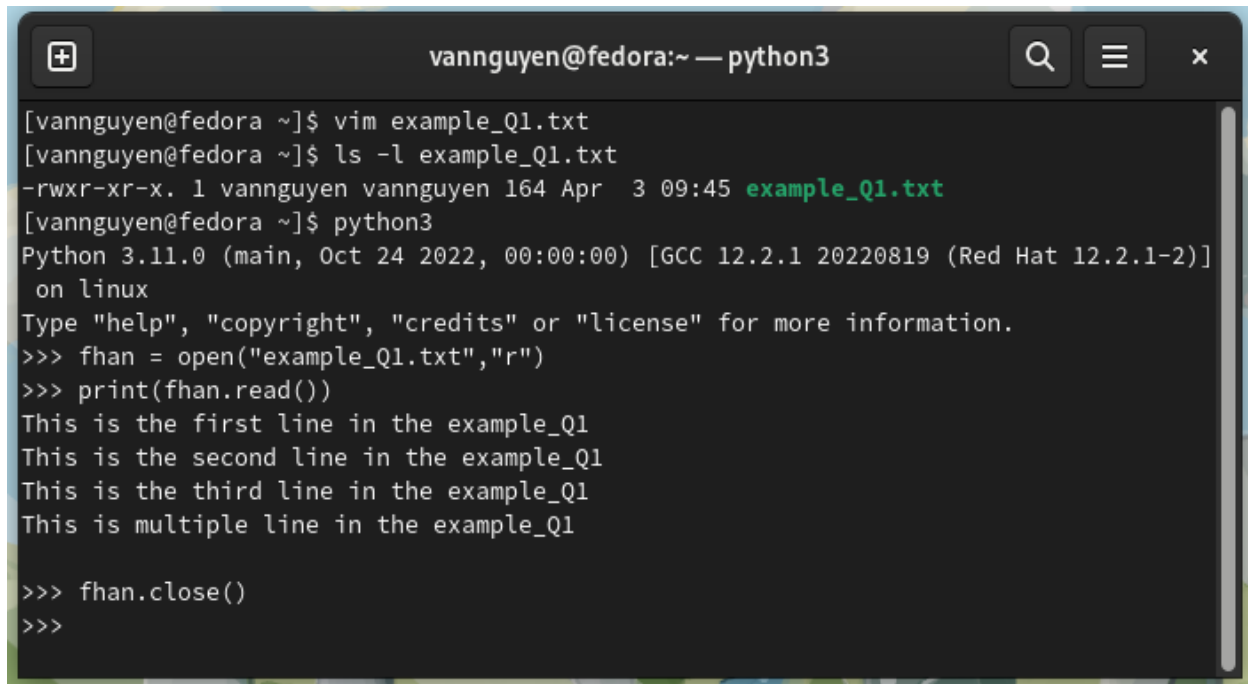

A terminal window titled 'vannguyen@fedora:~ — python3' showing a series of commands and their outputs. The user creates a file 'example_Q1.txt' with vim, lists it with 'ls -l', and then runs a python3 script. The script opens 'example_Q1.txt' in read mode, prints its contents (four lines), and closes the file. The file permissions are shown as '-rwxr-xr-x' and the size as '164' bytes.

```
[vannguyen@fedora ~]$ vim example_Q1.txt
[vannguyen@fedora ~]$ ls -l example_Q1.txt
-rwxr-xr-x. 1 vannguyen vannguyen 164 Apr  3 09:45 example_Q1.txt
[vannguyen@fedora ~]$ python3
Python 3.11.0 (main, Oct 24 2022, 00:00:00) [GCC 12.2.1 20220819 (Red Hat 12.2.1-2)]
on linux
Type "help", "copyright", "credits" or "license" for more information.
>>> fhan = open("example_Q1.txt","r")
>>> print(fhan.read())
This is the first line in the example_Q1
This is the second line in the example_Q1
This is the third line in the example_Q1
This is multiple line in the example_Q1

>>> fhan.close()
>>>
```

3. Open the same file in append mode using python commands and write an extra line to it. Finally, close when done. Check if the line was added.

4. Use the vi editor to create a text file with 10 IP addresses.

```
192.168.1.255
192.168.1.254
192.168.1.253
192.168.1.252
192.168.1.251
192.168.1.250
192.168.1.249
192.168.1.248
192.168.1.247
192.168.1.246
```




```
$ vim IP_address.txt      : Create 01 file
```

```
( i : insert )
```

```
( ESC : exit , :wq  save and quit )
```

Input

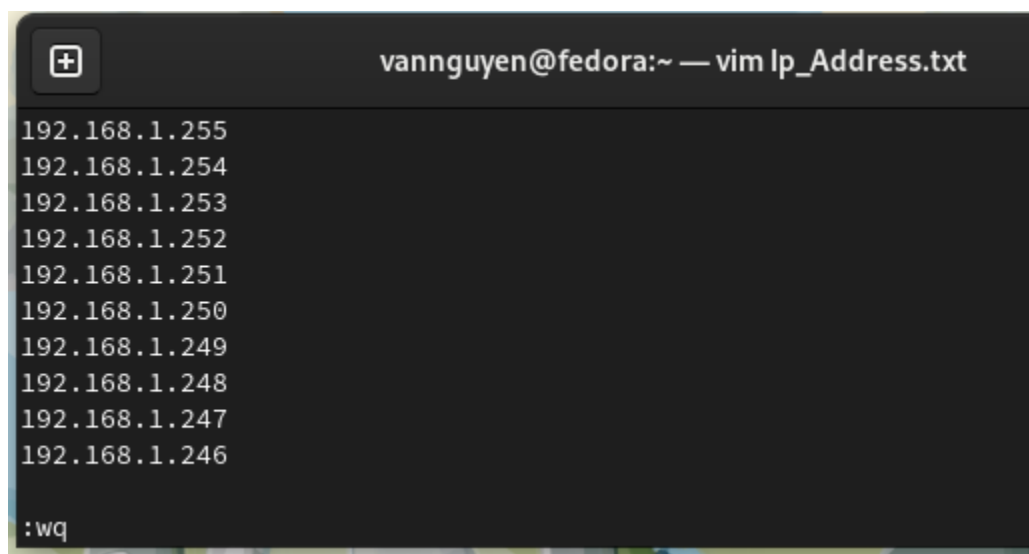

```
vannguyen@fedora:~ — vim Ip_Address.txt
192.168.1.255
192.168.1.254
192.168.1.253
192.168.1.252
192.168.1.251
192.168.1.250
192.168.1.249
192.168.1.248
192.168.1.247
192.168.1.246
:wq
```

5. Write a python code to read from the file and only print first 4 IP addresses on the screen. The output should be displayed properly i.e. one IP address in one line.

```
$ python3
```

```
>>> fhand = open("Ip_Address.txt")      : open file .txt
```

```
>>> inp = fhand.read()
```

```
>>> print(len(inp))      : display the length of file (141)
```

```
>>> Print(inp[:56])      : print first 4 IP addresses (length 56)
```



Output

```
[vannguyen@fedora ~]$ vim Ip_Address.txt
[vannguyen@fedora ~]$ ls -l Ip_Address.txt
-rw-r--r--. 1 vannguyen vannguyen 141 Apr  3 01:56 Ip_Address.txt
[vannguyen@fedora ~]$ python3
Python 3.11.0 (main, Oct 24 2022, 00:00:00) [GCC 12.2.1 20220819 (Red Hat 12.2.1-2)] on linux
Type "help", "copyright", "credits" or "license" for more information.
>>> fhand = open("Ip_Address.txt")
>>> inp = fhand.read()
>>> print(len(inp))
141
>>> print(inp[:56])
192.168.1.255
192.168.1.254
192.168.1.253
192.168.1.252
>>>
[vannguyen@fedora ~]$
```

