Tutorial - Week 7 Solutions

Objectives

- Learn SQL By Example
- Discover MySQL functions (HOMEWORK)

Connect to your MySQL database on the engineering server

1) TASK Type the query to list the id and name of all green items of type C

```
ItemID
          Name
 12
          Gortex Rain Coat
SELECT ItemID, Name
FROM item
WHERE Type = 'C'
And Colour = 'Green';
```

2) TASK Type the query to find the items delivered by at least two suppliers

```
Name
Compass - Silva
Exploring in 10 Easy Lessons
Geo positioning system
Gortex Rain Coat
How to Win Foreign Friends
Map case
Map measure
Pocket knife - Essential
Pocket knife - Steadfast
Torch
```

```
SELECT item.Name
FROM item
INNER JOIN deliveryitem
INNER JOIN delivery
ON deliveryitem.ItemID = item.ItemID
AND delivery.DeliveryID = deliveryitem.DeliveryID
GROUP BY item.Name
HAVING COUNT(DISTINCT(SupplierID)) >= 2;
```

3) TASK Find the name of the highest-paid employee in the Marketing department

```
select name
   Firstname
             Lastname
                       Salary
                       85000.00
  Ned
             Kelly
                                                                     inher join department
SELECT employee.Firstname, employee.Lastname, employee.Salary
                                                                    where depertaring name: moduling'
and solary in
t select max (salary)
FROM employee
INNER JOIN department
ON employee.DepartmentID = department.DepartmentID
WHERE department.Name = 'Marketing'
                                                                                for emplayor
```

```
AND employee.salary IN
                                             (SELECT MAX(salary)
                                                 FROM employee
                                                 INNER JOIN department
                                                 ON employee.DepartmentID = department.DepartmentID
                                           WHERE department.Name = 'Marketing')
                                                                                                                                                                                                                                                                                                     rer compasses
select supplier id suppliers

Name

From supplier

inner join delivery

inner join delivery
4) TASK Find the supplier id and supplier names that do not deliver compasses
        SELECT SupplierID, supplier.Name
       FROM supplier
       WHERE SupplierID NOT IN
                                             (SELECT SupplierID
                                                 FROM delivery
                                                 INNER JOIN deliveryItem
                                                 INNER JOIN item
```

SupplierID Name Sweatshops Unlimited Sao Paulo Manufacturino

5) TASK Find, for each department that has sold items of type E. List the department name and the average salary of the employees

ON delivery.DeliveryID = deliveryitem.DeliveryID

AND deliveryitem.ItemID = item.ItemID WHERE item.Name Like 'Compass%');

```
SELECT department.Name, FORMAT(AVG(employee.Salary),2) AS AverageSalary
FROM employee
INNER JOIN department
INNER JOIN sale
INNER JOIN saleItem
INNER JOIN item
ON employee.DepartmentID = department.DepartmentID
AND department.DepartmentID = sale.DepartmentID
AND sale.SaleID = saleItem.SaleID
AND saleItem.ItemID = item.ItemID
WHERE item. Type = 'E'
GROUP BY department.Name;
```

Name	AverageSalary
Books	45.000.00
Clothes	46.000.00
Eauloment	43.000.00
Furniture	45.000.00
Navigation	45.000.00
Recreation	45.000.00

6) TASK Find the total number of items (list the item and sale quantity) of type E sold by the departments on the second floor

```
SELECT item.Name, SUM(saleItem.Quantity) AS Quantity
FROM item
INNER JOIN saleItem
```

```
INNER JOIN sale
INNER JOIN department
ON item.ItemID = saleItem.ItemID
AND sale.SaleID = saleItem.SaleID
AND department.DepartmentID = sale.DepartmentID
WHERE item.Type = 'E'
AND department.Floor = 2
GROUP BY item.ItemID;
```

I	lame	QUANTITY
Po	ocket knife - Essential	9
To	orch	8

7) TASK Type the query to find the total quantity sold of each item by the departments on the second floor

The result set should look similar to this:

Name	TOTAL_SALES
Sun Hat	10
Pocket knife - Essential	9
Torch	8
Polar Fleece Beanie	6
Tent - 2 person	5
Boots - Womens Goretex	4
Tent - 8 person	2
Gortex Rain Coat	2
Boots - Mens Hikina	2
Boots - Womens Hikina	1
Tent - 4 person	1
Cowbov Hat	1

```
SELECT item.Name, SUM(saleItem.Quantity) as Total_Sales
FROM item
INNER JOIN saleItem
INNER JOIN sale
INNER JOIN department
on item.ItemiD = saleItem.ItemID
AND saleItem.SaleID = sale.SaleID
AND sale.DepartmentID = department.DepartmentID
WHERE department.Floor = 2
GROUP BY item.Name
ORDER BY Total_Sales DESC
```

8) TASK Find the items that are not sold by departments on the second floor but are sold on other floors within the store

When solving problems like this, work in steps

- 1. Identify the items sold on the second floor,
- 2. Then find the items that are not in the result from part 1

```
SELECT DISTINCT saleitem.ItemID, department.Floor
FROM sale
INNER JOIN saleitem
INNER JOIN department
ON sale.SaleID = saleitem.SaleID
```

The inner query identifies the itemid's that ARE sold on the second floor. The outer query then finds all itemids which have been sold but are not in the inner query but only for departments not located on the second floor.

ItemID	Floor
1	1
3	1
3	3
5	1
6	1
9	1
10	1
11	1
15	3
16	3

Compare that to this query:

```
SELECT DISTINCT ItemID, department.Floor
FROM sale
INNER JOIN saleitem
INNER JOIN department
ON sale.SaleID = saleitem.SaleID
AND sale.DepartmentID = department.DepartmentID
WHERE department.Floor!=2
ORDER BY ITEMID;
```

This query only finds items sold on floors other than the second floor – but this includes items which also happen to have been sold on the second floor.

ItemID	Floor
1	1
3	3
3	1
5	1
6	1
9	1
10	1
11	1
12	3
12	4
12	1
14	3
14	4
14	1
15	3
16	3
17	3
17	4
17	1

The additional itemid's are 12 14 and 17. A final guery will confirm which floors items 12, 14 and 17 are sold on

```
SELECT DISTINCT(item.ItemID), department.Floor
FROM item
INNER JOIN saleitem
INNER JOIN sale
INNER JOIN department
ON item.ItemID = saleitem.ItemID
AND saleitem.SaleID = sale.SaleID
AND sale.DepartmentID = department.DepartmentID
WHERE saleitem. ItemID IN (12,14,17)
ORDER BY item.ItemID, department.Floor;
```

ItemID	Floor
12	1
12	2
12	3
12	4
14	1
14	2
14	3
14	4
17	1
17	2
17	3
17	4

Be sure you understand the question being asked.

Movy 101 M



9) TASK Find the numbers and names of the employees who earn more than their manager.

```
SELECT emp.EmployeeID, emp.FirstName, emp.LastName, emp.Salary as empSal,
boss.Salary as BossSal
FROM employee emp
INNER JOIN employee boss
ON emp.BossID = boss.EmployeeID
WHERE boss.Salary < emp.Salary;</pre>
```

Note: This is a unary join – we have created aliases for the Employee table. The first alias is 'emp' the second 'boss'

EmployeeID	FirstName	LastName	empSal	BossSal
8	Sarah	Ferausson	86000.00	73000.00

10)TASK Find, for each department on the second floor, the average salary of the employees

```
SELECT d.Name, FORMAT(AVG(e.Salary),2) AS AverageSalary
FROM employee e
INNER JOIN department d
ON e.DepartmentID = d.DepartmentID
WHERE d.Floor = 2
GROUP BY d.Name;
```

Name	AverageSalary
Clothes	46.000.00
Recreation	45.000.00

11) TASK List suppliers that deliver a total quantity of items of types C and N that is greater than 40

In this SQL query we are building the query in stages

```
i) First let's find the items that are of type C and N
```

```
SELECT item.Name, item.Type
FROM item
WHERE item.Type IN ('C','N')
ORDER BY item.Name;
```

ii) Then find out how many of those items have been delivered

```
SELECT item.Name, SUM(deliveryitem.Quantity)
FROM deliveryitem
INNER JOIN item
ON deliveryitem.ItemID = item.ItemID
WHERE item.Type in ('C','N')
GROUP BY item.Name;
```

iii) And if the quantity delivered is greater than 40

```
SELECT item.Name, SUM(deliveryitem.Quantity) AS TotalQty
FROM deliveryitem
INNER JOIN item
ON deliveryitem.ItemID = item.ItemID
WHERE item.Type in ('C','N')
GROUP BY item.Name
HAVING TotalQty > 40;
```

iv) Now let's find the Supplier Names and IDs:

```
Placed below are three different approaches to solving this task
```

```
SELECT delivery.SupplierID, s.Name, SUM(deliveryitem.Quantity) AS TotalQty FROM supplier s
```

```
INNER JOIN delivery
INNER JOIN deliveryitem
Inner Join item
ON s.SupplierID = delivery.SupplierID
AND delivery.DeliveryID = deliveryitem.DeliveryID
AND deliveryitem ItemID = item.ItemID
WHERE item. Type (IN)('C', 'N')
GROUP BY delivery.SupplierID, s.Name
HAVING TotalQty > 40;
Notice the difference in the WHERE statement using ar OR:
SELECT d.SupplierID, supplier.Name , SUM(deliveryitem.Quantity) AS TotalQty
FROM supplier
INNER JOIN delivery d
INNER JOIN delivervitem
INNER JOIN item
ON supplier.SupplierID = d.SupplierID
AND d.DeliveryID = deliveryitem.DeliveryID
AND deliveryitem.ItemID = item.ItemID
WHERE (item.Type = 'C OR item.Type = 'N')
GROUP BY d.SupplierID, supplier.Name
HAVING TotalOty > 40;
And the WHERE x OR y condition can be written without parenthesis
SELECT delivery.SupplierID, s.Name , SUM(deliveryitem.Quantity) AS TotalQty
FROM supplier s
INNER JOIN delivery
INNER JOIN deliveryitem
INNER JOIN item
ON s.SupplierID = delivery.SupplierID
AND delivery.DeliveryID = deliveryitem.DeliveryID
AND deliveryitem.ItemID = item.ItemID
WHERE item.Type = 'C' OR item.Type = 'N'
GROUP BY delivery.SupplierID, s.Name
HAVING TotalQty > 40;
```

The result is the same:

SupplierID	Name
101	Global Books & Maps
105	All Points Inc.

12) TASK What is the average delivery quantity of items of type N made by each company who delivers them. Be sure to list the Supplier ID and name, Item type and name and average delivery quantity in your answer.

```
SELECT delivery.SupplierID, supplier.Name AS supplier,
item. Type, item. Name AS Item, FORMAT(AVG(deliveryitem. Quantity), 2) AS AvgDelQty
FROM supplier
INNER JOIN delivery
INNER JOIN deliveryitem
INNER JOIN item
ON supplier.SupplierID = delivery.SupplierID
```

```
AND delivery.DeliveryID = deliveryitem.DeliveryID
AND deliveryitem.ItemID = item.ItemID
WHERE item.Type = 'N'
GROUP BY delivery.SupplierID, supplier.Name, item.Name;
```

SupplierID	supplier	Type	Item	AvgDelQty
101	Global Books & Maps	N	Compass - Silva	4.67
102	Nepalese Corp.	N	Compass - Silva	3.00
103	All Sports Manufacturing	N	Compass - Silva	8.00
105	All Points_ Inc.	N	Compass - Silva	1.00
101	Global Books & Maps	N	Geo positioning sy	3.00
102	Nepalese Corp.	N	Geo positioning sy	4.00
103	All Sports Manufacturing	N	Geo positioning sy	1.50
101	Global Books & Maps	N	Map measure	10.00
102	Nepalese Corp.	N	Map measure	10.00
103	All Sports Manufacturing	N	Map measure	10.00

13) TASK List the name and salary of the managers with more than 2 employees SELECT employee.FirstName, employee.LastName, employee.Salary

```
FROM employee
WHERE employeeID IN
(SELECT BossID
FROM employee
GROUP BY BossID
HAVING COUNT(*) > 2);
```

FirstName	LastName	Salary
Alice	Munro	125000.00
Andrew	Jackson	55000.00
Clare	Underwood	52000.00

14) TASK List item names that are delivered by Nepalese Corp and sold in the Navigation department

```
SELECT DISTINCT item.Name
FROM item
WHERE ItemID IN
 (SELECT ItemID
  FROM deliveryitem
  INNER JOIN delivery
  INNER JOIN supplier
  ON delivery.DeliveryID = deliveryitem.DeliveryID
  AND supplier.SupplierID = delivery.SupplierID
  WHERE supplier.Name = 'Nepalese corp.')
AND ItemID IN
 (SELECT ItemID
  FROM saleitem
  INNER JOIN sale
  INNER JOIN department
  ON saleitem.SaleID = sale.SaleID
  AND sale.DepartmentID = department.DepartmentID
  WHERE department.Name = 'Navigation');
```



15) TASK Type the query that finds the name and salary of Clare Underwood's manager SELECT employee.FirstName, employee.LastName, employee.Salary

```
FROM employee
WHERE employeeID IN
(SELECT BossID
FROM employee
WHERE employee.FirstName = 'Clare'
AND employee.LastName = 'Underwood');
```

FirstName	LastName	Salary
Ned	Kellv	85000.00

16) TASK List the ids of the departments where all of the employees earn less than their manager

```
SELECT DISTINCT DepartmentID
FROM employee
WHERE DepartmentID NOT IN
(SELECT wrk.DepartmentID
FROM employee wrk
INNER JOIN employee boss
ON wrk.BossID = boss.employeeID
WHERE wrk.Salary >= boss.Salary)
AND employee.bossid IS NOT NULL
ORDER BY DepartmentID;
```

Hint: Notice that the inner query uses a unary join to create a result set that lists all departmentids where an employee earns more than their boss. That is why the condition is NOT IN

DepartmentID
2
3
4
5
6
7
8
10
11

17) TASK Find the supplier id and supplier names that deliver both compasses and at least one item other than compasses

Attempt 1:


```
SELECT DISTINCT delivery.SupplierID, supplier.Name
    FROM supplier
    INNER JOIN delivery
    INNER JOIN delivervitem
    INNER JOIN item
    ON supplier.SupplierID = delivery.SupplierID
    AND delivery.DeliveryID = deliveryitem.DeliveryID
    AND delivervitem. ItemID = item. ItemID
    WHERE item.Name NOT LIKE 'Compass%'
    AND delivery.SupplierID IN
           (SELECT SupplierID
            FROM delivery
            INNER JOIN deliveryitem
            INNER JOIN item
            ON delivery.DeliveryID = deliveryitem.DeliveryID
            AND delivervitem. ItemID = item. ItemID
           WHERE item.Name LIKE 'Compass%')
    ORDER BY delivery.SupplierID;
Attempt 2:
    SELECT DISTINCT delivery.SupplierID, supplier.Name
    FROM supplier
    INNER JOIN delivery
    INNER JOIN deliveryitem
    INNER JOIN item
    ON supplier.SupplierID = delivery.SupplierID
    AND delivery.DeliveryID = deliveryitem.DeliveryID
    AND deliveryitem.ItemID = item.ItemID
    WHERE delivery.SupplierID IN
           (SELECT SupplierID
           FROM delivery
            INNER JOIN deliveryitem
            INNER JOIN item
            ON delivery.DeliveryID = deliveryitem.DeliveryID
            AND deliveryitem.ItemID = item.ItemID
           WHERE item.Name LIKE 'Compass%')
    GROUP BY delivery.SupplierID, supplier.Name
    HAVING COUNT(DISTINCT item.Name) > 1
    ORDER BY delivery.SupplierID;
```

SupplierID	Name
101	Global Books & Maps
102	Nepalese Corp.
103	All Sports Manufacturing
105	All Points Inc.

Note: Attempt 1 uses the approach to find those suppliers that supply things other than compasses and also supply compasses (sub query).

Attempt 2 uses a more generalizable approach. The generalizable approach is better as it allows queries such as "Find suppliers that deliver two items other than compasses" — change the >1 to >2 in the HAVING clause in Attempt 2 to do this. (Attempt 2 uses DISTINCT to handle multiple deliveries of compasses for the same supplier.)

Appendix New Department Store Physical ER Model

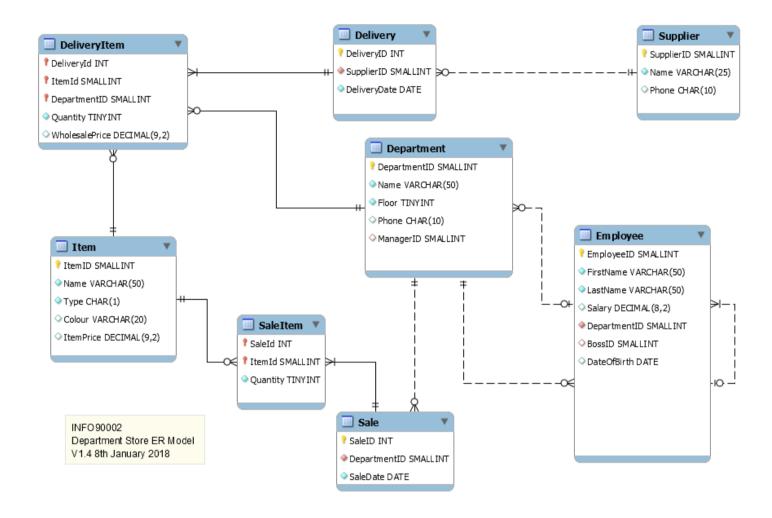

SQL Homework - Functions

Most of this week's homework requires you to read the manual. That is the functions section of the MySQL reference manual https://dev.mysql.com/doc/refman/8.0/en/functions.html

1) H1 How many deliveries have there been in the month of July?

Hint: the only information you have been given is the month name

```
SELECT COUNT(DeliveryID) AS NumDeliveries
FROM Delivery
WHERE MONTHNAME(deliverydate) = 'July';
```

2) H2 List the names of the tents available for sale

```
SELECT name
FROM Item
WHERE name like '%Tent%';
```

3) H3 What month has had the highest number of sales?

```
SELECT COUNT(SaleID) AS NumSales, MONTHNAME(SaleDate) AS Month
FROM sale
GROUP BY MONTHNAME(SaleDate)
ORDER BY NumSales DESC
LIMIT 1;
```

4) H4 List the salary total and employee count for each departmentid. Order by the smallest salary total to largest.

```
SELECT DepartmentID, COUNT(employeeid) AS Number_Of_Employees, SUM(Salary)
AS Total_Salary
FROM Employee
GROUP BY DepartmentID
ORDER BY Total Salary;
```

5) H₅ How many sales have been on a Sunday?

```
SELECT COUNT(saleID) AS Number_of_Sales
FROM sale
WHERE DAYNAME(Saledate) = 'Sunday';
```

6) H6 How many days have elapsed between the first delivery date and most recent delivery date for each supplier?

```
SELECT SupplierID, DATEDIFF(MAX(deliverydate), MIN(deliverydate)) AS
Days_Elapsed, COUNT(DISTINCT(deliverydate)) AS Number_of_Deliveries
FROM Delivery
GROUP BY SupplierID;
```

7) H7 Produce the following output by writing a SQL statement

Where is each department?
The Management department is on floor number 5
The Books department is on floor number 1
The Clothes department is on floor number 2
The Equipment department is on floor number 3
The Furniture department is on floor number 4
The Navigation department is on floor number 1
The Recreation department is on floor number 2
The Accounting department is on floor number 5
The Purchasing department is on floor number 5
The Personnel department is on floor number 5
The Marketing department is on floor number 5

```
SELECT CONCAT('The ',name,' department is on floor number ', floor) AS 'Where is each department?' FROM department;
```

8) H8 Find the minimum, maximum, average and standard deviation for salaries in each department.

```
SELECT DepartmentID, MIN(Salary) AS Lowest_Salary, MAX(Salary) AS Highest_Salary, AVG(Salary) AS Average_Salary, STDDEV(Salary) AS Standard_Deviation FROM Employee GROUP BY DepartmentID;
```

9) H9 How many sales were made in the year 2017?

```
SELECT COUNT(SaleID) AS Number_of_Sales
FROM sale
WHERE YEAR(SaleDate) = 2017;
```

NumberOfSales

▶ 43