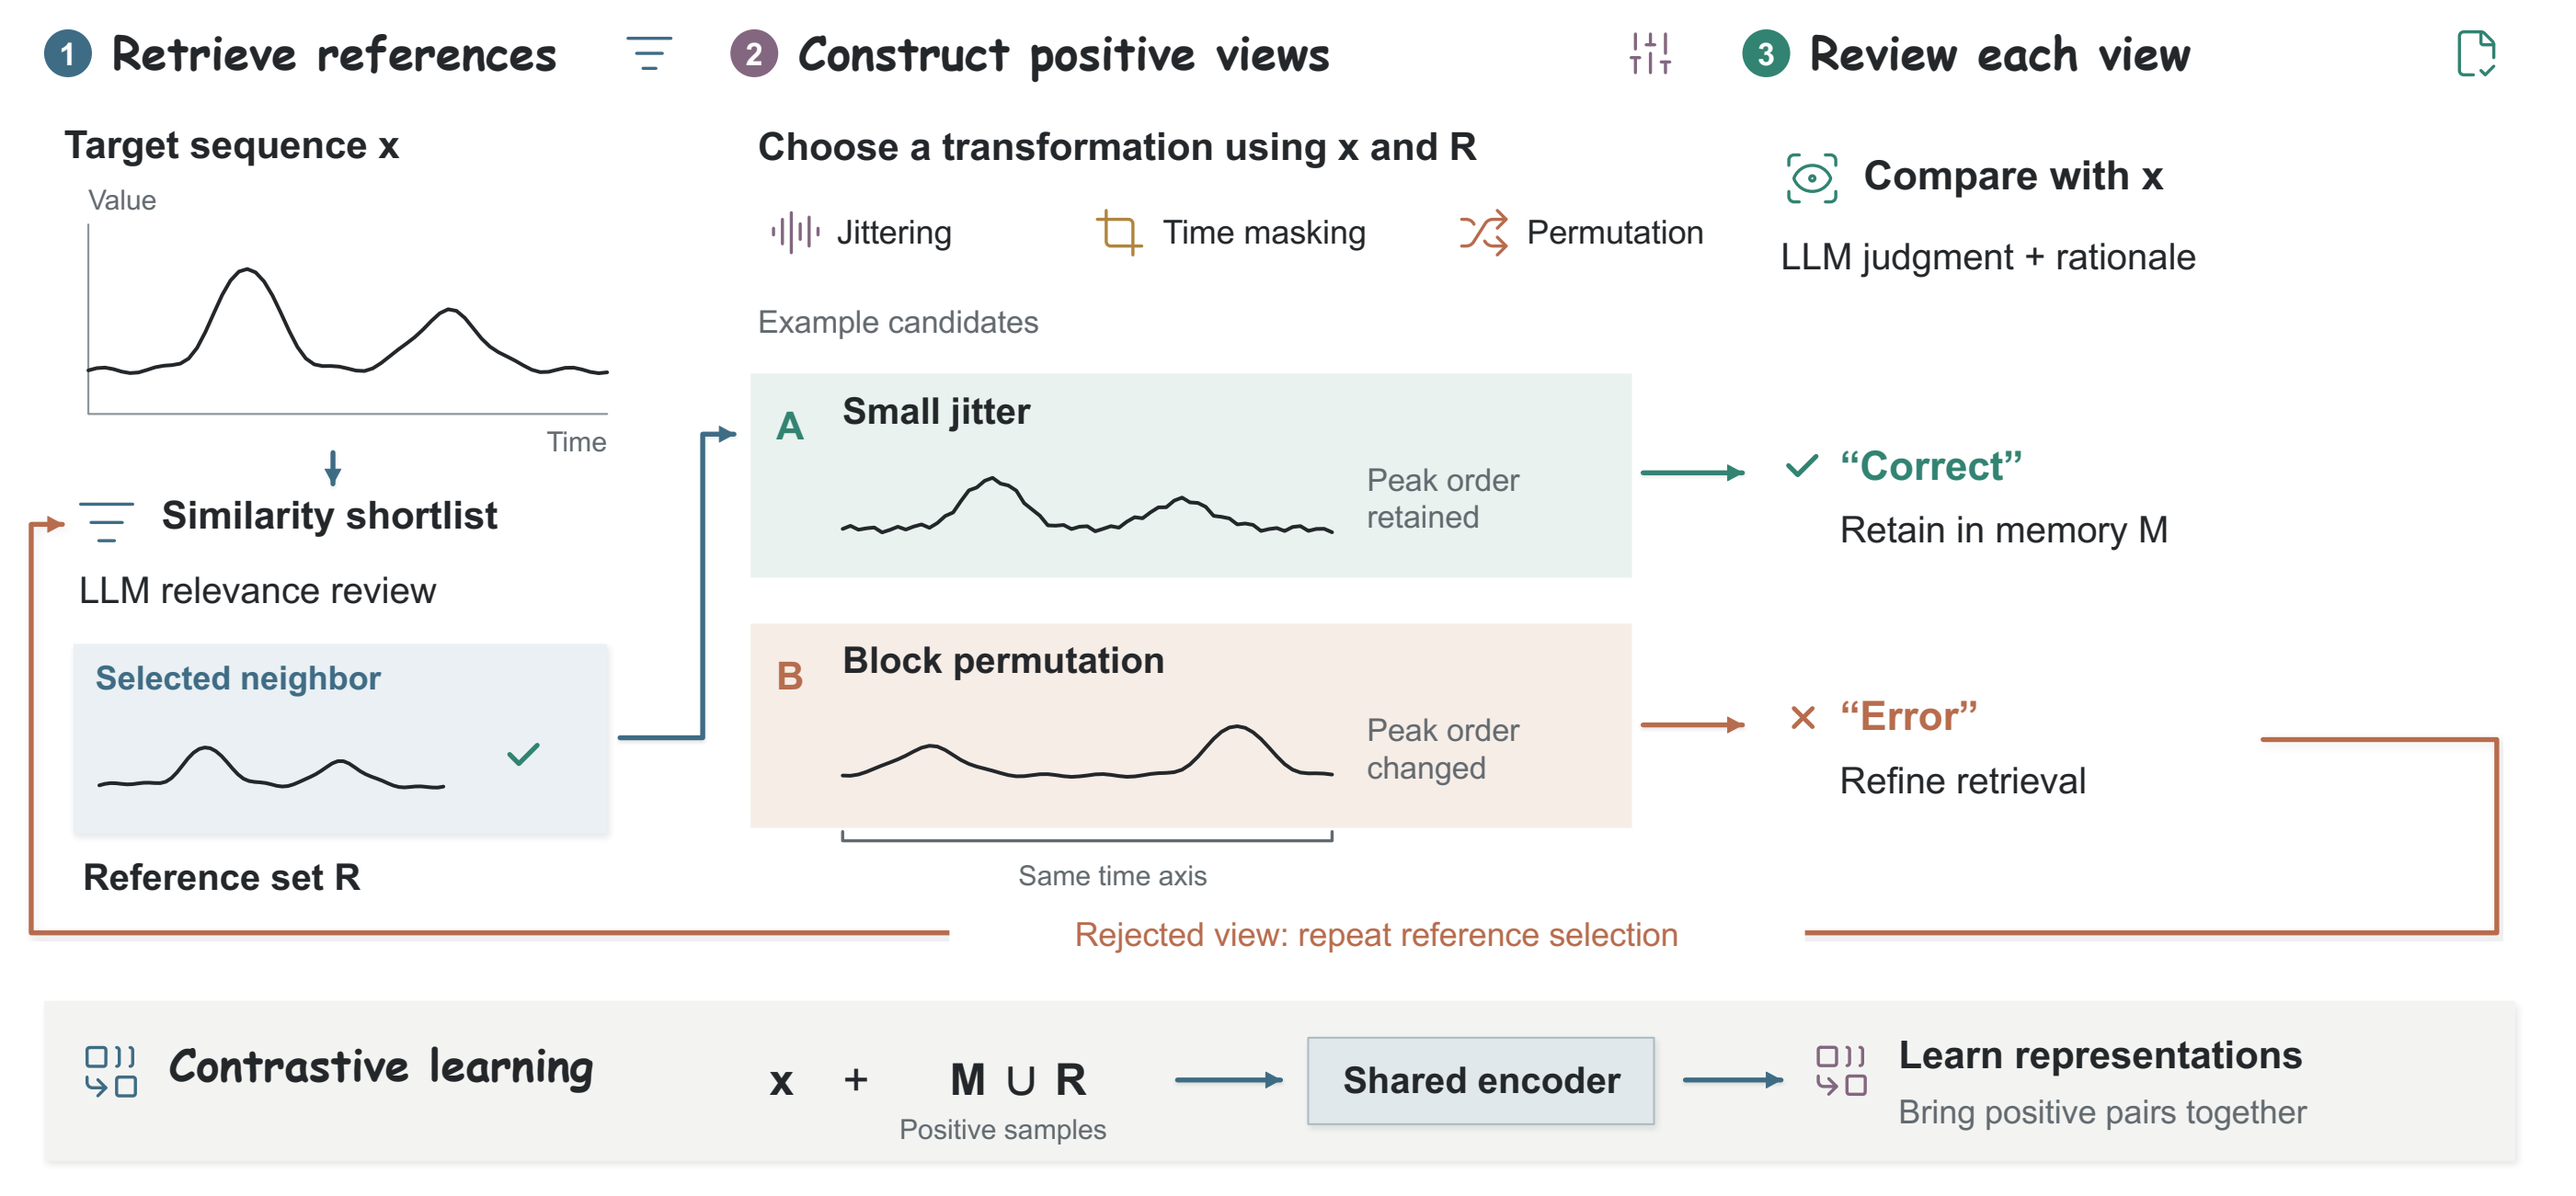

1 Retrieve references
2 Construct positive views
3 Review each view
Target sequence x
Value
Time
Similarity shortlist
LLM relevance review
Selected neighbor
Reference set R
Choose a transformation using x and R
Jittering
Time masking
Permutation
Example candidates
A
Small jitter
Peak order retained
B
Block permutation
Peak order changed
Same time axis
Compare with x
LLM judgment + rationale
“Correct”
Retain in memory M
“Error”
Refine retrieval
Rejected view: repeat reference selection
Contrastive learning
x + M ∪ R
Positive samples
Shared encoder
Learn representations
Bring positive pairs together