# How to Build a Time Series Agent

*Reuse what is general · adapt what is temporal · rebuild what is task-bound*

## ALIGN · LLM

*interprets temporal evidence and selects actions*

- Represent numbers for the language model
- Reason over temporal evidence
- Learn which workflow action to take

→ Not enough alone: it acts through the harness

## REUSE · GENERAL HARNESS

*domain-independent runtime*

- Interaction & memory
- Tools & execution
- Planning & coordination
- Feedback & self-improvement


→ Carry it over from general Agents

## ADAPT · GENERAL TIME SERIES HARNESS

*temporal semantics shared across tasks*

- Timestamps, units, missingness
- Windows, resampling, decomposition
- Only information available at $t_0$
- Chronology guards & validators

→ Add time where a generic runtime is ambiguous

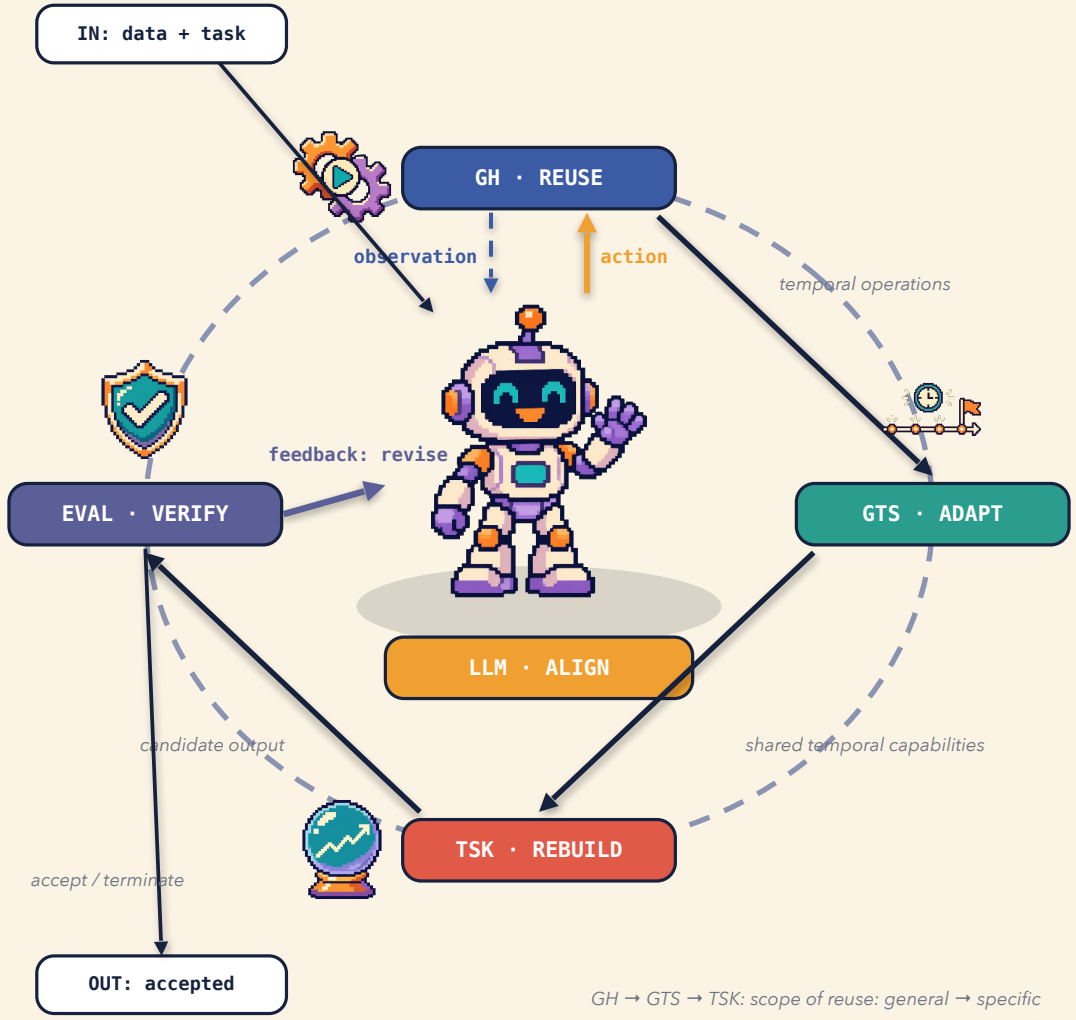


## REBUILD · TASK-SPECIFIC HARNESS

*procedures bound to one task contract*

- Forecasting
- Synthesis & augmentation
- Anomaly diagnosis
- Decision support

→ Rebuild around output, objective and actions

## VERIFY · EVALUATION

*tests the complete workflow*

- Process validity
- Temporal validity
- Task performance
- Decision utility

→ Valid run ≠ accurate result ≠ useful decision

**IN** Scenario & data
series · context · task request

**OUT** Accepted output
forecast · diagnosis · decision

**KEY CLAIM**
**Align model capability, harness responsibility and evaluation**