


Seven dimensions of a General Harness

The dimensions describe reusable runtime mechanisms; temporal semantics are added by the Time-Series Harness layer.

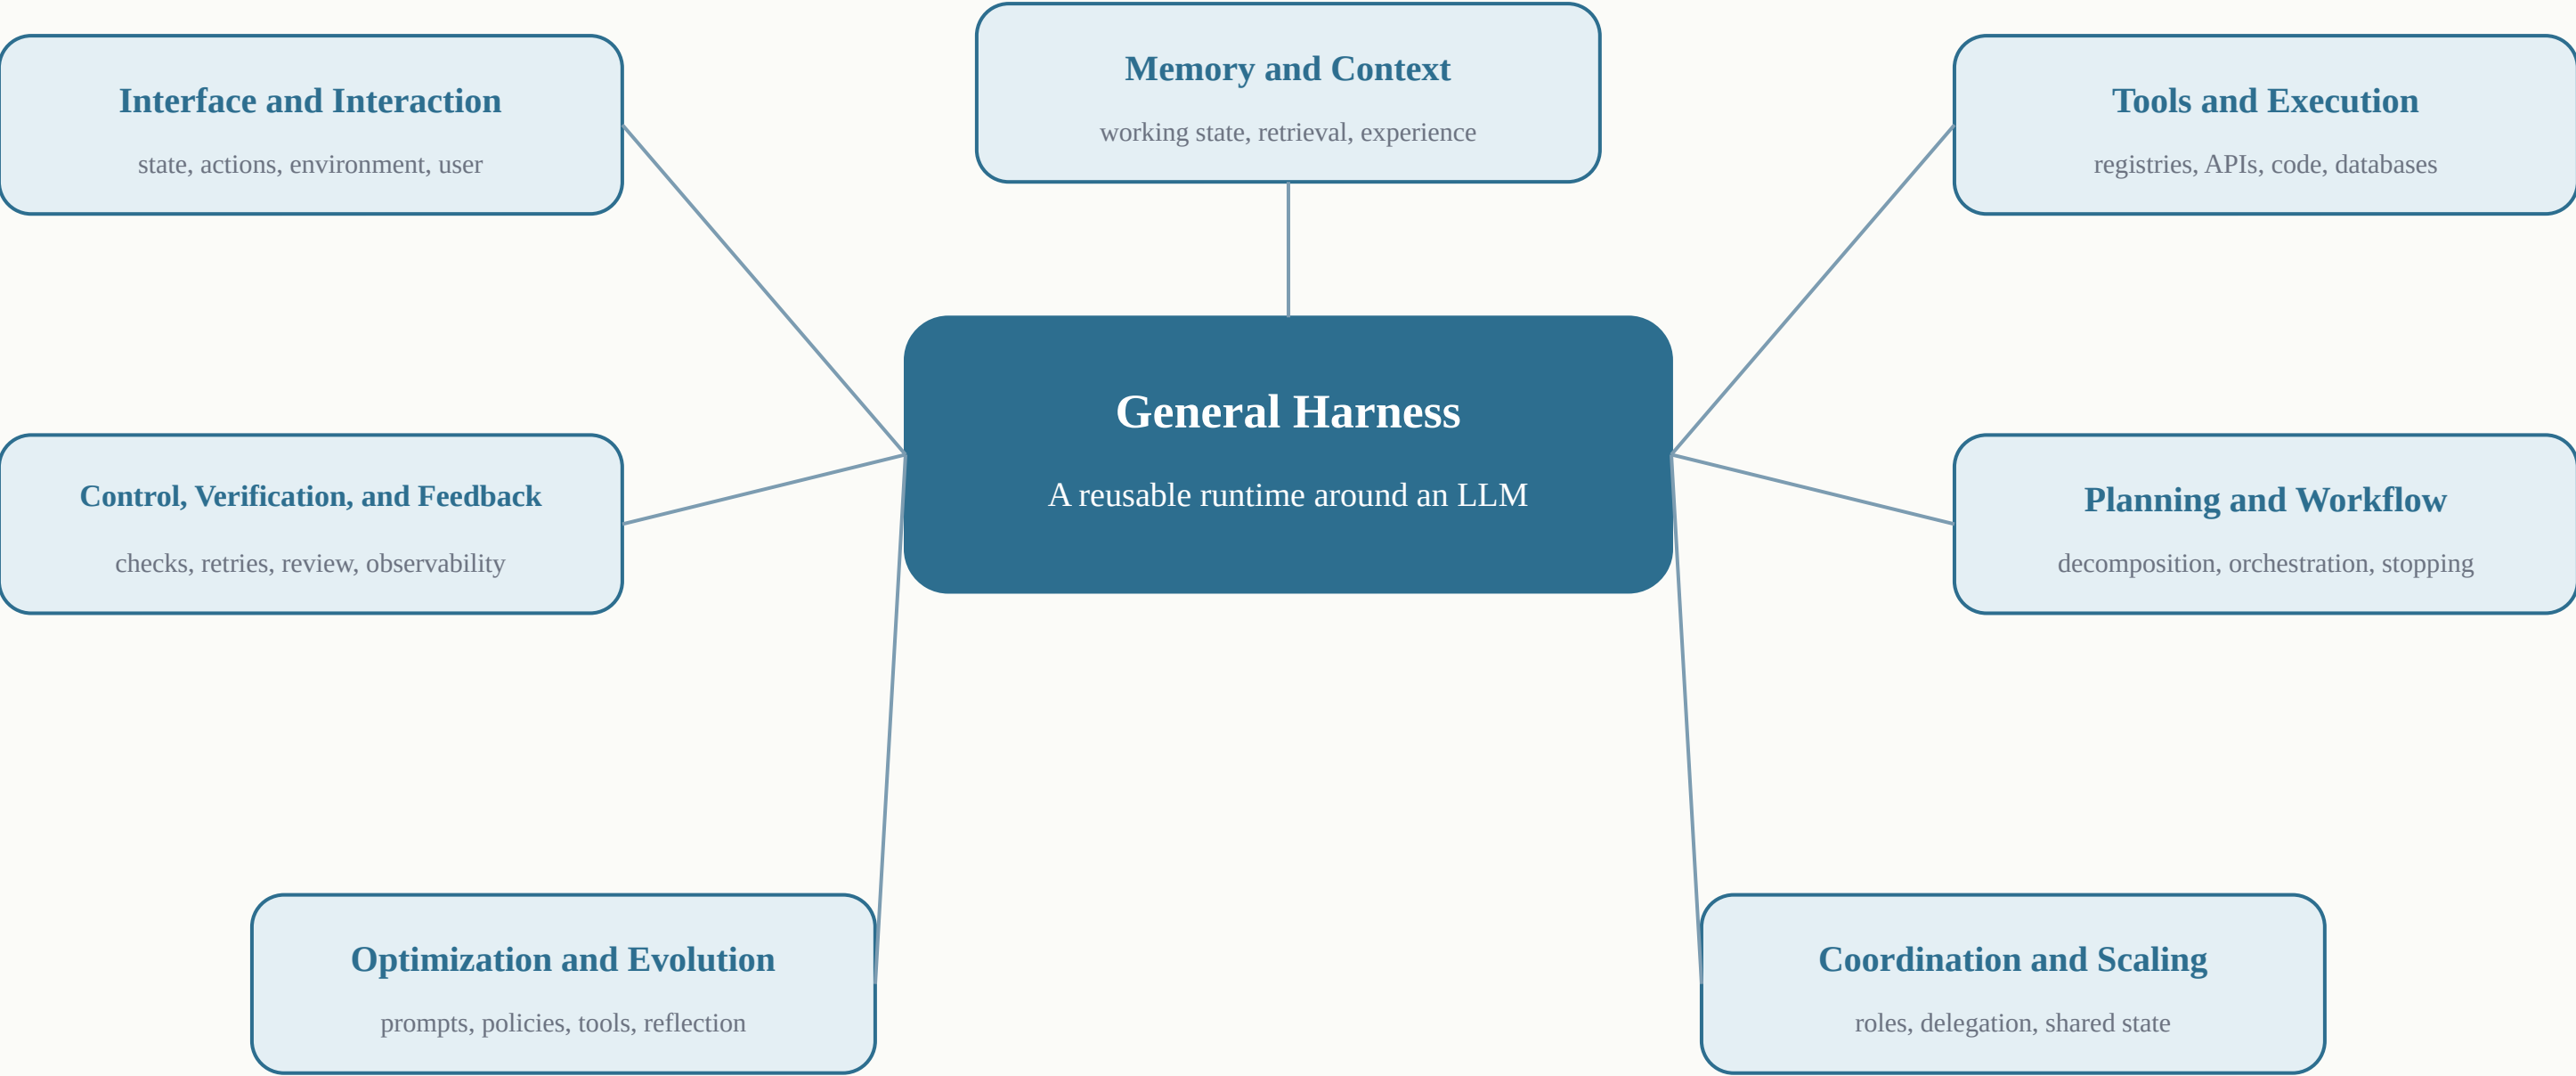

A paper can contribute to several dimensions. The seven labels form the shared comparison layer used before temporal and task-specific coding.