



Relatório do Laboratório 2 - Linha de Comando

Questão 1

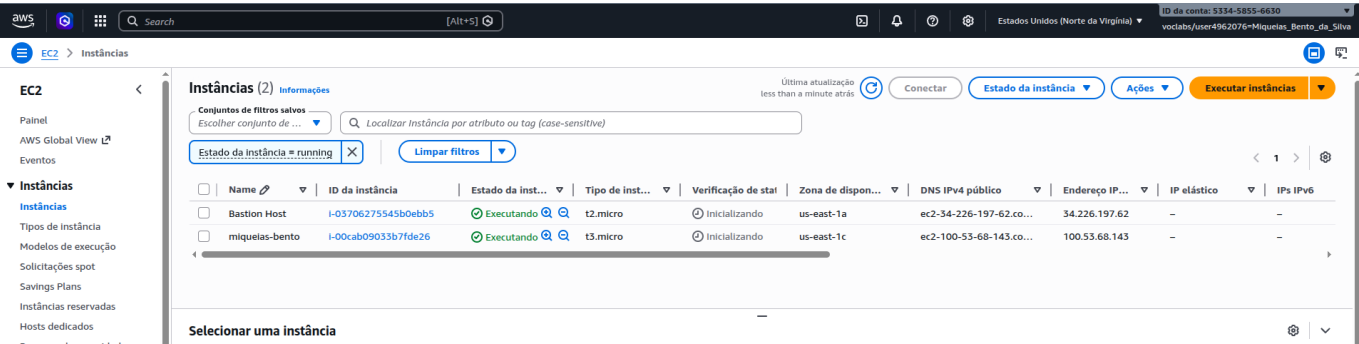

Criação da instância com o nome "miqueias-bento".

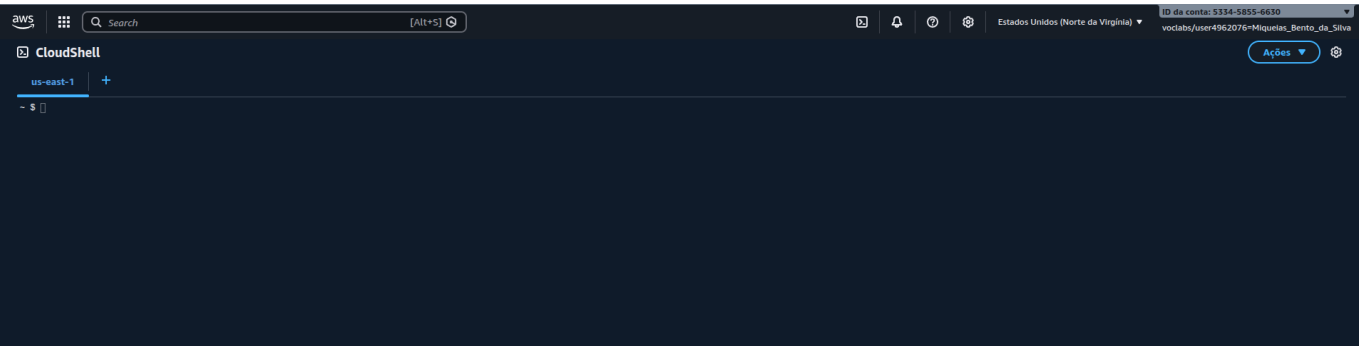


Acesso ao CloudShell.

Questão 2

Para cada comando a seguir, ajuste para a sua máquina virtual (geralmente o id ou nome da máquina virtual) e execute. Alguns comandos vão resultar num erro propositalmente. Relate o resultado de cada um. Pode ser textual, pode ser um print de parte da tela.


- aws ec2 describe-instances

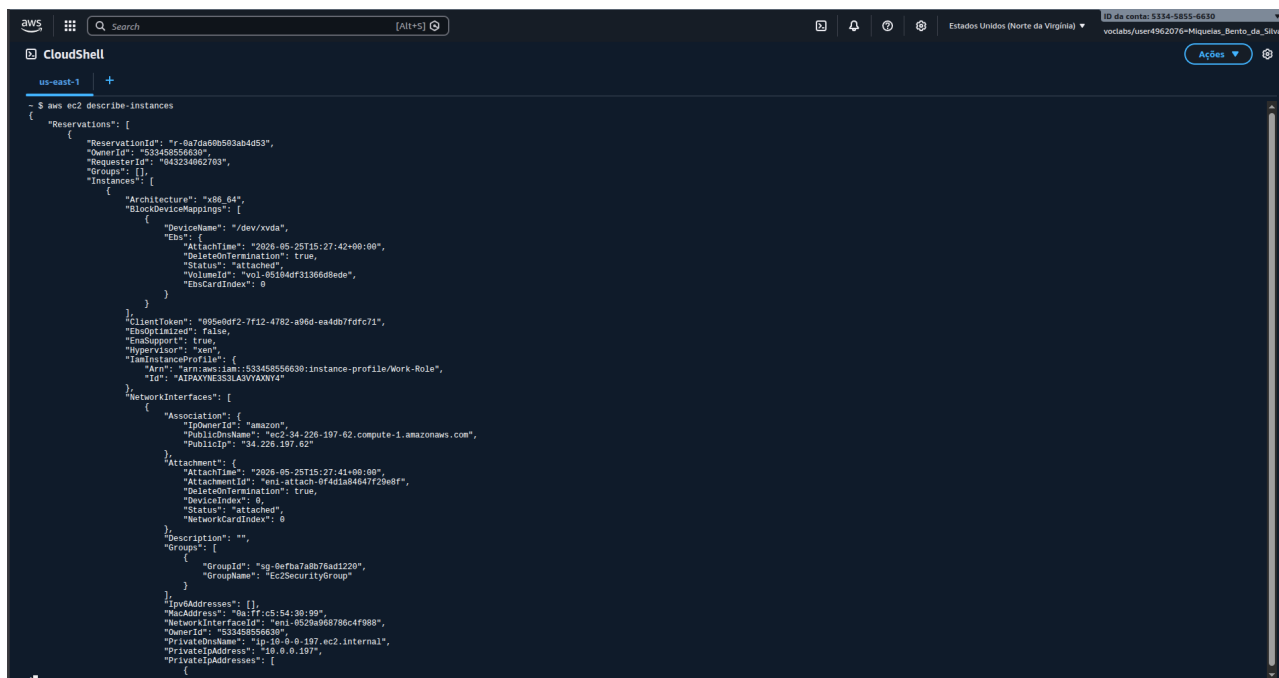

```
aws
Search [Alt+S]
CloudShell
us-east-1
$ aws ec2 describe-instances
{
  "Reservations": [
    {
      "ReservationId": "r-8a7da60b503ab4d53",
      "OwnerId": "333458556630",
      "RequesterId": "043234862703",
      "Groups": [
        {
          "Name": "sg-8efb7a7b976ad1220"
        }
      ],
      "Instances": [
        {
          "Architecture": "x86_64",
          "BlockDeviceMappings": [
            {
              "DeviceName": "/dev/xvda",
              "Ebs": {
                "AttachTime": "2020-05-25T15:27:42+00:00",
                "DeleteOnTermination": true,
                "Status": "attached",
                "VolumeId": "vol-05104df313668ede",
                "EbsCardIndex": 0
              }
            }
          ],
          "ClientToken": "00be8df2-7f12-4782-a96d-ea4db7dfcf71",
          "EbsOptimized": false,
          "EnaSupport": true,
          "Hypervisor": "xen",
          "IamInstanceProfile": {
            "Arn": "arn:aws:iam::333458556630:instance-profile/Work-Role",
            "Id": "AIPAWES33LA3VAVANVq"
          },
          "NetworkInterfaces": [
            {
              "Attachment": {
                "Association": {
                  "IpOwnerId": "amazon",
                  "PublicDnsName": "ec2-34-228-197-62.compute-1.amazonaws.com",
                  "PublicIp": "34.228.197.62"
                },
                "AttachTime": "2020-05-25T15:27:41+00:00",
                "AttachmentId": "eni-attach-0f4d1a84647729e8f",
                "DeleteOnTermination": true,
                "DeviceIndex": 0,
                "Status": "attached",
                "NetworkCardIndex": 0
              },
              "Description": "",
              "Groups": [
                {
                  "GroupId": "sg-8efb7a7b976ad1220",
                  "GroupName": "Ec2SecurityGroup"
                }
              ],
              "Ipv6Addresses": [],
              "MacAddress": "0a:7f:cc:54:30:99",
              "NetworkInterfaceId": "eni-8539a86786c4f980",
              "OwnerId": "333458556630",
              "PrivateDnsName": "ip-10-0-0-197.ec2.internal",
              "PrivateIpAddress": "10.0.0.197",
              "PrivateIpAddresses": [
                {
                  "PrivateIpAddress": "10.0.0.197"
                }
              ]
            }
          ],
          "Description": "",
          "Groups": [
            {
              "GroupId": "sg-8efb7a7b976ad1220",
              "GroupName": "Ec2SecurityGroup"
            }
          ],
          "Ipv6Addresses": [],
          "MacAddress": "0a:7f:cc:54:30:99",
          "NetworkInterfaceId": "eni-8539a86786c4f980",
          "OwnerId": "333458556630",
          "PrivateDnsName": "ip-10-0-0-197.ec2.internal",
          "PrivateIpAddress": "10.0.0.197",
          "PrivateIpAddresses": [
            {
              "PrivateIpAddress": "10.0.0.197"
            }
          ]
        }
      ]
    }
  ]
}
```

Listou todas as instâncias EC2 disponíveis na conta e região configuradas no ambiente da AWS CLI, retornando informações detalhadas sobre cada máquina virtual.


- aws ec2 describe-instances --instance-ids i-1234567890abcdef0

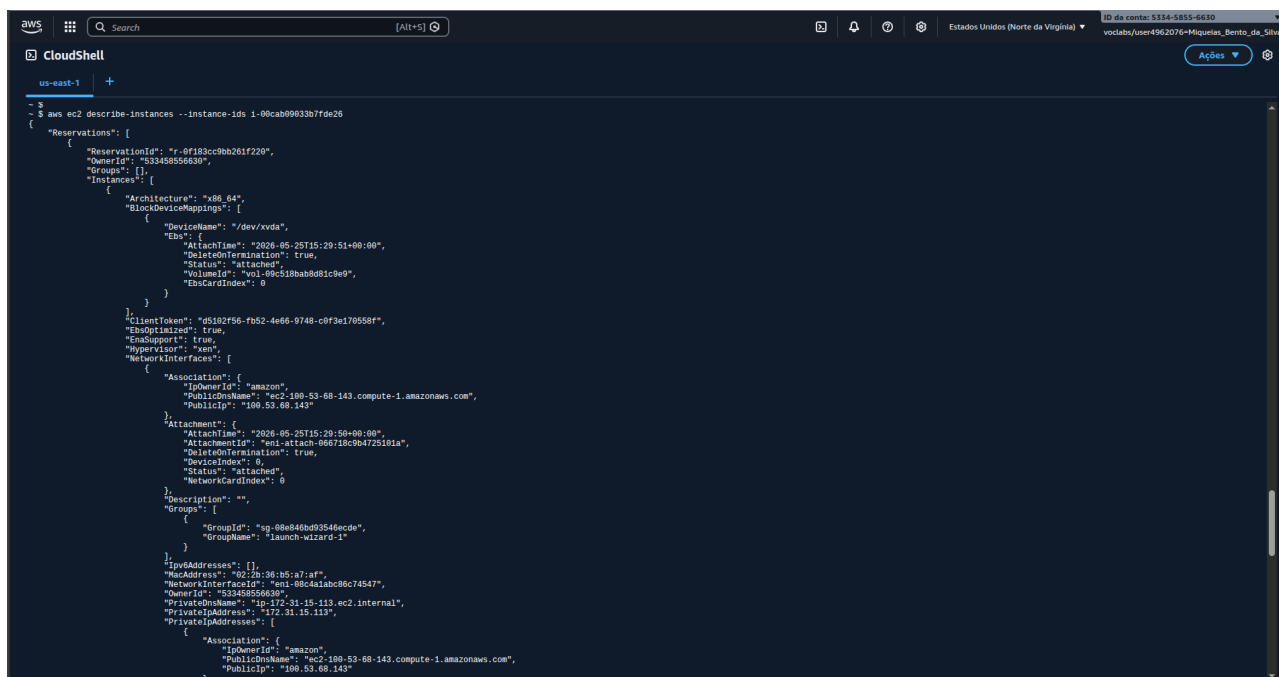

```
aws
Search [Alt+S]
CloudShell
us-east-1
$ aws ec2 describe-instances --instance-ids i-10cab09033b77de26
{
  "Reservations": [
    {
      "ReservationId": "r-9f183cc9b2b21f226",
      "OwnerId": "333458556630",
      "RequesterId": "043234862703",
      "Groups": [
        {
          "Name": "sg-8efb7a7b976ad1220"
        }
      ],
      "Instances": [
        {
          "Architecture": "x86_64",
          "BlockDeviceMappings": [
            {
              "DeviceName": "/dev/xvda",
              "Ebs": {
                "AttachTime": "2020-05-25T15:29:51+00:00",
                "DeleteOnTermination": true,
                "Status": "attached",
                "VolumeId": "vol-09c318bab8d81c9e9",
                "EbsCardIndex": 0
              }
            }
          ],
          "ClientToken": "d5192f56-fb52-4e66-9748-c8f3e170558f",
          "EbsOptimized": true,
          "EnaSupport": true,
          "Hypervisor": "xen",
          "IamInstanceProfile": {
            "Arn": "arn:aws:iam::333458556630:instance-profile/Work-Role",
            "Id": "AIPAWES33LA3VAVANVq"
          },
          "NetworkInterfaces": [
            {
              "Attachment": {
                "Association": {
                  "IpOwnerId": "amazon",
                  "PublicDnsName": "ec2-100-53-68-143.compute-1.amazonaws.com",
                  "PublicIp": "100.53.68.143"
                },
                "AttachTime": "2020-05-25T15:29:50+00:00",
                "AttachmentId": "eni-attach-866718c9b4725181a",
                "DeleteOnTermination": true,
                "DeviceIndex": 0,
                "Status": "attached",
                "NetworkCardIndex": 0
              },
              "Description": "",
              "Groups": [
                {
                  "GroupId": "sg-8efb7a7b976ad1220",
                  "GroupName": "Launch-wizard-1"
                }
              ],
              "Ipv6Addresses": [],
              "MacAddress": "02:2b:38:b5:a7:a",
              "NetworkInterfaceId": "eni-08c4a1ab08674547",
              "OwnerId": "333458556630",
              "PrivateDnsName": "ip-172-31-15-113.ec2.internal",
              "PrivateIpAddress": "172.31.15.113",
              "PrivateIpAddresses": [
                {
                  "PrivateIpAddress": "172.31.15.113"
                }
              ]
            }
          ],
          "Description": "",
          "Groups": [
            {
              "GroupId": "sg-8efb7a7b976ad1220",
              "GroupName": "Launch-wizard-1"
            }
          ],
          "Ipv6Addresses": [],
          "MacAddress": "02:2b:38:b5:a7:a",
          "NetworkInterfaceId": "eni-08c4a1ab08674547",
          "OwnerId": "333458556630",
          "PrivateDnsName": "ip-172-31-15-113.ec2.internal",
          "PrivateIpAddress": "172.31.15.113",
          "PrivateIpAddresses": [
            {
              "PrivateIpAddress": "172.31.15.113"
            }
          ]
        }
      ]
    }
  ]
}
```

Consultou especificamente uma instância EC2 a partir do seu identificador único (**InstanceId**), retornando apenas os dados relacionados àquela máquina virtual.


- aws ec2 describe-instances --output yaml --region us-east-1

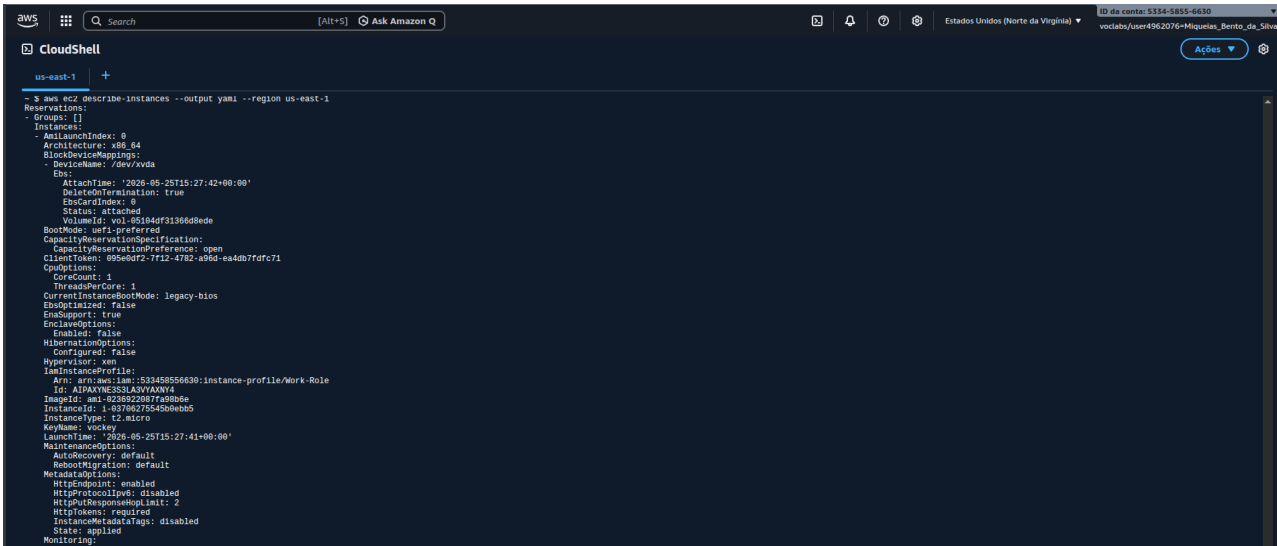

```
- $ aws ec2 describe-instances --output yaml --region us-east-1
Reservations:
- Groups: []
  Instances:
  - Architecture: x86_64
    BlockDeviceMappings:
    - DeviceName: /dev/xvda
      Ebs:
        AttachTime: '2026-05-25T15:27:42+00:00'
        DeleteOnTermination: true
        Encrypted: 0
        Status: attached
        VolumeId: vol-05194df3136dd8ede
    BootMode: uefi-preferred
    CapacityReservationSpecification:
      CapacityReservationPreference: open
    ClientToken: 095ebd72-7f12-4782-a96d-ea4db77dfc71
    CpuOptions:
      CoreCount: 1
      ThreadsPerCore: 1
    CurrentInstanceBootMode: legacy-bios
    EbsOptimized: false
    EnclaveOptions:
      Enabled: false
    HypervisorOptions:
      Configured: false
    InstanceProfile:
      Arn: arn:aws:iam::533458556630:instance-profile/Work-Role
      Id: AIPAYNES3SLA3VYANNV4
    ImageId: ami-0236922087f408bde
    InstanceId: i-037062756450eb0b5
    InstanceType: t2.micro
    KeyName: vockey
    LaunchTime: '2026-05-25T15:27:41+00:00'
    MaintenanceOptions:
      AutoRecovery: default
      RebootMigration: default
    MetadataOptions:
      HttpEndpoint: enabled
      HttpProtocolIpv6: disabled
      HttpPutResponseExpectLimit: 2
      HttpTokens: required
      InstanceMetadataTags: disabled
      State: applied
    Monitoring:
      State: disabled
```

Listou as instâncias EC2 da região **us-east-1**, exibindo os resultados no formato YAML para facilitar a leitura estruturada das informações.


- aws ec2 describe-instances --filters "Name=instance-type,Values=t2.nano"

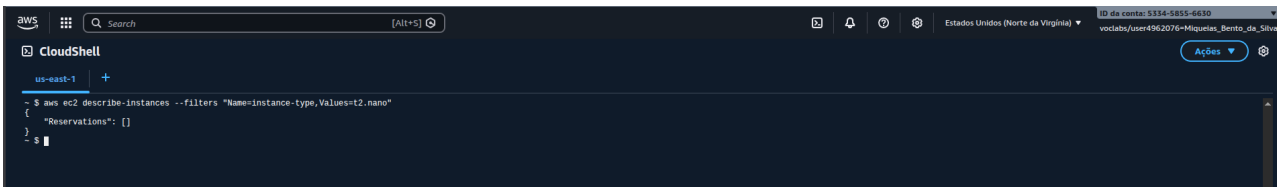

```
- $ aws ec2 describe-instances --filters "Name=instance-type,Values=t2.nano"
{
  "Reservations": []
}
```

Listou apenas as instâncias EC2 que possuíam o tipo **t2.nano**, permitindo identificar máquinas com essa configuração específica.
Minha VM não foi listada aqui.

- aws ec2 describe-instances --filters "Name=instance-type,Values=t3.micro"

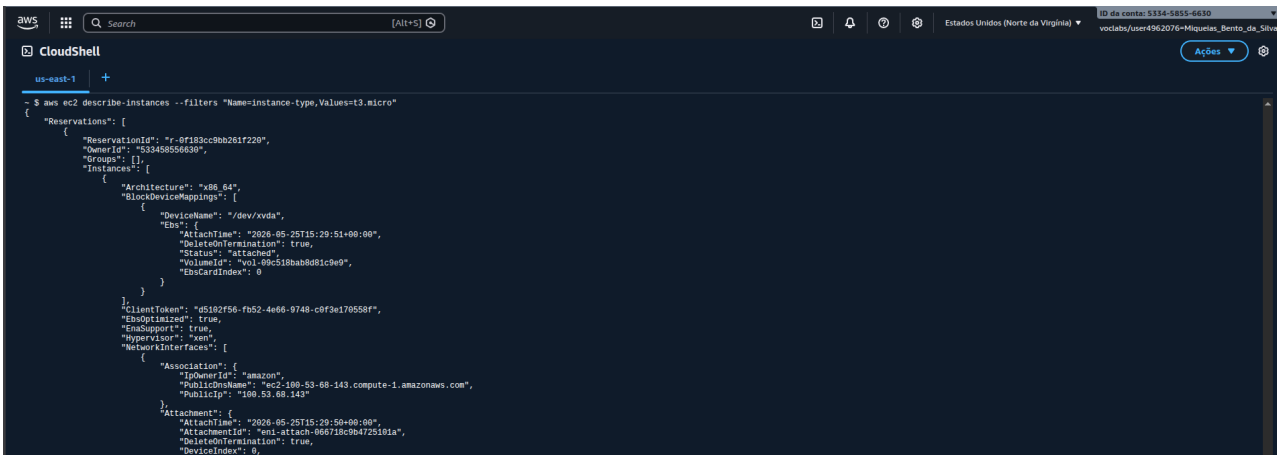


```
- $ aws ec2 describe-instances --filters "Name=instance-type,Values=t3.micro"
{
  "Reservations": [
    {
      "ReservationId": "r-0f183cc9bb261f7220",
      "OwnerId": "533458556630",
      "Groups": [],
      "Instances": [
        {
          "Architecture": "x86_64",
          "BlockDeviceMappings": [
            {
              "DeviceName": "/dev/xvda",
              "Ebs": {
                "AttachTime": "2026-05-25T15:29:51+00:00",
                "DeleteOnTermination": true,
                "Status": "attached",
                "VolumeId": "vol-09c518bab8081c9e9",
                "EbsCardIndex": 0
              }
            }
          ],
          "ClientToken": "d5182f56-fb52-4e66-9748-c0f3e170558f",
          "EbsOptimized": true,
          "EnclaveOptions": {
            "Enabled": true
          },
          "Hypervisor": "xen",
          "NetworkInterfaces": [
            {
              "Association": {
                "IpOwnerId": "amazon",
                "PublicIp": "ec2-100.53.68.143.compute-1.amazonaws.com",
                "PublicIp": "100.53.68.143"
              },
              "Attachment": {
                "AttachTime": "2026-05-25T15:29:50+00:00",
                "AttachmentId": "eni-attach-066710c0a4725181a",
                "DeleteOnTermination": true,
                "DeviceIndex": 0,

```

Listou exclusivamente as instâncias do tipo **t3.micro**, retornando apenas máquinas virtuais compatíveis com esse perfil de hardware.
Minha VM foi listada aqui.

- aws ec2 describe-instances --filters "Name=tag:Name,Values=umNomeQualquerDiferenteDaMinhaMV"

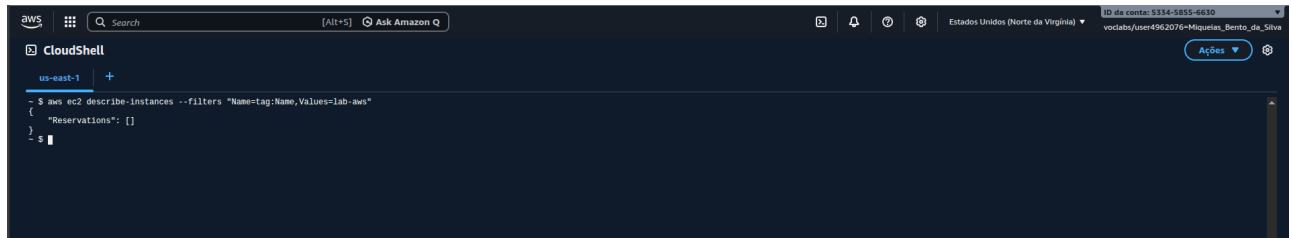


```
aws
CloudShell
us-east-1
$ aws ec2 describe-instances --filters "Name=tag:Name,Values=lab-aws"
{
  "Reservations": []
}
```

Buscou instâncias EC2 com uma tag **Name** diferente do nome da máquina virtual criada, demonstrando o funcionamento de filtros por tags na AWS.

Minha VM não foi listada aqui.

- **aws ec2 describe-instances --filters "Name=tag:Name,Values=oNomeDaMinhaVM"**

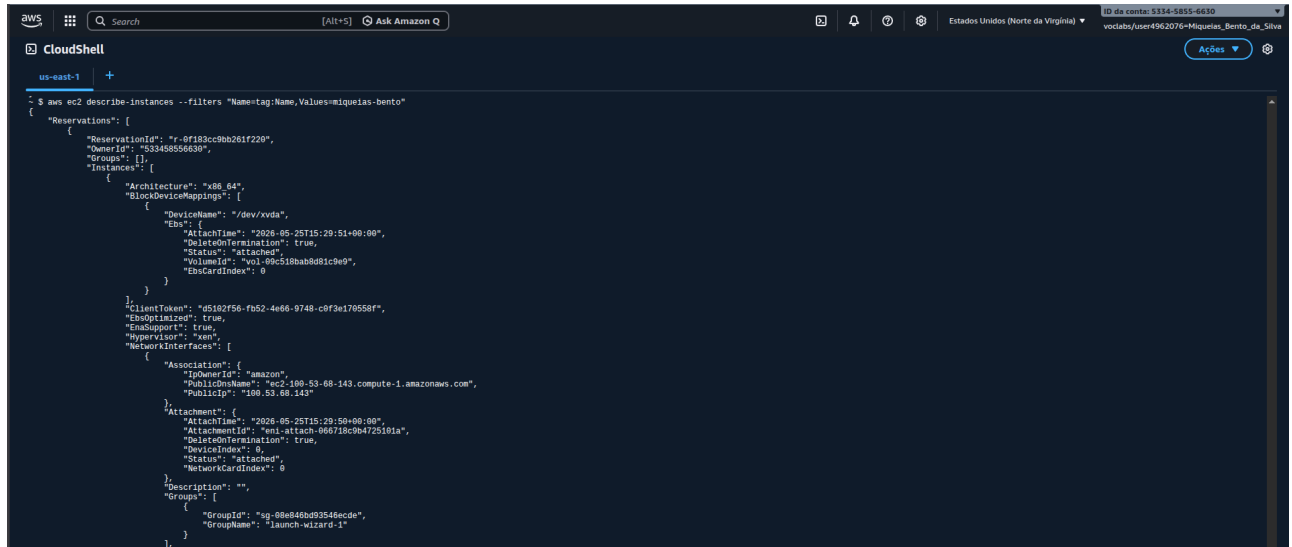


```
aws
CloudShell
us-east-1
$ aws ec2 describe-instances --filters "Name=tag:Name,Values=miquias-bento"
{
  "Reservations": [
    {
      "ReservationId": "r-0f183cc9b261f220",
      "OwnerId": "533458556630",
      "Groups": [],
      "Instances": [
        {
          "Architecture": "x86_64",
          "BlockDeviceMappings": [
            {
              "DeviceName": "/dev/xvda",
              "Ebs": {
                "AttachTime": "2026-05-25T15:29:51+00:00",
                "DeleteOnTermination": true,
                "Status": "attached",
                "VolumeId": "vol-09c518bab8d81c9e9",
                "EbsCardIndex": 0
              }
            }
          ],
          "ClientToken": "d5102f56-fb52-4e66-9748-c0f3e170558f",
          "EbsOptimized": true,
          "EnaSupport": true,
          "Hypervisor": "xen",
          "NetworkInterfaces": [
            {
              "Association": {
                "IpOwnerId": "amazon",
                "PublicIp": "ec2-100-53-68-143.compute-1.amazonaws.com",
                "PublicIp": "100.53.68.143"
              },
              "Attachment": {
                "AttachTime": "2026-05-25T15:29:50+00:00",
                "AttachementId": "eni-attach-066718c0b4725101a",
                "DeleteOnTermination": true,
                "DeviceIndex": 0,
                "Status": "attached",
                "NetworkCardIndex": 0
              },
              "Description": "",
              "Groups": [
                {
                  "GroupId": "sg-98e4b0b93546ecde",
                  "GroupName": "launch-wizard-1"
                }
              ]
            }
          ]
        }
      ]
    }
  ]
}
```

Localizou a instância EC2 criada no laboratório por meio da tag **Name**, retornando apenas a máquina virtual correspondente.

Minha VM foi listada aqui.

- **aws ec2 describe-instances --filters "Name=tag:Name,Values=oNomeDaMinhaVM" --output yaml**

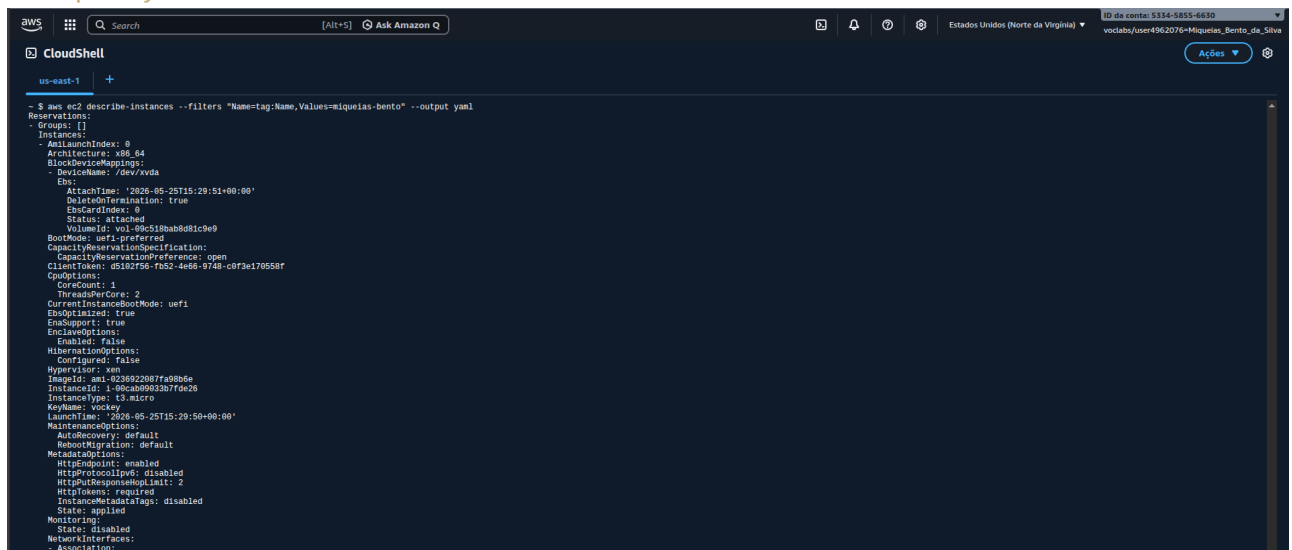

```
aws
CloudShell
us-east-1
$ aws ec2 describe-instances --filters "Name=tag:Name,Values=miquias-bento" --output yaml
- Groups: []
- Instances:
  - Architecture: x86_64
    Attachment:
      AttachTime: '2026-05-25T15:29:51+00:00'
      DeleteOnTermination: true
      EbsCardIndex: 0
      Status: attached
      VolumeId: vol-09c518bab8d81c9e9
    BootMode: uefi-preferred
    CapacityReservationSpecification:
      CapacityReservationReference: open
    ClientToken: d5102f56-fb52-4e66-9748-c0f3e170558f
    CpuOptions:
      CoreCount: 1
      ThreadsPerCore: 2
    CurrentInstanceBootMode: uefi
    EbsOptimized: true
    EnaSupport: true
    EnclaveOptions:
      Enabled: false
    HibernationOptions:
      Configured: false
    Hypervisor: xen
    ImageId: ami-0236922087fa9bb5e
    InstanceId: i-06b0b092b7f0e2b
    InstanceType: t3.micro
    KeyName: vockey
    LaunchTime: '2026-05-25T15:29:50+00:00'
    MaintenanceOptions:
      AutoRecovery: default
      RebootMigration: default
    MetadataOptions:
      HttpEndpoint: enabled
      HttpProtocolIpv6: disabled
      HttpPutResponseTimeout: 2
      HttpTokens: required
      InstanceMetadataTags: disabled
      State: applied
    Monitoring:
      State: disabled
    NetworkInterfaces:
    - Association:
      IpOwnerId: amazon
      PublicIp: ec2-100-53-68-143.compute-1.amazonaws.com
      PublicIp: 100.53.68.143
      Attachment:
        AttachTime: '2026-05-25T15:29:50+00:00'
        AttachmentId: eni-attach-066718c0b4725101a
        DeleteOnTermination: true
        DeviceIndex: 0
        Status: attached
        NetworkCardIndex: 0
      Description: ''
      Groups:
      - GroupId: sg-98e4b0b93546ecde
        GroupName: launch-wizard-1
```

Consultou a instância EC2 pelo nome definido na tag **Name**, exibindo os resultados no formato YAML para melhor organização visual das informações retornadas.

Minha VM foi listada aqui.


- `aws ec2 describe-instances --query "Reservations[*].Instances[*].{Instance:InstanceId,Subnet:SubnetId}" --output json`



```
~ $ aws ec2 describe-instances --query "Reservations[*].Instances[*].{Instance:InstanceId,Subnet:SubnetId}" --output json
[
  {
    "Instance": "i-03706275545b0bb5",
    "Subnet": "subnet-0fc6ab53b681b1c0"
  },
  {
    "Instance": "i-00cab09033b7fde26",
    "Subnet": "subnet-01261d3cbbec0e45a"
  }
]
```

Extraiu apenas os identificadores das instâncias (`InstanceId`) e das sub-redes (`SubnetId`), utilizando consultas customizadas da AWS CLI e exibindo o resultado em formato JSON. Minha VM foi listada aqui.


- `aws ec2 describe-instances --filters Name=instance-type,Values=t2.micro --query Reservations[*].Instances[*].{InstanceId} --output text`

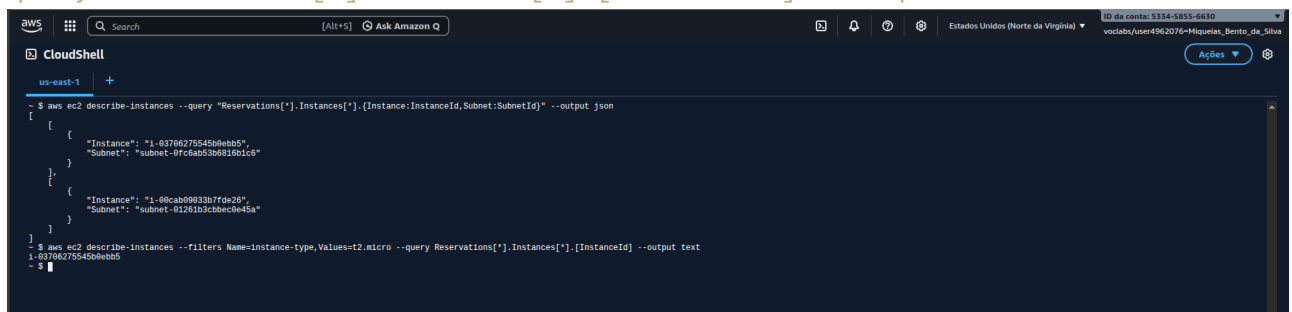

```
~ $ aws ec2 describe-instances --query "Reservations[*].Instances[*].{Instance:InstanceId,Subnet:SubnetId}" --output json
[
  {
    "Instance": "i-03706275545b0bb5",
    "Subnet": "subnet-0fc6ab53b681b1c0"
  },
  {
    "Instance": "i-00cab09033b7fde26",
    "Subnet": "subnet-01261d3cbbec0e45a"
  }
]
~ $ aws ec2 describe-instances --filters Name=instance-type,Values=t2.micro --query Reservations[*].Instances[*].{InstanceId} --output text
i-03706275545b0bb5
```

Listou somente os identificadores das instâncias do tipo `t2.micro`, apresentando os resultados em formato texto simplificado. Minha VM foi listada aqui.


- `aws ec2 start-instances --instance-ids i-1234567890abcdef0`

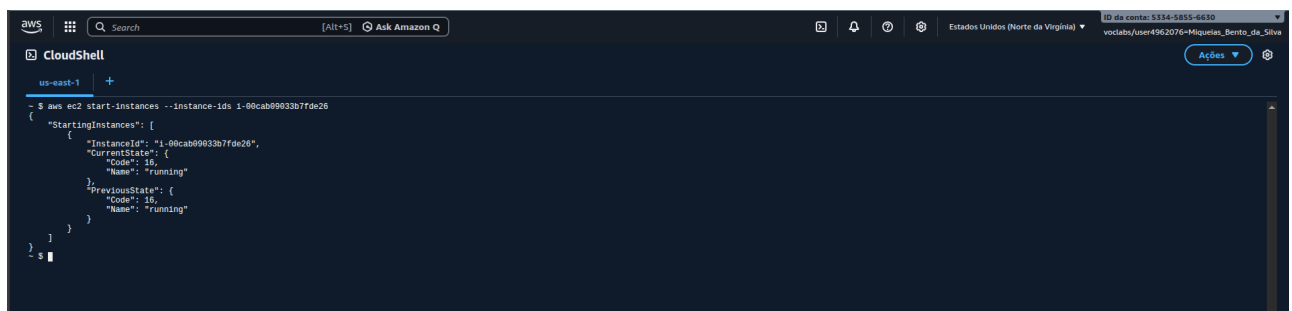

```
~ $ aws ec2 start-instances --instance-ids i-00cab09033b7fde26
{
  "StartingInstances": [
    {
      "InstanceId": "i-00cab09033b7fde26",
      "CurrentState": {
        "Code": 16,
        "Name": "running"
      },
      "PreviousState": {
        "Code": 16,
        "Name": "running"
      }
    }
  ]
}
```

Iniciou uma instância EC2 previamente desligada, alterando seu estado para execução (`running`).

- `aws ec2 stop-instances --instance-ids i-1234567890abcdef0`

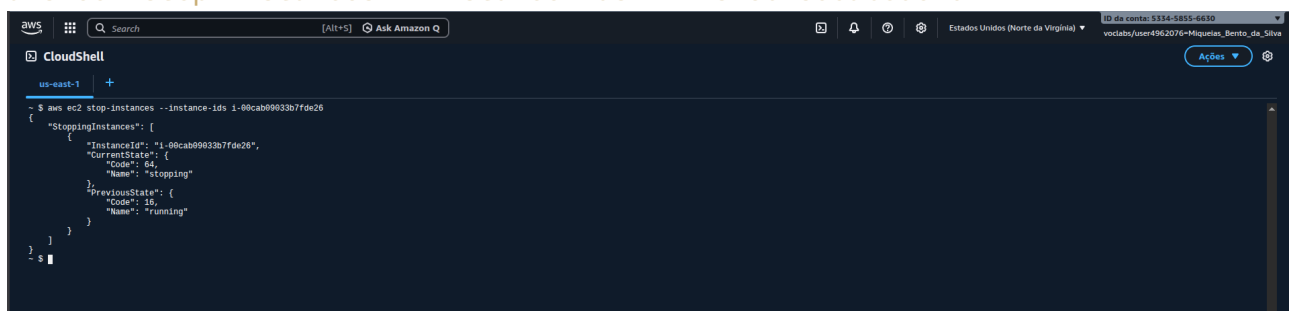


```
~ $ aws ec2 stop-instances --instance-ids i-00cab09033b7fde26
{
  "StoppingInstances": [
    {
      "InstanceId": "i-00cab09033b7fde26",
      "CurrentState": {
        "Code": 64,
        "Name": "stopping"
      },
      "PreviousState": {
        "Code": 16,
        "Name": "running"
      }
    }
  ]
}
```

Interrompeu a execução de uma instância EC2 em funcionamento, alterando seu estado para parada (`stopping`).

Questão 3


Os comandos a seguir criarão buckets no S3. Dependendo da disponibilidade de nomes de buckets, você criará dois. Ajuste os comandos conforme o nome e execute. Alguns comandos vão resultar num erro propositalmente. Relate o resultado de cada um. Pode ser textual, pode ser um print de parte da tela.

- `aws s3 ls`

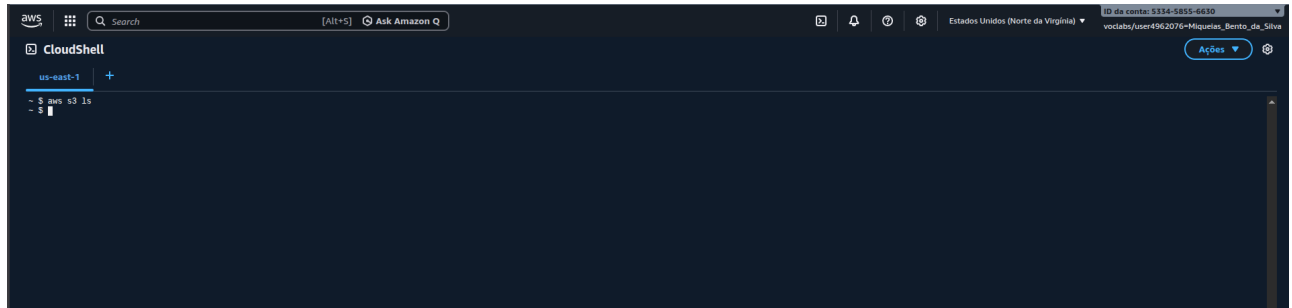

Deveria listar todos os buckets S3 disponíveis na conta AWS configurada no ambiente. Não apareceu nenhum bucket, pois ainda não criei nenhum.

- `aws s3 mb s3://bucketA`

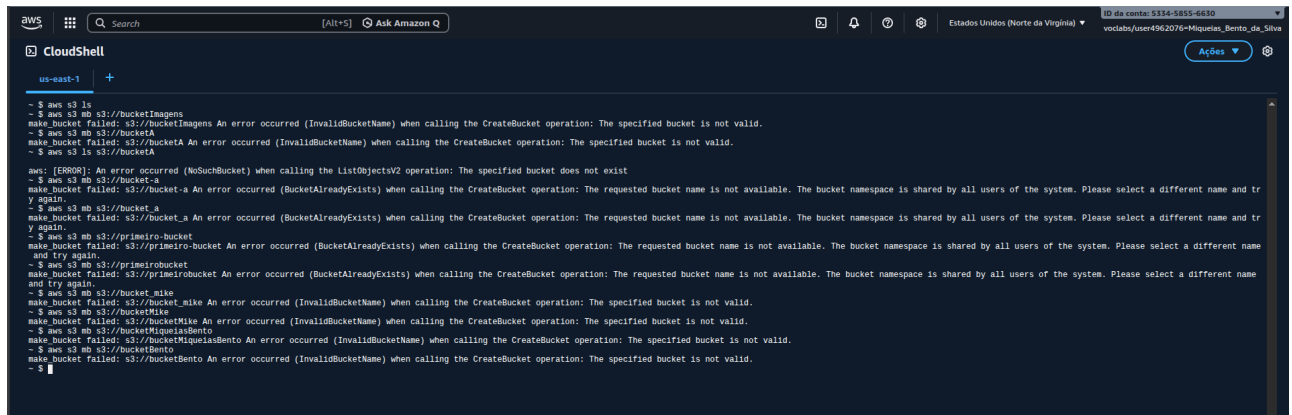


O comando apresentou erro porque os nomes de buckets no Amazon S3 precisam ser únicos globalmente. O nome informado já estava em uso ou já pertencia à conta utilizada. Ainda tentei várias vezes, só depois quando pesquisei foi que entendi.

- `aws s3 ls s3://bucketA`




O comando apresentou erro porque o bucket informado não existia no momento da execução.

- `cat > novo_arquivo.txt`

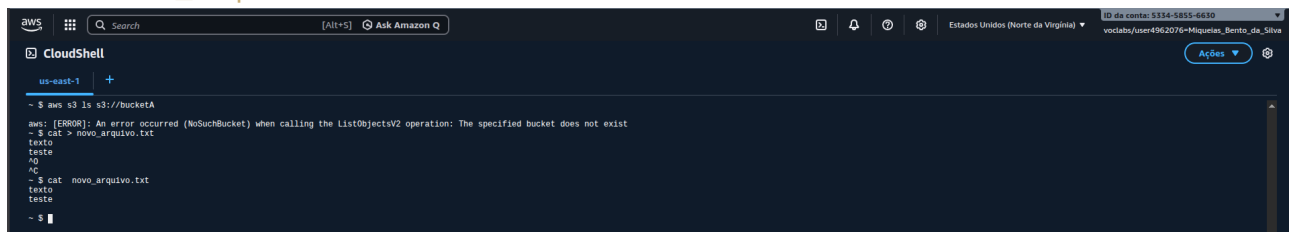

Criou um arquivo de texto chamado `novo_arquivo.txt` diretamente pelo terminal, permitindo inserir conteúdo manualmente.


- aws s3 cp novo_arquivo.txt s3://bucketA

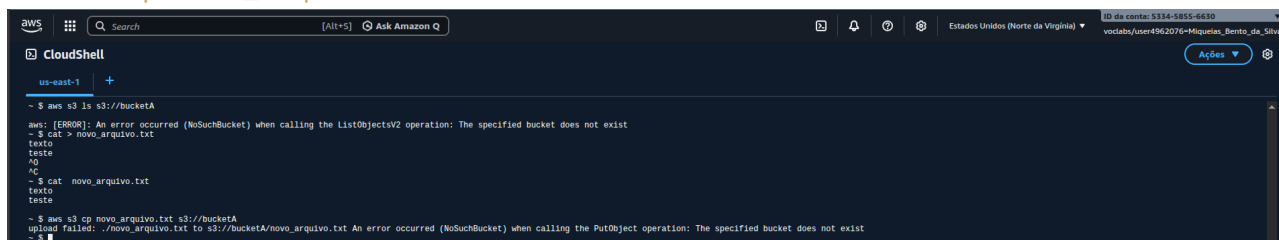

```
~ $ aws s3 ls s3://bucketA
aws: [ERROR]: An error occurred (NoSuchBucket) when calling the ListObjectsV2 operation: The specified bucket does not exist
~ $ cat > novo_arquivo.txt
texto
testo
AQ
~ $ cat novo_arquivo.txt
texto
testo
~ $ aws s3 cp novo_arquivo.txt s3://bucketA
upload failed: ./novo_arquivo.txt to s3://bucketA/novo_arquivo.txt An error occurred (NoSuchBucket) when calling the PutObject operation: The specified bucket does not exist
~ $
```

O comando apresentou erro porque o bucket informado não existia no momento da execução.

- aws s3 rb s3://bucketA

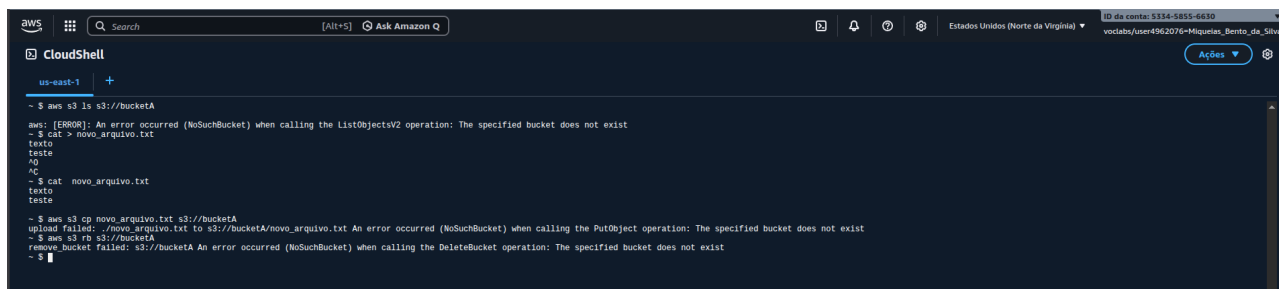

```
~ $ aws s3 ls s3://bucketA
aws: [ERROR]: An error occurred (NoSuchBucket) when calling the ListObjectsV2 operation: The specified bucket does not exist
~ $ cat > novo_arquivo.txt
texto
testo
AQ
~ $ cat novo_arquivo.txt
texto
testo
~ $ aws s3 cp novo_arquivo.txt s3://bucketA
upload failed: ./novo_arquivo.txt to s3://bucketA/novo_arquivo.txt An error occurred (NoSuchBucket) when calling the PutObject operation: The specified bucket does not exist
~ $ aws s3 rb s3://bucketA
remove_bucket failed: s3://bucketA An error occurred (NoSuchBucket) when calling the DeleteBucket operation: The specified bucket does not exist
~ $
```

O comando apresentou erro porque o bucket ainda continha objetos armazenados, e o Amazon S3 exige que o bucket esteja vazio antes de sua remoção.


- aws s3 cp s3://bucketA/novo_arquivo.txt velho_arquivo.txt



```
~ $ aws s3 cp s3://bucketA/novo_arquivo.txt velho_arquivo.txt
fatal error: An error occurred (404) when calling the HeadObject operation: Key "novo_arquivo.txt" does not exist
~ $
```

O comando apresentou erro porque o objeto informado não foi encontrado no bucket especificado.


- aws s3 mb s3://bucketB

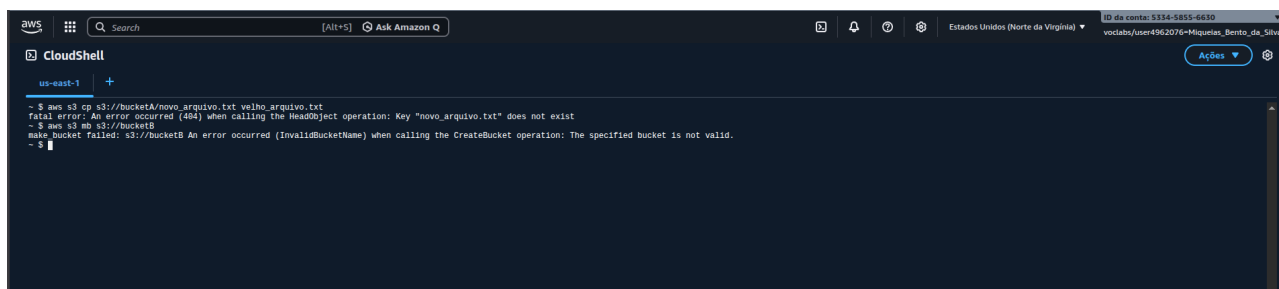

```
~ $ aws s3 cp s3://bucketA/novo_arquivo.txt velho_arquivo.txt
fatal error: An error occurred (404) when calling the HeadObject operation: Key "novo_arquivo.txt" does not exist
~ $ aws s3 mb s3://bucketB
make_bucket failed: s3://bucketB An error occurred (InvalidBucketName) when calling the CreateBucket operation: The specified bucket is not valid.
~ $
```

Também apresentou erro, pois o nome do bucket informado já estava em uso ou já pertencia à conta utilizada.


- aws s3 mv s3://bucketA/novo_arquivo.txt s3://bucketB/outro_novo_arquivo.txt

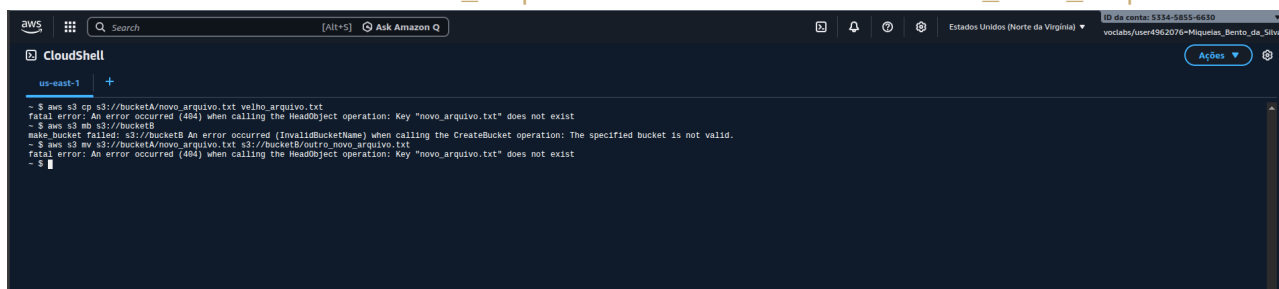

```
~ $ aws s3 cp s3://bucketA/novo_arquivo.txt velho_arquivo.txt
fatal error: An error occurred (404) when calling the HeadObject operation: Key "novo_arquivo.txt" does not exist
~ $ aws s3 mv s3://bucketA/novo_arquivo.txt s3://bucketB/outro_novo_arquivo.txt
fatal error: An error occurred (404) when calling the HeadObject operation: Key "novo_arquivo.txt" does not exist
~ $
```

O comando apresentou erro devido à inexistência do bucket informado ou restrições de acesso configuradas na conta AWS.


- **aws s3 rb s3://bucketA**

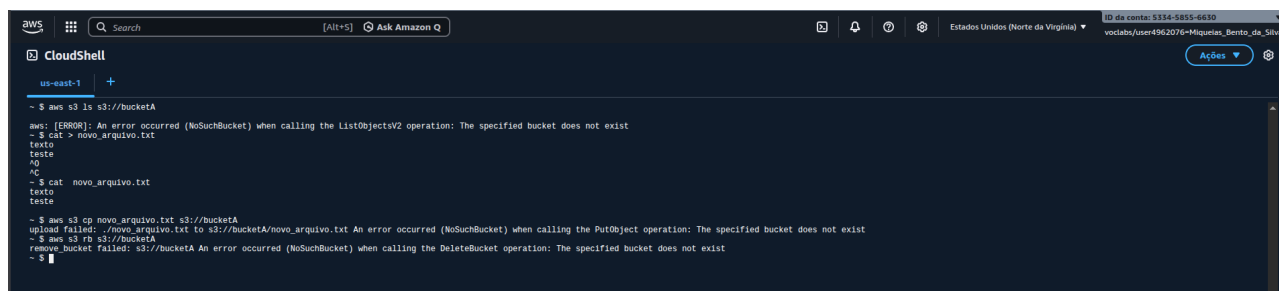A screenshot of the AWS CloudShell interface. The terminal shows a series of commands and their outputs. The first command is 'aws s3 ls s3://bucketA', which results in an error: '[ERROR]: An error occurred (NoSuchBucket) when calling the ListObjectsV2 operation: The specified bucket does not exist'. Subsequent commands include 'cat > novo_arquivo.txt', 'cat novo_arquivo.txt', and 'cp novo_arquivo.txt s3://bucketA', all of which also result in 'NoSuchBucket' errors. The final command is 'rm s3://bucketA', which results in an error: '[ERROR]: remove_bucket failed: Unable to delete all objects in the bucket, bucket will not be deleted.'

```
aws
CloudShell
us-east-1
~ $ aws s3 ls s3://bucketA
aws: [ERROR]: An error occurred (NoSuchBucket) when calling the ListObjectsV2 operation: The specified bucket does not exist
~ $ cat > novo_arquivo.txt
texto
teste
AQ
~ $ cat novo_arquivo.txt
texto
teste
~ $ aws s3 cp novo_arquivo.txt s3://bucketA
upload failed: ./novo_arquivo.txt to s3://bucketA/novo_arquivo.txt An error occurred (NoSuchBucket) when calling the PutObject operation: The specified bucket does not exist
~ $ aws s3 rb s3://bucketA
remove_bucket failed: s3://bucketA An error occurred (NoSuchBucket) when calling the DeleteBucket operation: The specified bucket does not exist
~ $
```

O comando apresentou erro porque o bucket informado já havia sido removido anteriormente.

- **aws s3 rb s3://bucketB --force**

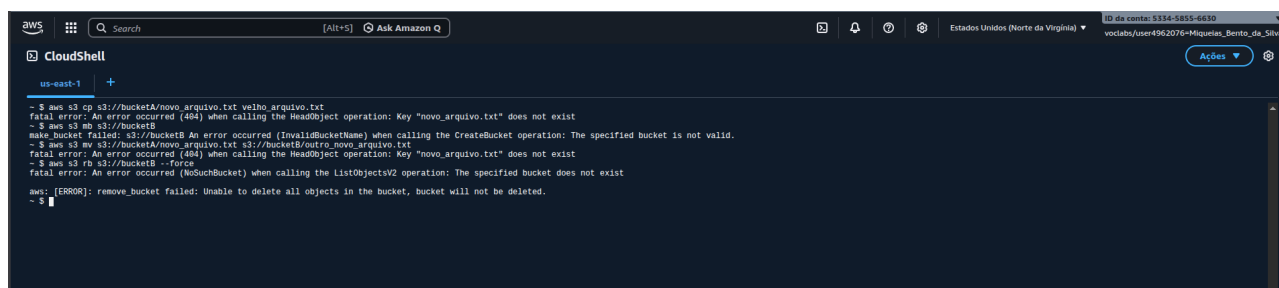A screenshot of the AWS CloudShell interface. The terminal shows a series of commands and their outputs. The first command is 'aws s3 cp s3://bucketA/novo_arquivo.txt s3://bucketB', which results in a 'fatal error: An error occurred (404) when calling the HeadObject operation: Key "novo_arquivo.txt" does not exist'. The next command is 'aws s3 mb s3://bucketB', which results in an error: 'make_bucket failed: s3://bucketB An error occurred (InvalidBucketName) when calling the CreateBucket operation: The specified bucket is not valid.'. This is followed by 'aws s3 mv s3://bucketA/novo_arquivo.txt s3://bucketB/outro_novo_arquivo.txt', which results in a 'fatal error: An error occurred (404) when calling the HeadObject operation: Key "novo_arquivo.txt" does not exist'. The final command is 'aws s3 rb s3://bucketB --force', which results in an error: '[ERROR]: remove_bucket failed: Unable to delete all objects in the bucket, bucket will not be deleted.'

```
aws
CloudShell
us-east-1
~ $ aws s3 cp s3://bucketA/novo_arquivo.txt s3://bucketB
fatal error: An error occurred (404) when calling the HeadObject operation: Key "novo_arquivo.txt" does not exist
~ $ aws s3 mb s3://bucketB
make_bucket failed: s3://bucketB An error occurred (InvalidBucketName) when calling the CreateBucket operation: The specified bucket is not valid.
~ $ aws s3 mv s3://bucketA/novo_arquivo.txt s3://bucketB/outro_novo_arquivo.txt
fatal error: An error occurred (404) when calling the HeadObject operation: Key "novo_arquivo.txt" does not exist
~ $ aws s3 rb s3://bucketB --force
[ERROR]: remove_bucket failed: Unable to delete all objects in the bucket, bucket will not be deleted.
~ $
```

O comando deveria remover automaticamente os objetos existentes no bucket antes de realizar sua exclusão definitiva utilizando a opção --force. Mas como o bucket não existia, o comando apresentou erro.