ARM-FM-vs-COMPILER-graphs

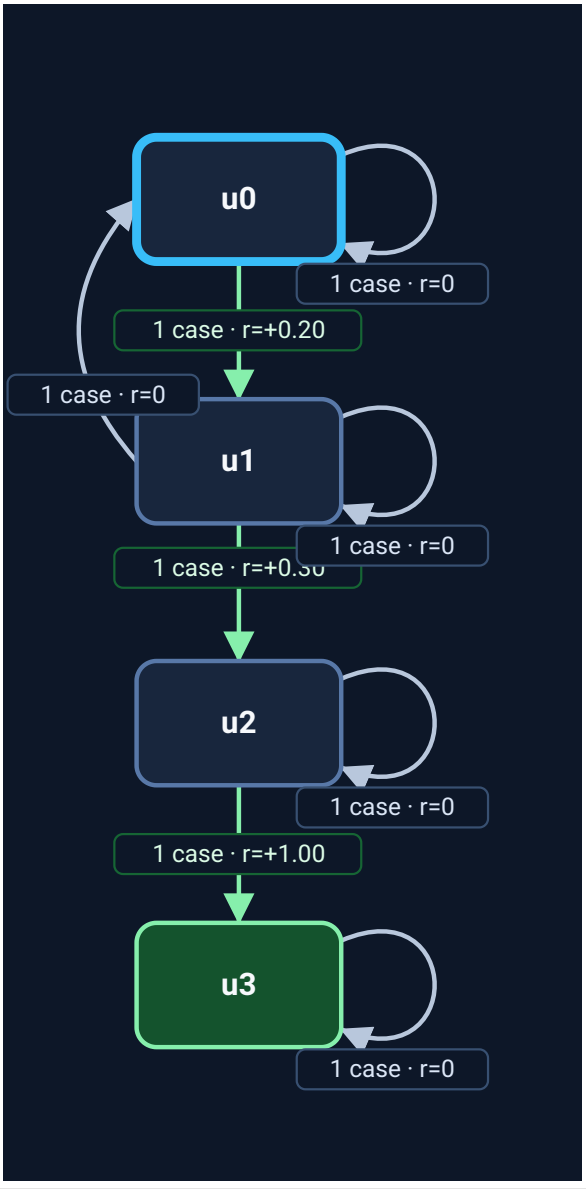
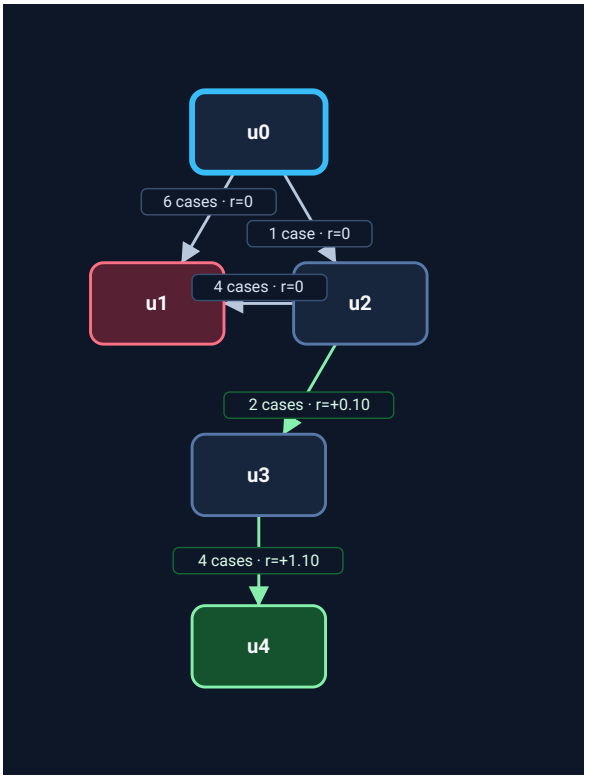
ARM-FM baseline vs the compiler on MiniGrid DoorKey — graphs

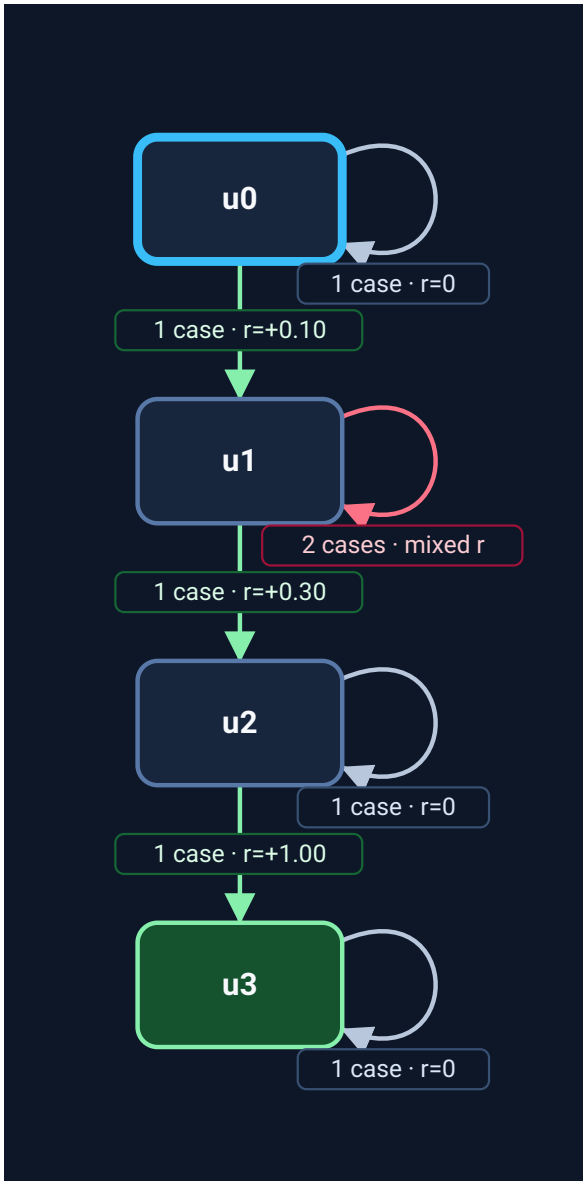
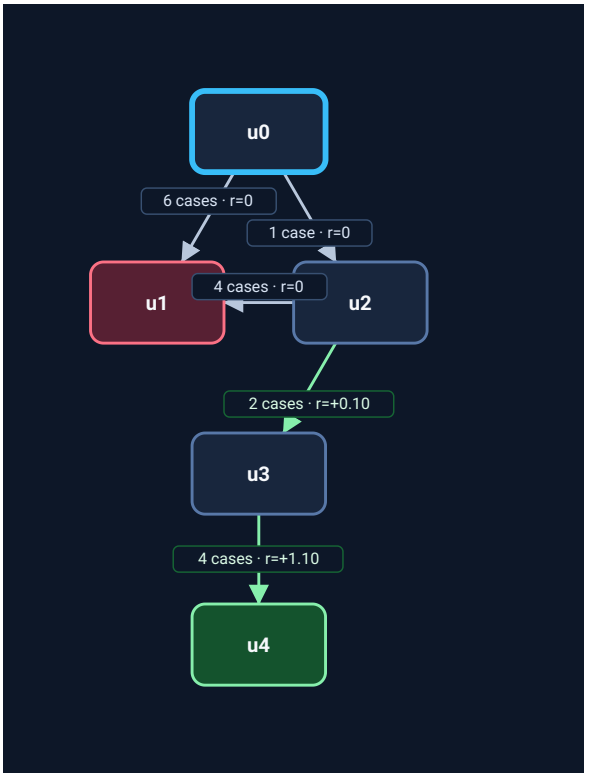
Left column: the ARM-FM baseline. Right column: this project's compiler. Rows: three independent runs of the same four tasks. Each cell is the Reward Machine written by that run, rendered to SVG by `app/scripts/render_rm.py` ; click an image to open the full-size SVG.

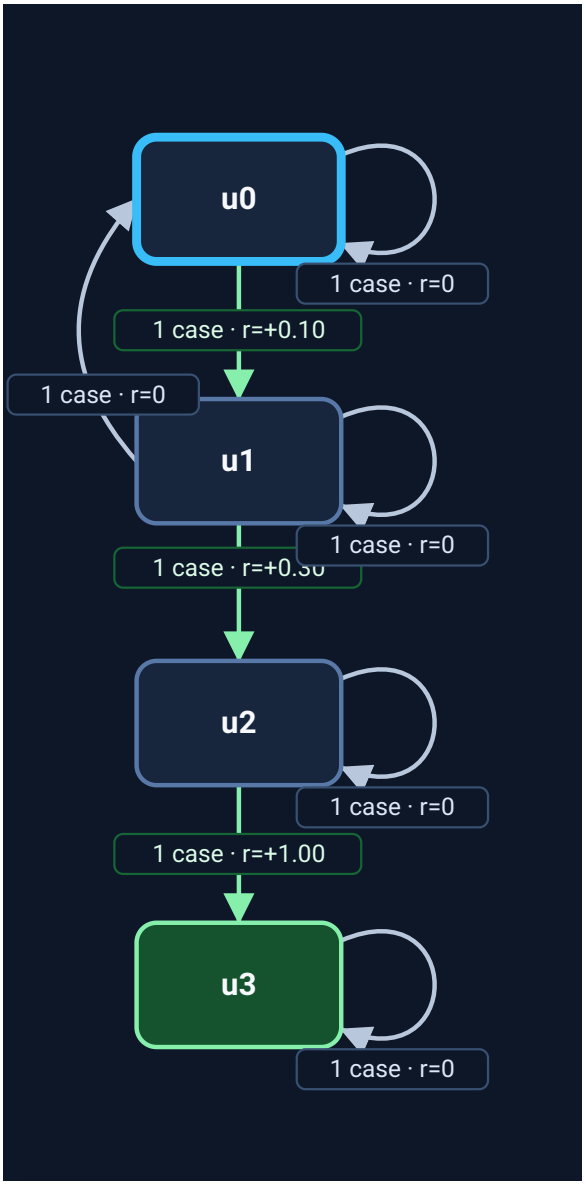
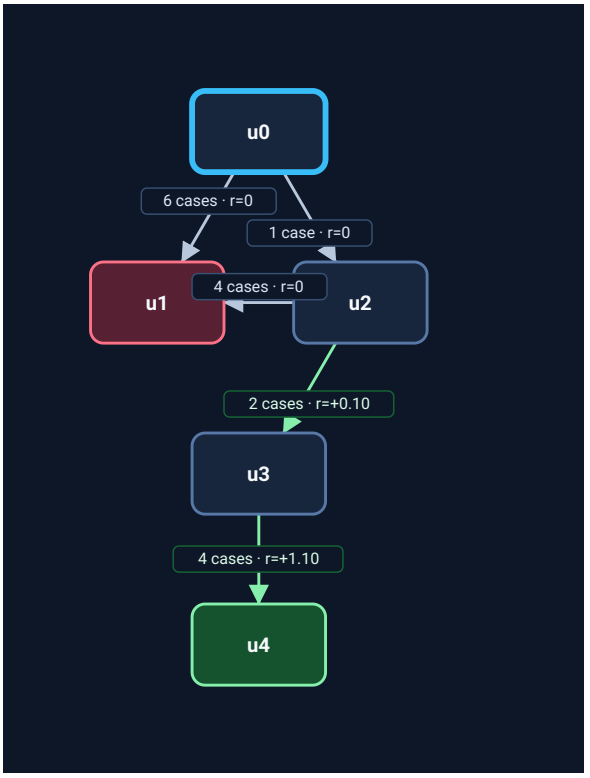
The Reward Machine text, per-task analysis, tabulations, critic findings, and timing are in `ARM-FM-vs-COMPILER.md` . Raw artifacts live under `docs/artifacts/arm-fm-vs-compiler/` , and every run records its own `run-log.json` .

---

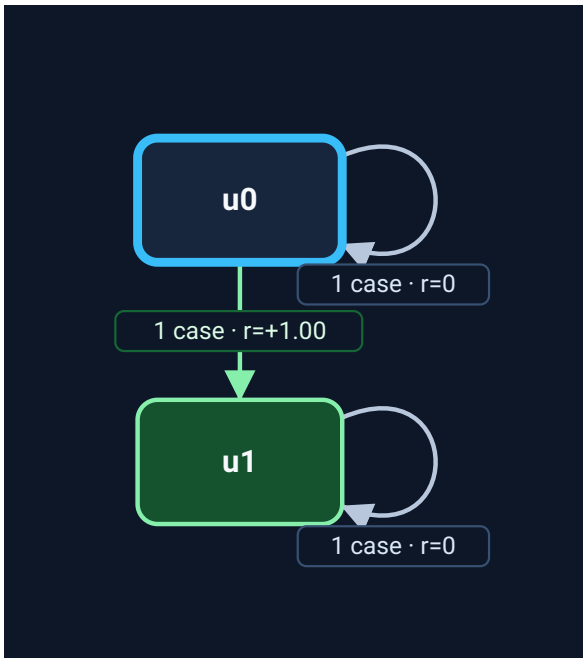
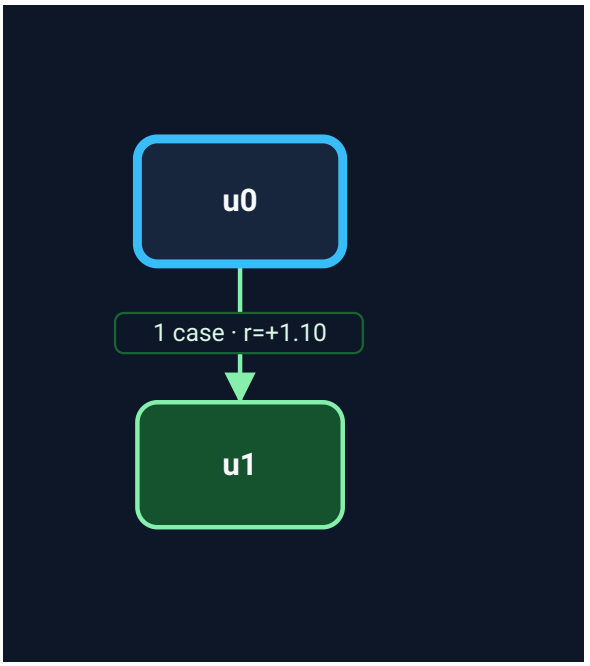
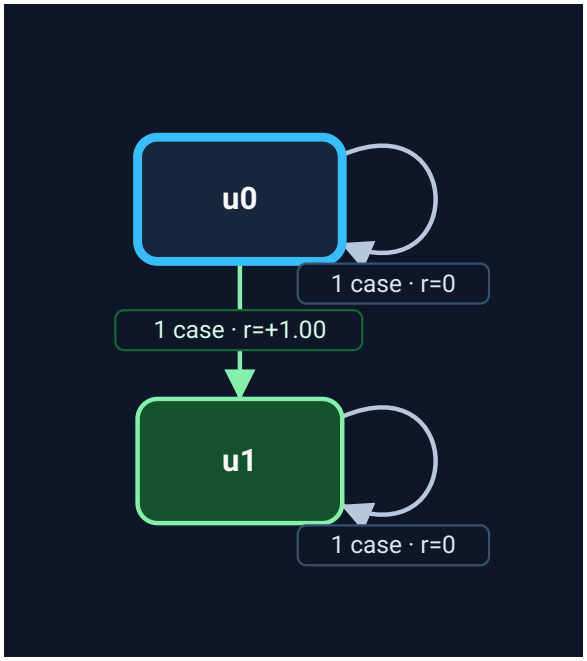
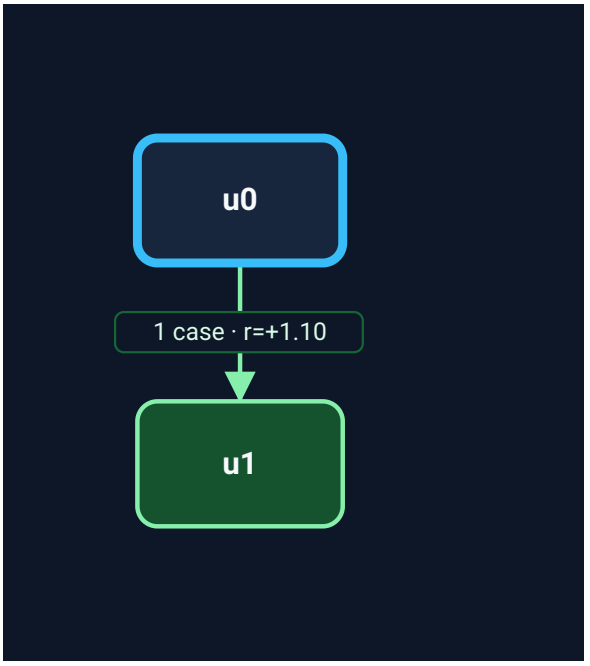
1. `Use the key to open the door, then reach the goal.`

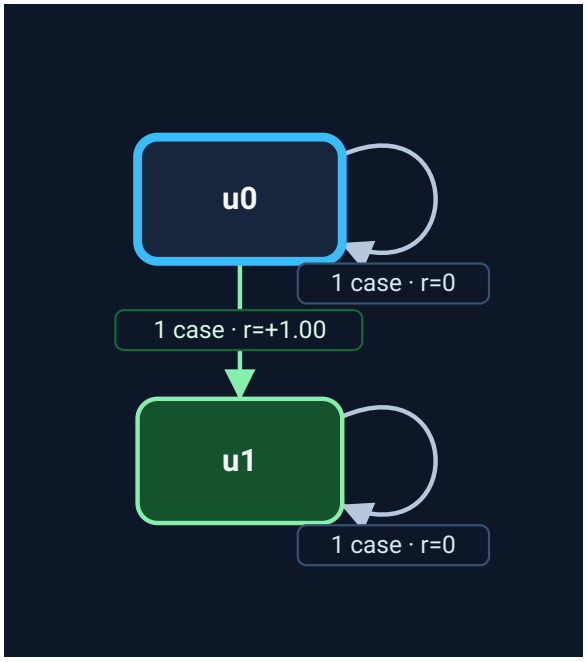
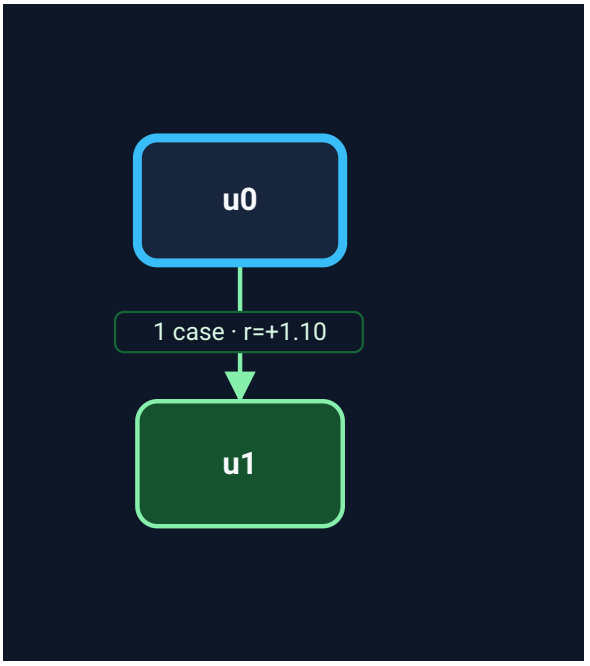
Run	ARM-FM baseline	Compiler
1		

Run	ARM-FM baseline	Compiler
2		

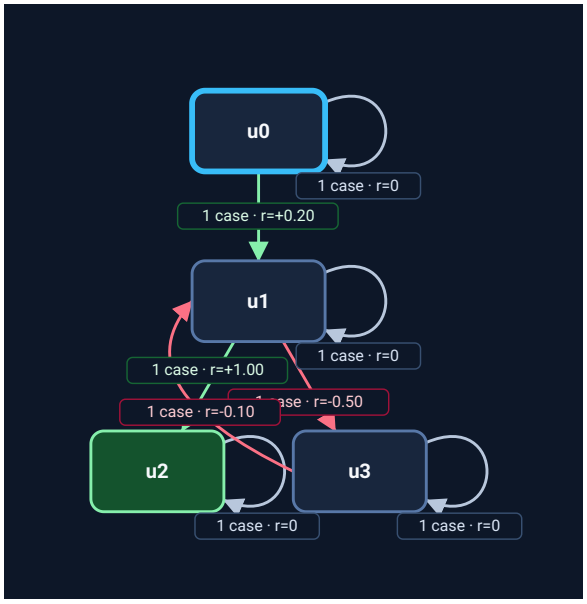
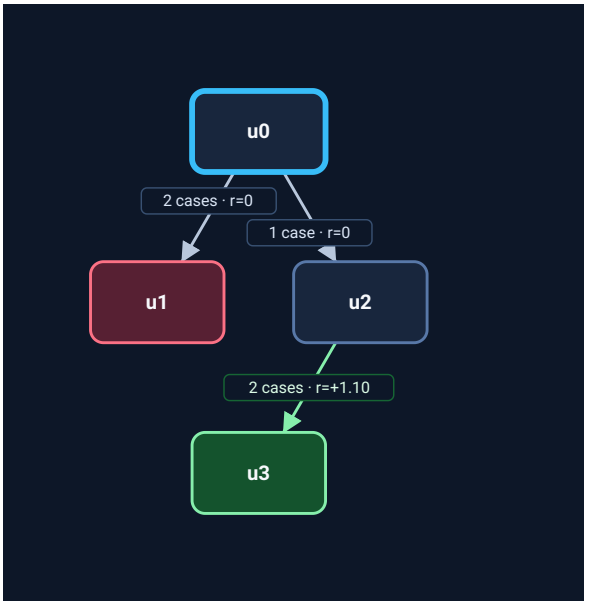
Run	ARM-FM baseline	Compiler
3		

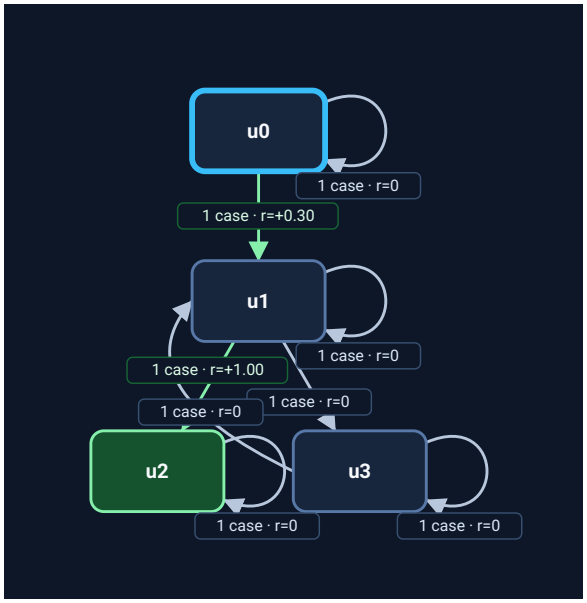
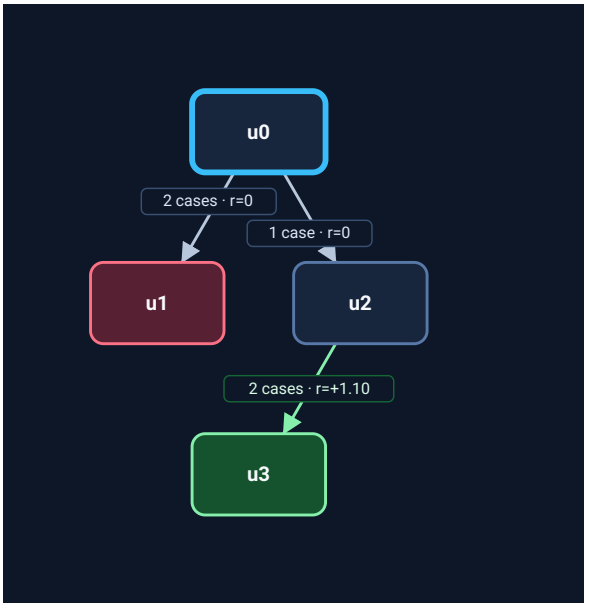
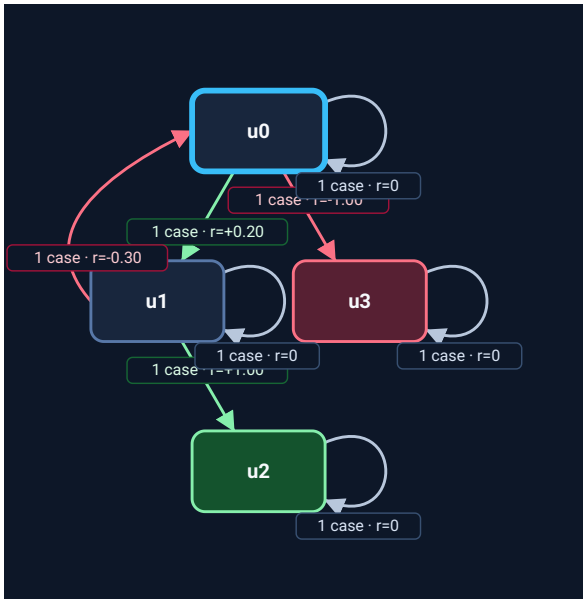
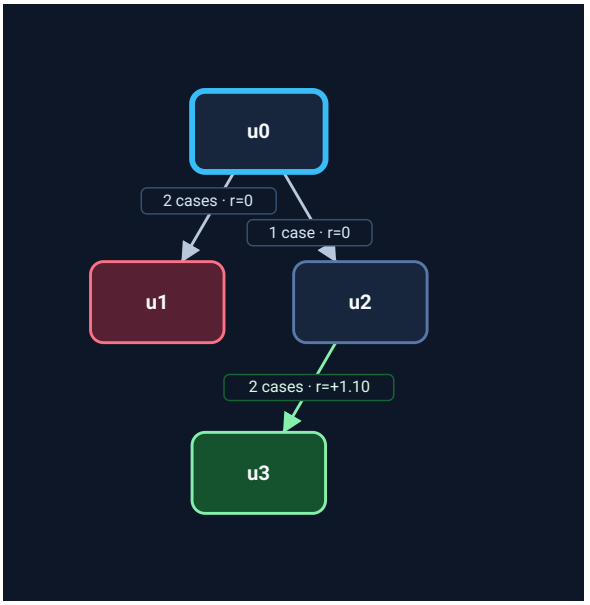
2. `Eventually acquire the key.`

Run	ARM-FM baseline	Compiler
1		
2		

Run	ARM-FM baseline	Compiler
3		

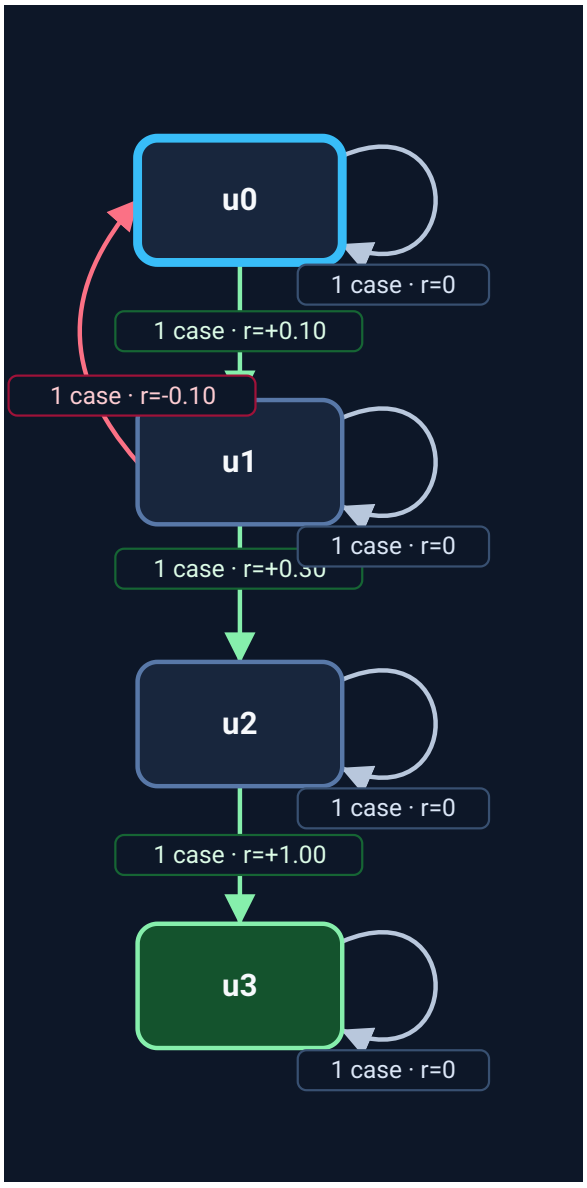
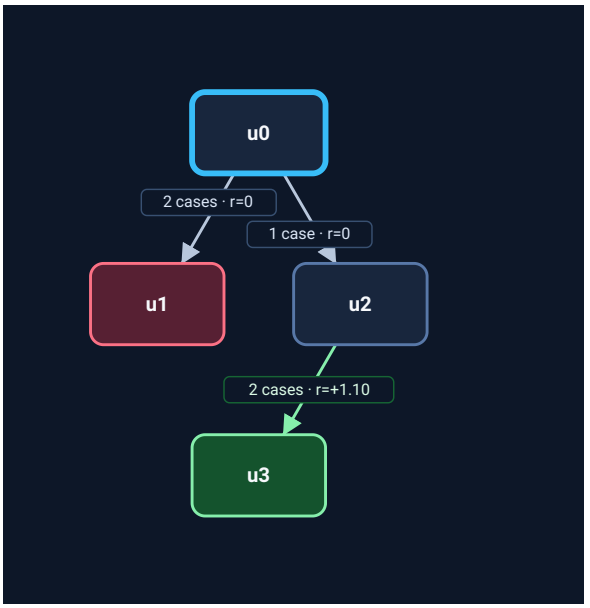
3. `Open the door only after acquiring the key.`

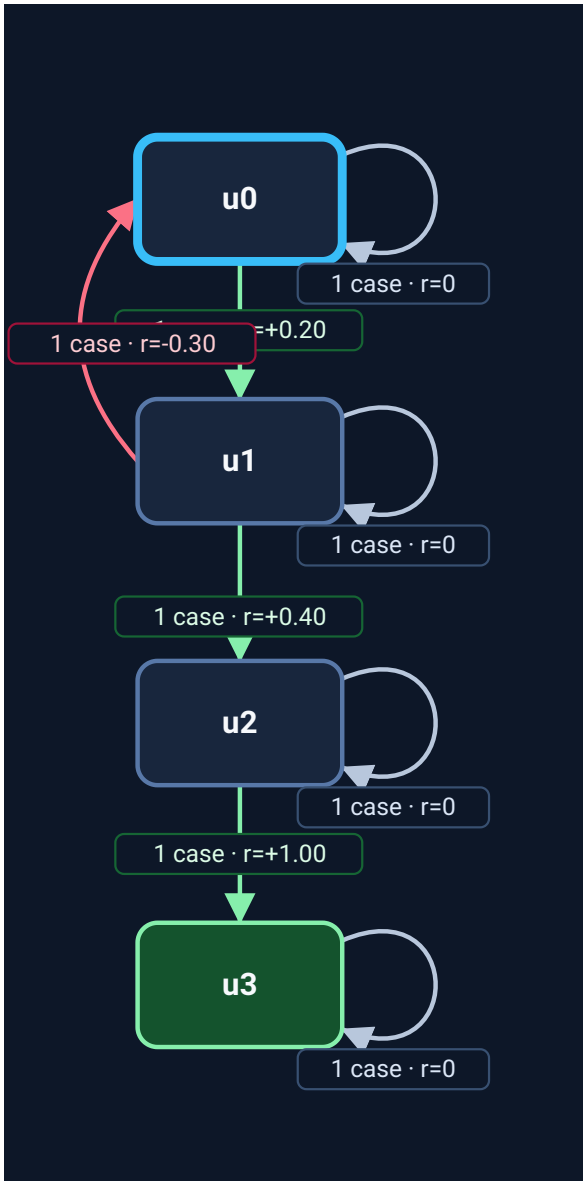
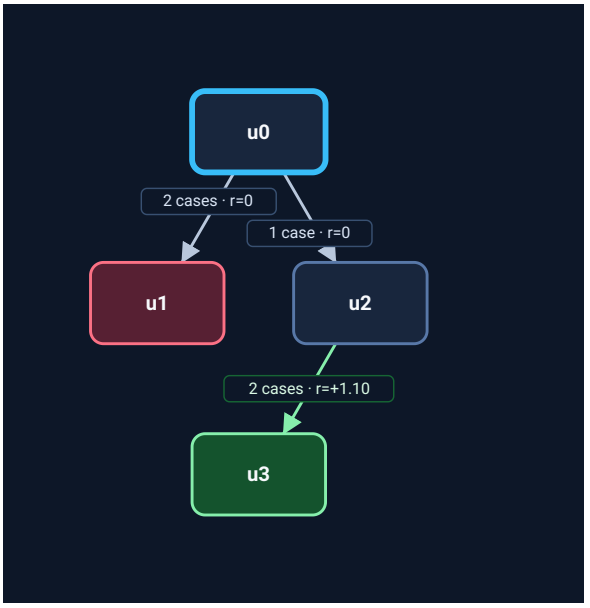
Run	ARM-FM baseline	Compiler
1		

Run	ARM-FM baseline	Compiler
2		
3		

---

4. `Reach the goal only after opening the door.`

Run	ARM-FM baseline	Compiler
1		

Run	ARM-FM baseline	Compiler
2		

Run	ARM-FM baseline	Compiler
3	