

Compte Rendu Programmer PHP



Sommaire:

[Exercice 1](#)

[Exercice 2](#)


[Partie 1](#)

[Partie 2](#)

[Exercice 3](#)

Exercise 1

Ecrivez une page PHP `multiplication.php` qui déclare une variable `$chiffre`, puis qui affiche la table de multiplication de ce chiffre.

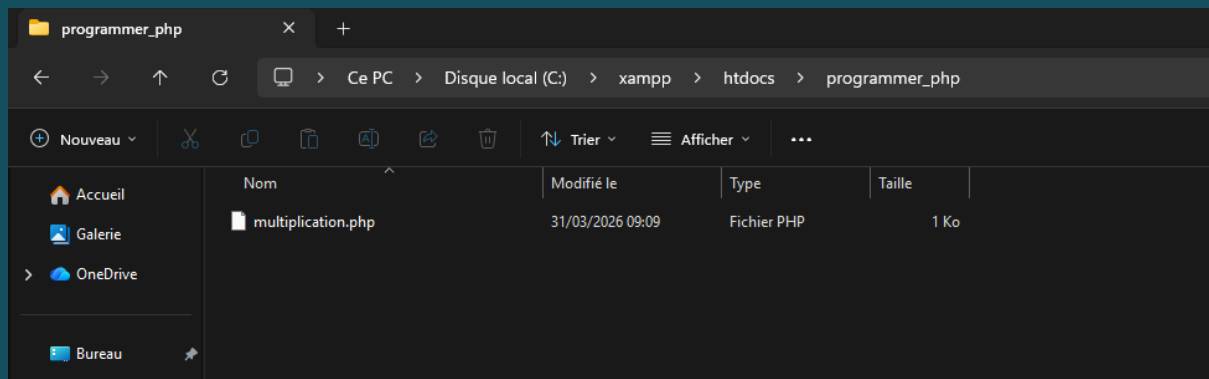

Code


```
multiplication.php X
multiplication.php
1  <!DOCTYPE html>
2  <html lang="fr">
3  <head>
4      <meta charset="UTF-8">
5      <title>Table de multiplication</title>
6  </head>
7  <body>
8
9      <?php
10         // 1. Déclaration de la variable
11         $chiffre = 7;
12
13         // 2. Affichage du titre
14         echo "<h1>La table de $chiffre</h1>";
15
16         // 3. Boucle pour afficher les résultats de 1 à 10
17         for ($i = 1; $i <= 10; $i++) {
18             $resultat = $chiffre * $i;
19             echo "$chiffre * $i = $resultat <br>";
20         }
21     ?>
22
23 </body>
24 </html>
```

Résultat





Exercice 2

Partie 1

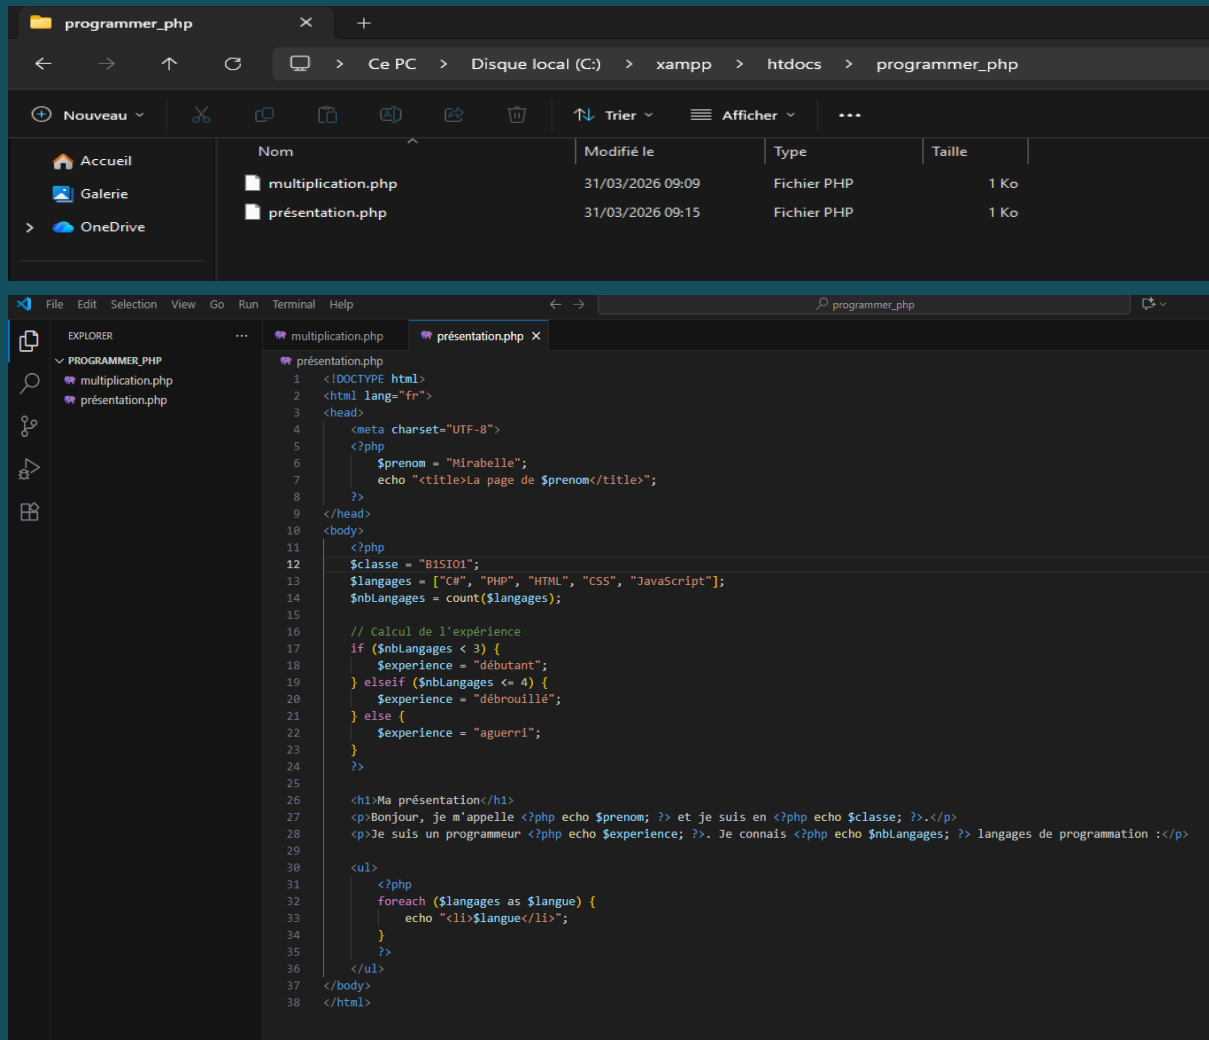

Partie 2

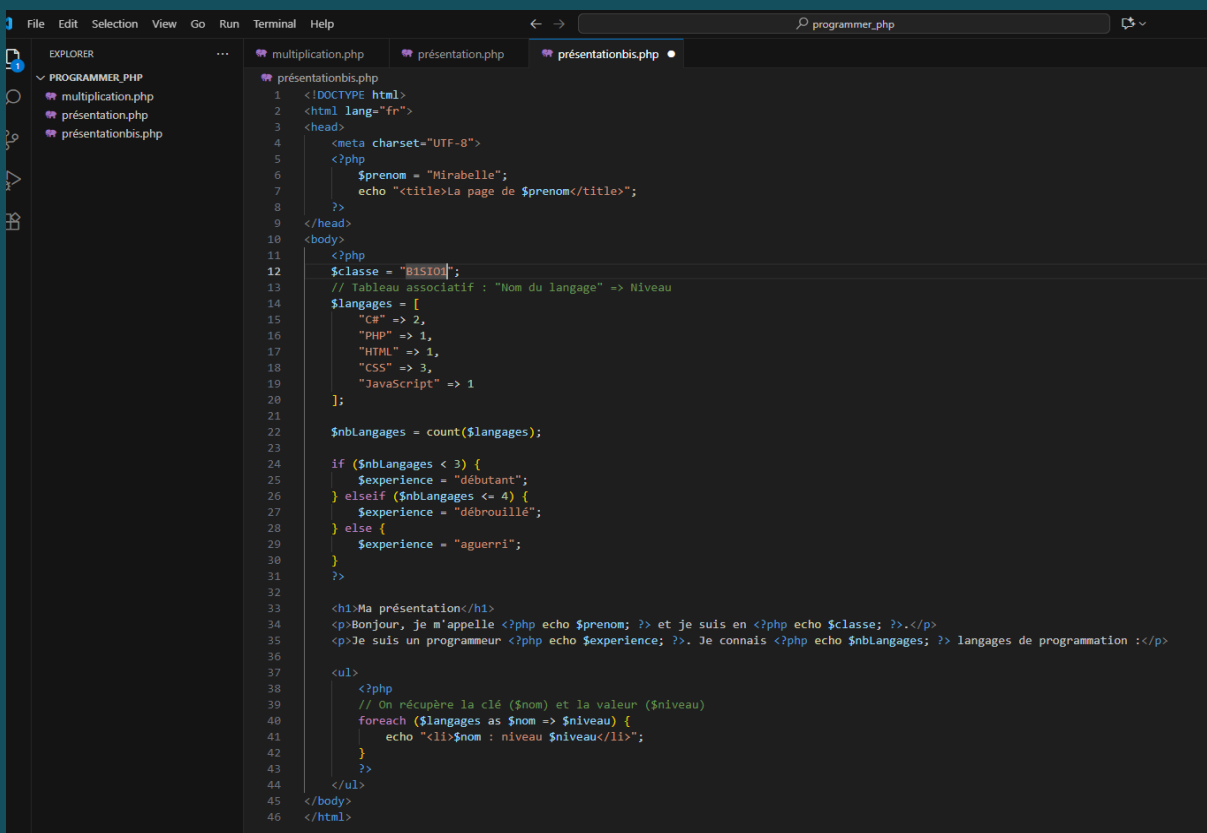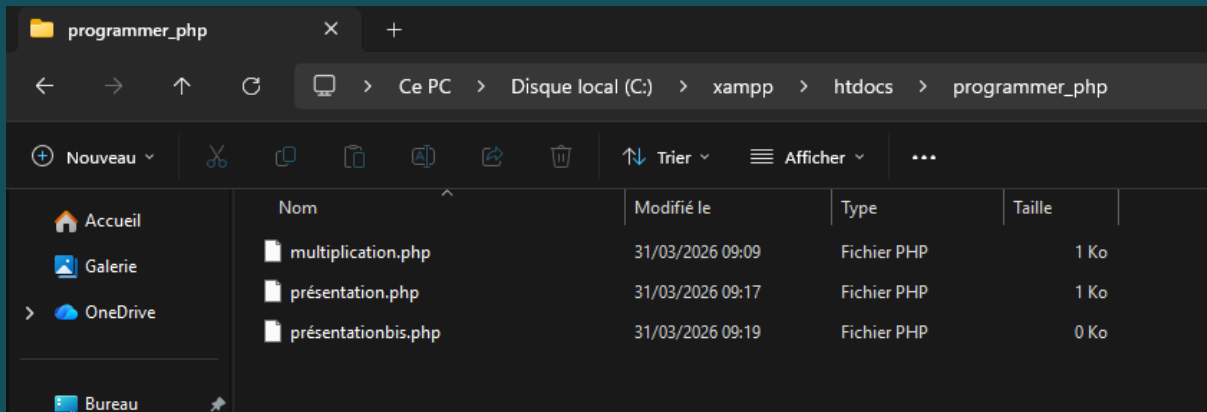

Exercise 3

The screenshot displays a web development environment. At the top, a file explorer window shows the directory structure: `programmer_php` > `Ce PC` > `Disque local (C:)` > `xampp` > `htdocs` > `programmer_php`. The file explorer lists four files: `clients.php`, `multiplication.php`, `présentation.php`, and `présentationbis.php`, all of which are PHP files. Below the file explorer, a code editor window is open, showing the content of `clients.php`. The code is a PHP script that generates an HTML table listing clients. The table has three columns: `Nom`, `Prénom`, and `Ville`. The data is stored in an associative array `$clients` and is iterated over using a `foreach` loop. The code is as follows:

```
1 <!DOCTYPE html>
2 <html lang="fr">
3 <head>
4     <meta charset="UTF-8">
5     <title>Liste des clients</title>
6     <style>
7         table, th, td {
8             border: 1px solid black;
9             border-collapse: collapse;
10            padding: 5px;
11        }
12    </style>
13 </head>
14 <body>
15
16     <h1>Liste des clients</h1>
17
18     <?php
19     // Le tableau fourni dans l'énoncé
20     $clients = array(
21         array('Nom' => 'Zette', 'Prénom' => 'Annie', 'Ville' => 'Paris'),
22         array('Nom' => 'Créyon', 'Prénom' => 'Mina', 'Ville' => 'Lyon'),
23         array('Nom' => 'Gator', 'Prénom' => 'Ali', 'Ville' => 'Marseille')
24     );
25     ?>
26
27     <table>
28         <thead>
29             <tr>
30                 <th>Nom</th>
31                 <th>Prénom</th>
32                 <th>Ville</th>
33             </tr>
34         </thead>
35         <tbody>
36             <?php
37             // On parcourt le tableau principal $clients
38             // Chaque élément $unClient est lui-même un tableau associatif
39             foreach ($clients as $unClient) {
40                 echo "<tr>";
41                 echo "<td>" . $unClient['Nom'] . "</td>";
42                 echo "<td>" . $unClient['Prénom'] . "</td>";
43                 echo "<td>" . $unClient['Ville'] . "</td>";
44                 echo "</tr>";
45             }
46             ?>
47         </tbody>
48     </table>
49
50 </body>
51 </html>
```

