


Page 10 / WPScan Enumeration

WPScan Enumeration

Enumerating a Website with WPScan

The --enumerate flag is used to enumerate various components of the WordPress application such as plugins, themes, and users. By default, $WPS can \ enumerates \ vulnerable \ plugins, themes, users, media, and \ backups. \ However, specific \ arguments \ can \ be \ supplied \ to \ restrict$ enumeration to specific components. For example, all plugins can be enumerated using the arguments --enumerate ap. Let's run a normal enumeration scan against a WordPress website.

WPScan Enumeration

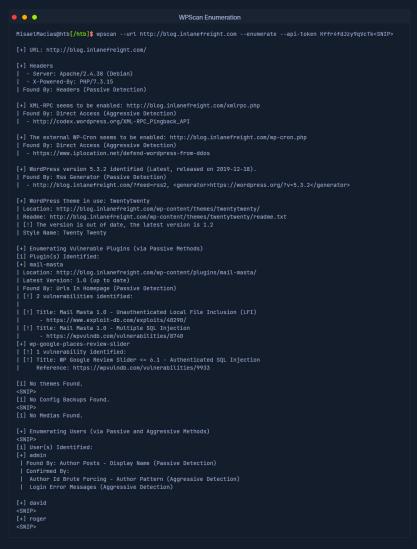

Cheat Sheet ? Go to Questions Table of Contents WordPress Structure WordPress User Roles WordPress Core Version Enumeration Plugins and Themes Enumeration Directory Indexing ₩ Login WPScan Overview 69 Exploiting a Vulnerable Plugin Attacking WordPress Users RCE via the Theme Editor Security Measures WordPress Hardening Skills Assessment Skills Assessment - WordPress My Workstation

WPScan uses various passive and active methods to determine versions and vulnerabilities, as shown in the scan output above.



