



Machine Learning

Large scale
machine learning


Learning with
large datasets

Machine learning and data

Classify between confusable words.

E.g., {to, two, too}, {then, than}.



For breakfast I ate _____ eggs.

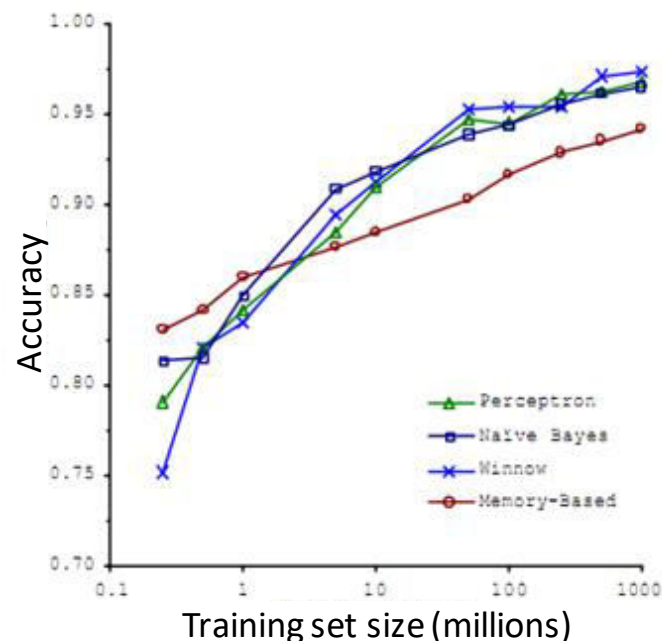


“It’s not who has the best algorithm that wins.
It’s who has the most data.”

Learning with large datasets

$$\theta_j := \theta_j - \alpha \frac{1}{m} \sum_{i=1}^m (h_{\theta}(x^{(i)}) - y^{(i)}) x_j^{(i)}$$

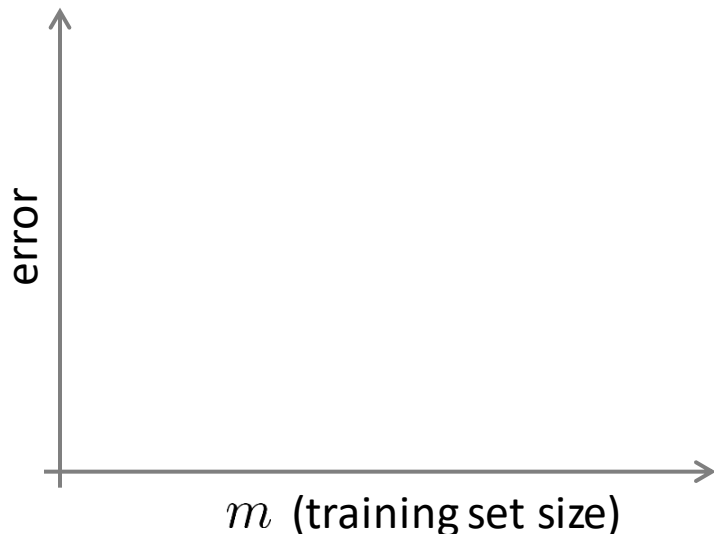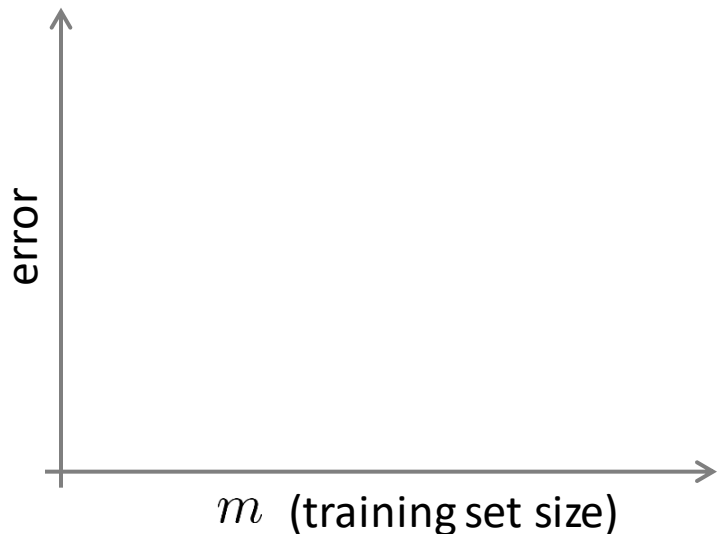

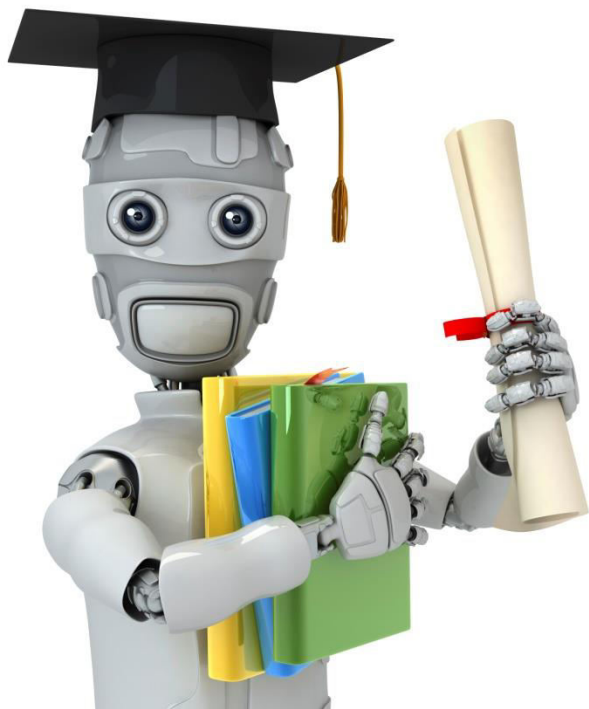

Machine Learning

Large scale machine learning

Stochastic gradient descent

Linear regression with gradient descent

$$h_{\theta}(x) = \sum_{j=0}^n \theta_j x_j$$


$$J_{train}(\theta) = \frac{1}{2m} \sum_{i=1}^m (h_{\theta}(x^{(i)}) - y^{(i)})^2$$

Repeat {

$$\theta_j := \theta_j - \alpha \frac{1}{m} \sum_{i=1}^m (h_{\theta}(x^{(i)}) - y^{(i)}) x_j^{(i)}$$

(for every $j = 0, \dots, n$)

}

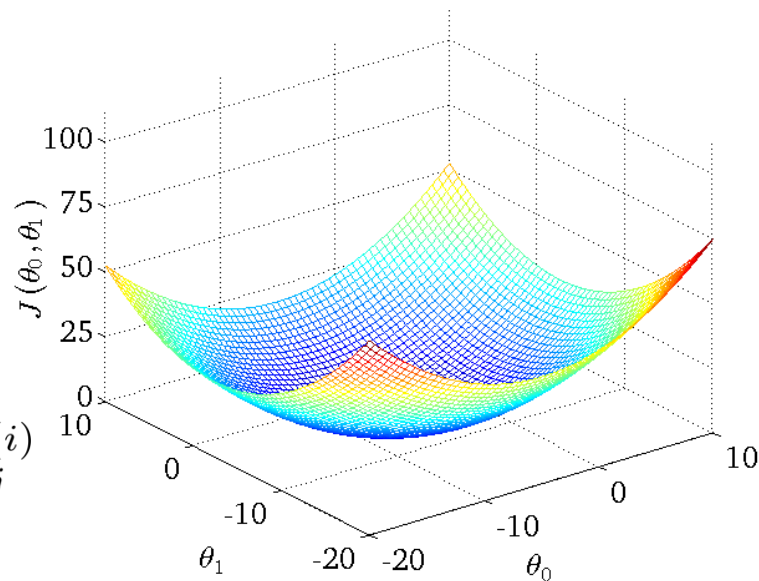

Linear regression with gradient descent

$$h_{\theta}(x) = \sum_{j=0}^n \theta_j x_j$$


$$J_{train}(\theta) = \frac{1}{2m} \sum_{i=1}^m (h_{\theta}(x^{(i)}) - y^{(i)})^2$$

Repeat {

$$\theta_j := \theta_j - \alpha \frac{1}{m} \sum_{i=1}^m (h_{\theta}(x^{(i)}) - y^{(i)}) x_j^{(i)}$$

(for every $j = 0, \dots, n$)

}

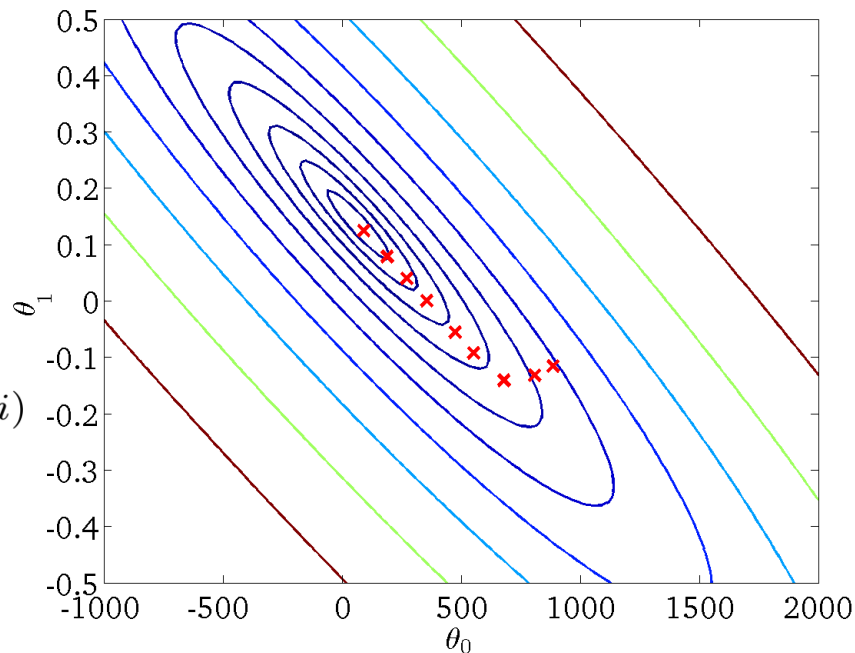

Batch gradient descent

$$J_{train}(\theta) = \frac{1}{2m} \sum_{i=1}^m (h_{\theta}(x^{(i)}) - y^{(i)})^2$$

Repeat {

$$\theta_j := \theta_j - \alpha \frac{1}{m} \sum_{i=1}^m (h_{\theta}(x^{(i)}) - y^{(i)}) x_j^{(i)}$$

(for every $j = 0, \dots, n$)

}

Stochastic gradient descent


$$cost(\theta, (x^{(i)}, y^{(i)})) = \frac{1}{2} (h_{\theta}(x^{(i)}) - y^{(i)})^2$$

$$J_{train}(\theta) = \frac{1}{m} \sum_{i=1}^m cost(\theta, (x^{(i)}, y^{(i)}))$$

Stochastic gradient descent

1. Randomly shuffle (reorder) training examples

2. Repeat {
 for $i := 1, \dots, m$ {
 $\theta_j := \theta_j - \alpha(h_{\theta}(x^{(i)}) - y^{(i)})x_j^{(i)}$
 (for every $j = 0, \dots, n$)
 }
}

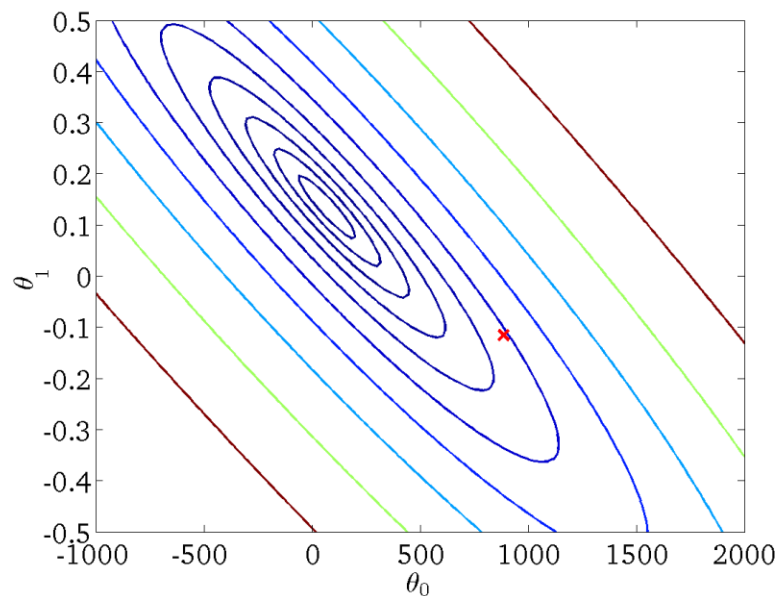



Machine Learning

Large scale
machine learning

Mini-batch
gradient descent

Mini-batch gradient descent

Batch gradient descent: Use all m examples in each iteration

Stochastic gradient descent: Use 1 example in each iteration

Mini-batch gradient descent: Use b examples in each iteration

Mini-batch gradient descent

Say $b = 10, m = 1000$.

Repeat {


for $i = 1, 11, 21, 31, \dots, 991$ {

$$\theta_j := \theta_j - \alpha \frac{1}{10} \sum_{k=i}^{i+9} (h_{\theta}(x^{(k)}) - y^{(k)}) x_j^{(k)}$$

(for every $j = 0, \dots, n$)

}

}

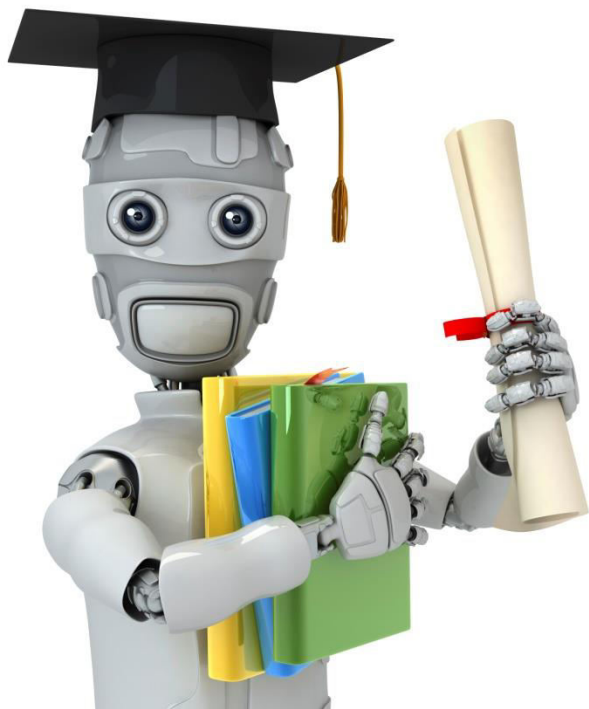

Machine Learning

Large scale machine learning

Stochastic gradient descent convergence

Checking for convergence

Batch gradient descent:

Plot $J_{train}(\theta)$ as a function of the number of iterations of gradient descent.

$$J_{train}(\theta) = \frac{1}{2m} \sum_{i=1}^m (h_{\theta}(x^{(i)}) - y^{(i)})^2$$

Stochastic gradient descent:

$$cost(\theta, (x^{(i)}, y^{(i)})) = \frac{1}{2} (h_{\theta}(x^{(i)}) - y^{(i)})^2$$

During learning, compute $cost(\theta, (x^{(i)}, y^{(i)}))$ before updating θ using $(x^{(i)}, y^{(i)})$.

Every 1000 iterations (say), plot $cost(\theta, (x^{(i)}, y^{(i)}))$ averaged over the last 1000 examples processed by algorithm.

Checking for convergence

Plot $cost(\theta, (x^{(i)}, y^{(i)}))$, averaged over the last 1000 (say) examples



No. of iterations



No. of iterations



No. of iterations




No. of iterations

Stochastic gradient descent

$$\text{cost}(\theta, (x^{(i)}, y^{(i)})) = \frac{1}{2}(h_{\theta}(x^{(i)}) - y^{(i)})^2$$

$$J_{\text{train}}(\theta) = \frac{1}{2m} \sum_{i=1}^m \text{cost}(\theta, (x^{(i)}, y^{(i)}))$$

1. Randomly shuffle dataset.
2. Repeat {
 for $i := 1, \dots, m$ {
 $\theta_j := \theta_j - \alpha(h_{\theta}(x^{(i)}) - y^{(i)})x_j^{(i)}$
 (for $j = 0, \dots, n$)
 }
}

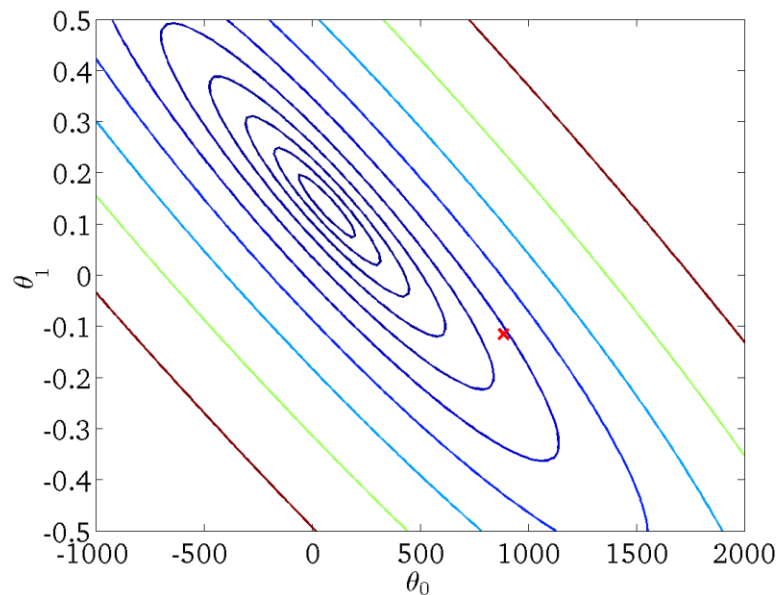


Learning rate α is typically held constant. Can slowly decrease α over time if we want θ to converge. (E.g. $\alpha = \frac{\text{const1}}{\text{iterationNumber} + \text{const2}}$)

Stochastic gradient descent

$$\text{cost}(\theta, (x^{(i)}, y^{(i)})) = \frac{1}{2}(h_{\theta}(x^{(i)}) - y^{(i)})^2$$

$$J_{\text{train}}(\theta) = \frac{1}{2m} \sum_{i=1}^m \text{cost}(\theta, (x^{(i)}, y^{(i)}))$$

1. Randomly shuffle dataset.
2. Repeat {
 for $i := 1, \dots, m$ {
 $\theta_j := \theta_j - \alpha(h_{\theta}(x^{(i)}) - y^{(i)})x_j^{(i)}$
 (for $j = 0, \dots, n$)
 }
}

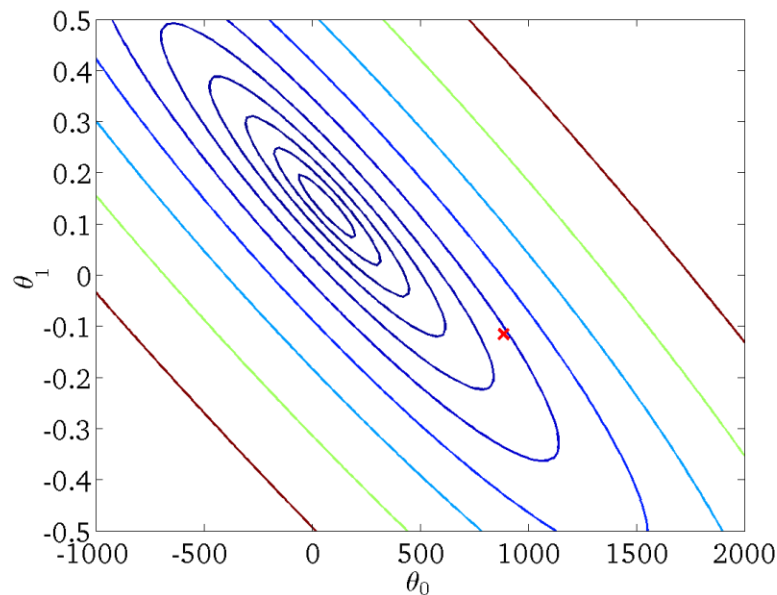

Learning rate α is typically held constant. Can slowly decrease α over time if we want θ to converge. (E.g. $\alpha = \frac{\text{const1}}{\text{iterationNumber} + \text{const2}}$)



Machine Learning

Large scale machine learning

Online learning

Online learning

Shipping service website where user comes, specifies origin and destination, you offer to ship their package for some asking price, and users sometimes choose to use your shipping service ($y = 1$), sometimes not ($y = 0$).

Features x capture properties of user, of origin/destination and asking price. We want to learn $p(y = 1|x; \theta)$ to optimize price.

Other online learning example:

Product search (learning to search)

User searches for “Android phone 1080p camera”

Have 100 phones in store. Will return 10 results.


x = features of phone, how many words in user query match name of phone, how many words in query match description of phone, etc.

$y = 1$ if user clicks on link. $y = 0$ otherwise.

Learn $p(y = 1|x; \theta)$.

Use to show user the 10 phones they’re most likely to click on.

Other examples: Choosing special offers to show user; customized selection of news articles; product recommendation; ...

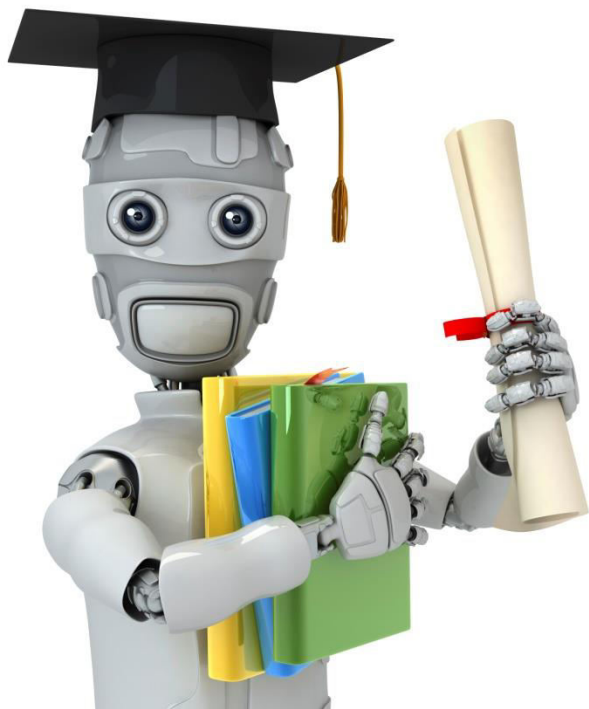

Machine Learning

Large scale machine learning

Map-reduce and data parallelism

Map-reduce

Batch gradient descent: $\theta_j := \theta_j - \alpha \frac{1}{400} \sum_{i=1}^{400} (h_{\theta}(x^{(i)}) - y^{(i)}) x_j^{(i)}$

Machine 1: Use $(x^{(1)}, y^{(1)}), \dots, (x^{(100)}, y^{(100)})$.

Machine 2: Use $(x^{(101)}, y^{(101)}), \dots, (x^{(200)}, y^{(200)})$.

$$temp_j^{(2)} = \sum_{i=101}^{200} (h_{\theta}(x^{(i)}) - y^{(i)}) \cdot x_j^{(i)}$$


Machine 3: Use $(x^{(201)}, y^{(201)}), \dots, (x^{(300)}, y^{(300)})$.

$$temp_j^{(3)} = \sum_{i=201}^{300} (h_{\theta}(x^{(i)}) - y^{(i)}) \cdot x_j^{(i)}$$

Machine 4: Use $(x^{(301)}, y^{(301)}), \dots, (x^{(400)}, y^{(400)})$.

$$temp_j^{(4)} = \sum_{i=301}^{400} (h_{\theta}(x^{(i)}) - y^{(i)}) \cdot x_j^{(i)}$$

Map-reduce

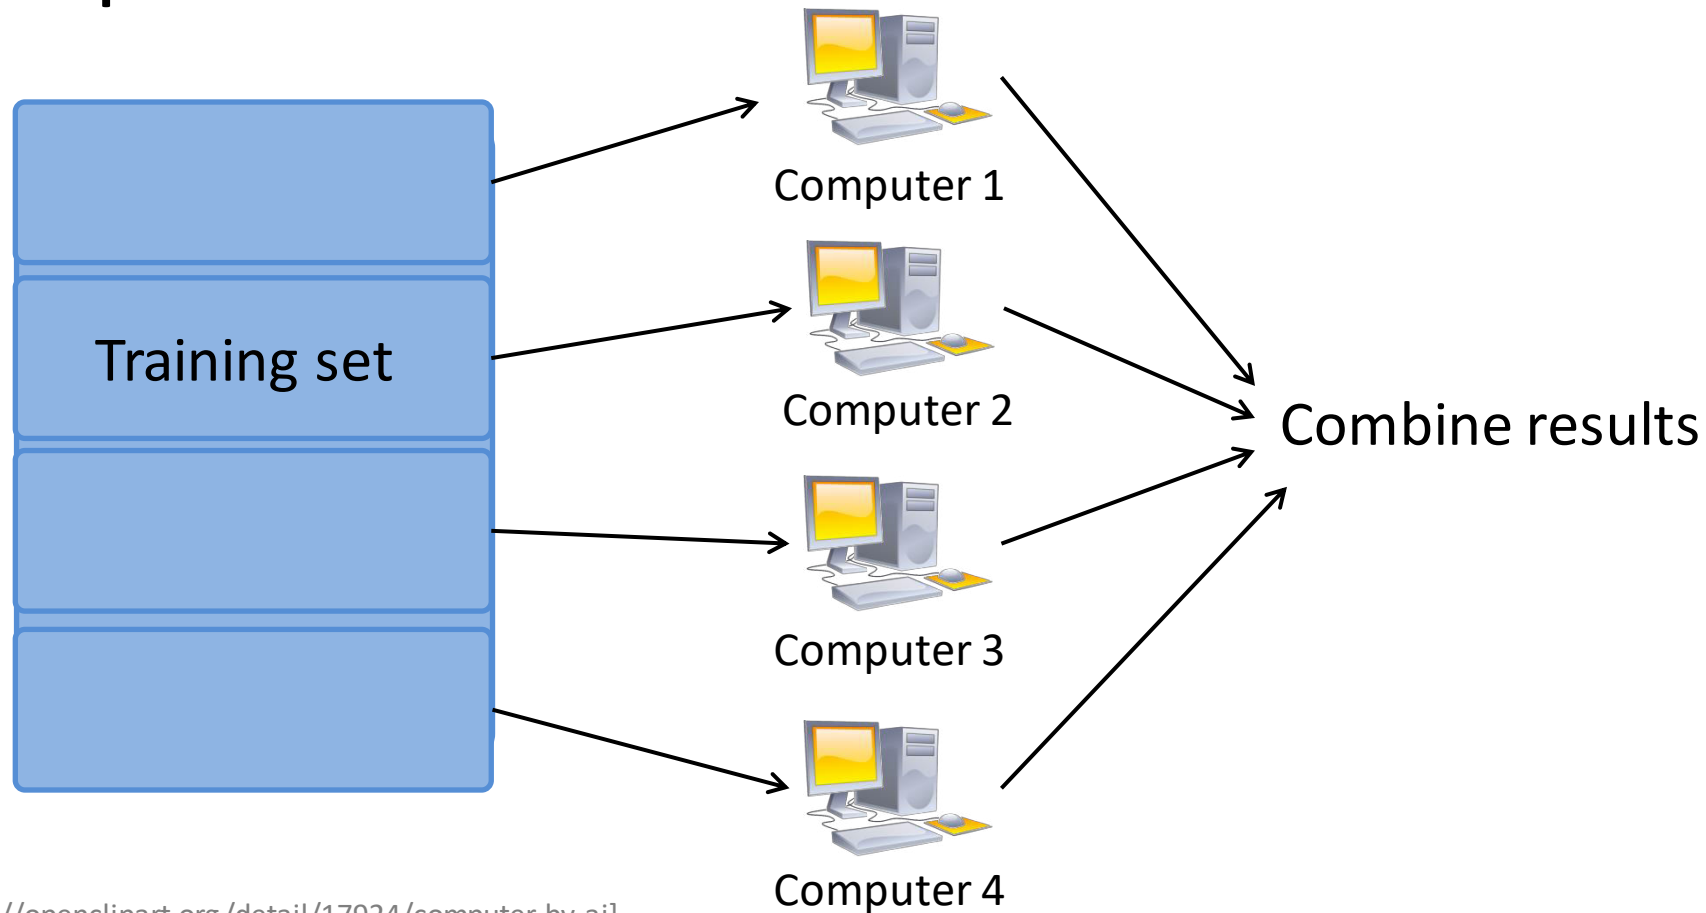

Map-reduce and summation over the training set

Many learning algorithms can be expressed as computing sums of functions over the training set.

E.g. for advanced optimization, with logistic regression, need:

$$J_{train}(\theta) = -\frac{1}{m} \sum_{i=1}^m y^{(i)} \log h_{\theta}(x^{(i)}) - (1 - y^{(i)}) \log(1 - h_{\theta}(x^{(i)}))$$

$$\frac{\partial}{\partial \theta_j} J_{train}(\theta) = \frac{1}{m} \sum_{i=1}^m (h_{\theta}(x^{(i)}) - y^{(i)}) \cdot x_j^{(i)}$$

Multi-core machines

