

# **Automatic Speech Recognition for sEMG Silent Speech**

Tada Makepeace

School of Computing  
Final Year Research Project

May 6, 2022

# Abstract

In this dissertation, I present my work on a novel training regime which greatly reduces the amount of training data required for electromyography (EMG) silent speech classification systems. This approach also decreases the end-to-end inference time of the classification by removing a key component required in previous approaches. The proposed approach has a similar word-error rate (WER) to a previous SOTA approach, both being around 68%, but requires far less training data (x115 times less) and inference speed is improved.

EMG augmentation via data synthesis is also explored, however this approach is less successful. Nonetheless, the findings from the research is included in this report to help future researchers avoid fruitless methods in the future.

Experimental results, visualisations, findings and ablation studies are provided for the silent speech classification task, along with intuitions for how the approach was discovered along with ablation studies highlighting what type of is most useful for the approach.

Ultimately this dissertation provides a novel and efficient method for greatly improving the training and runtime efficiency of future EMG silent speech classification systems.

## **Consent to share**

I consent for this project to be archived by the University Library and potentially used as an example project for future students.

# Table of Contents

<b>Abstract</b>	<b>i</b>
<b>Acknowledgements</b>	<b>viii</b>
<b>1 Introduction</b>	<b>1</b>
1.1 Project Background . . . . .	1
1.2 Project Objectives . . . . .	2
<b>2 Literature Review</b>	<b>3</b>
2.1 Key Terms . . . . .	3
2.2 Digital Voicing of Silent Speech . . . . .	4
2.2.1 Relevance . . . . .	4
2.3 Data Augmentation via EMG Synthesis . . . . .	4
2.4 Data Augmentation Background . . . . .	4
2.5 Applicability to EMG Domain . . . . .	5
2.6 Successful EMG Augmentation Approaches . . . . .	6
<b>3 Research Overview</b>	<b>7</b>
3.1 Full List of Research Questions with Hypotheses . . . . .	7
3.1.1 Data Augmentation via EMG Synthesis . . . . .	7
3.1.2 Fine Tuning Speech Recognition on Model Predictions	8
<b>4 Methodology</b>	<b>9</b>
4.1 Software Development Life Cycle (SFLC) . . . . .	9

<b>5</b>	<b>Datasets</b>	<b>10</b>
<b>6</b>	<b>Approaches</b>	<b>11</b>
6.1	Data Preprocessing . . . . .	11
6.1.1	Audio Speech Features . . . . .	11
6.2	Data Augmentation via EMG Synthesis . . . . .	12
6.2.1	Related Work . . . . .	12
6.2.2	Research Design . . . . .	12
6.2.3	Summary . . . . .	12
6.3	Fine Tuning Speech Recognition on Model Predictions . . . . .	13
6.3.1	Related Work . . . . .	13
6.3.2	Relation to EMG Silent Speech Classification . . . . .	14
6.3.3	Proposed Method . . . . .	14
6.3.4	Research Question . . . . .	15
6.3.5	Hypothesis . . . . .	15
6.3.6	Closed Vocabulary Dataset . . . . .	15
6.3.7	Open Vocabulary (Parallel-Only) Dataset . . . . .	16
6.3.8	Open Vocabulary Full (Parallel and Non-Parallel) Dataset . . . . .	17
6.3.9	Implementation Errors . . . . .	18
6.3.10	Summary . . . . .	19
<b>7</b>	<b>Conclusion</b>	<b>21</b>
<b>8</b>	<b>Future Work</b>	<b>23</b>
8.1	Implementation Errors . . . . .	23
8.1.1	Data Augmentation via EMG Synthesis . . . . .	23
8.1.2	Fine Tuning Speech Recognition on Model Predictions . . . . .	23
<b>A</b>	<b>Project Initiation Document</b>	<b>25</b>
<b>B</b>	<b>Ethics Review</b>	<b>36</b>
<b>C</b>	<b>DeepSpeech2 ASR Model</b>	<b>38</b>

<b>D</b>	<b>Hyperparameters</b>	<b>41</b>
D.1	DeepSpeech2 Audio Hyperparameters . . . . .	41
D.2	Silent Speech Transduction Hyperparameters . . . . .	42
D.2.1	Improved Voicing Transducer Model used in Fine Tun- ing ASR . . . . .	42
<b>E</b>	<b>Silent Speech - ASR Examples</b>	<b>43</b>
<b>F</b>	<b>Audio Preprocessing</b>	<b>46</b>
<b>G</b>	<b>Experiments</b>	<b>48</b>
	<b>References</b>	<b>49</b>

# List of Tables

6.1	DeepSpeech2 Closed Vocab Finetuned Results . . . . .	15
6.2	DeepSpeech2 Open Vocabulary Parallel Finetuned Results . .	17
6.3	DeepSpeech2 Open Vocabulary Full Dataset Finetuned Results	18
D.1	DeepSpeech2 Audio Model Hyperparameters . . . . .	41
D.2	SOTA Silent Speech Transduction Model . . . . .	42
F.1	DeepSpeech2 and Transducer Mel Spectrogram Hyperparam- eters . . . . .	46

# List of Figures

2.1	Original vs Synthesized Vocal EMG Data from EMG Synthesis Approach . . . . .	6
6.1	Comparison of Ideal Ground Truth and Predicted Mel Spectrograms . . . . .	15
6.2	Comparison of Real Ground Truth and Predicted Mel Spectrograms . . . . .	19
F.1	Ground Truth Audio Trainset Preprocessing Pipeline . . . . .	47



# Acknowledgements

Thanks.

# Chapter 1

## Introduction

### 1.1 Project Background

The problem I will investigate is how to classify electrical signals from a person's facial muscles captured using non-invasive surface electromyography (sEMG) into text without them speaking (i.e. silently articulated speech). I believe this project is worth working on because non-invasive silently articulated speech devices are a human computer interface which offer unique benefits which other methods do not. A non-exhaustive list of examples is provided below:

*Privacy of conversation:* Typical speech recognition systems have users broadcast what they're saying to the environment (e.g. issuing commands to an Amazon Alexa device) and therefore privacy is not maintained. A silent speech device does not require the user to say anything aloud, rather they're only required to slightly move their facial muscles to mouth out what they would like to say.

*Eavesdropping:* Voice interfaces are always listening in on conversations, when not desired, only to be visibly activated later on by a specific trigger-word such as 'Ok Google'. A silent speech device could avoid this entirely

by providing a physical mechanism for the user to start recording what they would like to say instead.

*Attention Requiring:* Existing voice interaction devices have low usability as they require the user to pay full attention to what they're saying and how the device is responding. Also, proximity to the device is required as using any voice system from far away reduces its effectiveness. Silent speech systems would avoid this issue as they would be directly recording what the user is intending to say directly from the electrodes which are attached to the skin of the user.

The above examples will benefit all users of silent speech systems. However, these systems could also uniquely benefit users who have medical issues which make regular speech difficult such as people who suffer from Multiple Sclerosis with Dysphonia. There has already been promising research into using silent speech devices to help individuals with varying levels of speech impairments which can benefit from silent speech systems, and further research into healthy or unhealthy people will benefit all future users of silent speech systems. (Kapur et al., 2020)

## 1.2 Project Objectives

The primary objectives for this project are threefold:

- *Improve SOTA Approach:*
- *EMG Data Acquisition:*
- *Open-Source Release:*

The deliverables for this research project are an open-source sEMG silent speech machine learning system which outperforms the current SOTA approach (text classification or speech synthesis) based on a key evaluation metric of that system.

# Chapter 2

## Literature Review

The purpose of this literature review is to explain the context for the research directions for this project. This section also provides background knowledge specific to the silent speech domain which should help familiarise readers with this particularly niche subject area.

### 2.1 Key Terms

A list of silent speech and speech recognition domain specific key terms are provided to familiarise the reader with certain concepts to help the reader digest this report.

- *Word Error Rate (WER)*: Metric used in speech recognition systems which accounts for differences in length of a recognised word sequence and a reference word sequence. WER is derived from Levenshtein distance which is a string metric for measuring the difference between two sequences. The Levenshtein distance between two words is essentially the minimum number of single-character edits (including insertions, deletions or substitutions) required to change one word into another.

Another term for it is the "edit distance".

$$WER = \frac{S + D + I}{N} = \frac{S + D + I}{S + D + C}$$

Where each term means:

S: Number of substitutions

D: Number of deletions

I: Number of insertions

C: Number of correct words

N: Number of words in the reference ( $N = S + D + C$ ) (Levenshtein, 1966)

## 2.2 Digital Voicing of Silent Speech

There are two primary landmark papers released in the silent speech domain which this project takes large inspiration from. These are "Digital Voicing of Silent Speech" (Gaddy and Klein, 2020) and "An Improved Model for Voicing Silent Speech" (Gaddy and Klein, 2021).

### 2.2.1 Relevance

As the primary goal of my project was to find new methods of improving silent speech systems in general, it was useful to find an open-source silent speech dataset which could either be used for producing audio speech from silent speech or classifying silent speech into text.

## 2.3 Data Augmentation via EMG Synthesis

## 2.4 Data Augmentation Background

Data augmentation refers to techniques which are used to either increase the amount of available training data by adding slightly modified copies of the original data or to synthesize new examples entirely. The purpose of this is to

regularise the training and help reduce overfitting when training a machine learning model (Shorten and Khoshgoftaar, 2019).

Many methods exist to generate augmented data for machine learning. One of them is to apply geometric transformations such as: translations, rotations, cropping, flipping, scaling, etc. (Shorten and Khoshgoftaar, 2019).


This method is commonly applied in the computer vision domain and leads to substantial improvements in performance. For instance, when cropping was applied to an image recognition dataset for the Caltech 101 dataset, it lead to a Top-1 score increase of 13.82% (Taylor and Nitschke, 2017).

## 2.5 Applicability to EMG Domain

However unlike images, EMG data is a collection non-stationary time-series data which has been collected from different electrodes and also contains many other artefacts such as baseline noise, powerline interference and other contamination (De Luca et al., 2010). Moreover, simple geometric transformations are not necessarily appropriate for EMG as they may impact time domain features as EMG signals are 1-dimensional.

Further to this, in computer vision projects, it is easy to determine whether an augmented dataset is similar to the original signal. However for EMG signals, it is difficult to determine if an augmented dataset has still retained key properties of the original dataset. Figure 2.1 provides a sample of an original EMG data recording during vocalised speech and the synthesized EMG data, for an utterance from this project to demonstrate this difficulty. Although both of the data samples appear similar, when they are used in a transduction model to produce speech, they sound noticeably different from each other because of the difference within the smaller time windows.

**Figure 2.1:** Original vs Synthesized Vocal EMG Data from EMG Synthesis Approach

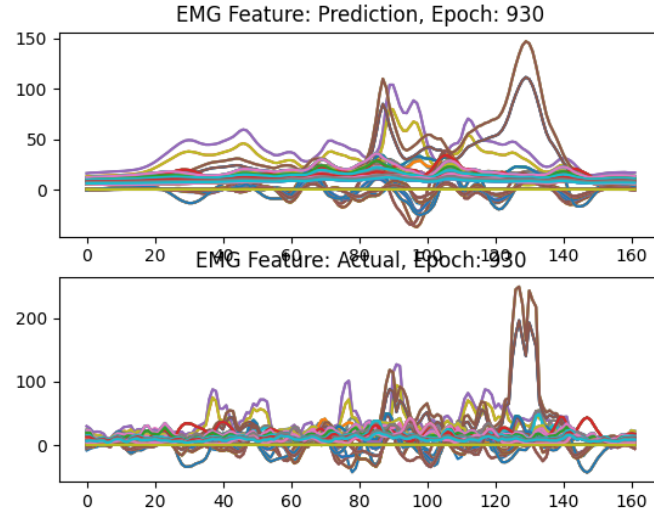

## 2.6 Successful EMG Augmentation Approaches

Despite this, there have been many successful data augmentation techniques for EMG and simliar EEG signals.

# Chapter 3

## Research Overview

This section details the research which was conducted during this project at a high level. The individual approaches further on contain the datasets, experimental conditions, assumptions, related work and evaluation metrics along with justification for each individual approach.

### 3.1 Full List of Research Questions with Hypotheses

#### 3.1.1 Data Augmentation via EMG Synthesis

*Question: How feasible is the synthesis of silent speech EMG signals as a data augmentation technique for training EMG silent speech systems?*

*Hypothesis: Training an EMG synthesis model based on a small EMG dataset will improve the final performance of transduction model*

Measurable: Test loss of the final transduction system when trained with augmented EMG data versus without

Measurable: Visual inspection of the synthesized EMG signals

Measurable: Visual inspection of the predicted mel spectrograms when trained with augmented EMG data versus without



### 3.1.2 Fine Tuning Speech Recognition on Model Predictions

*Question: Can fine tuning an ASR model on a silent speech transduction models mel spectrogram predictions improve performance for text classification?*

*Hypothesis: Fine tuning an ASR model with the predicted mel spectrograms from a pre-trained silent speech transduction model can improve inference time and reduce the required training dataset while maintaining competitive accuracy*

Measurable: WER of final system compared to SOTA for text classification

Measurable: Dataset size required to train the ASR system in hours

Measurable: Estimated end-to-end inference time for the system

# Chapter 4

## Methodology

### 4.1 Software Development Life Cycle (SFLC)

The methodology selected for this project was a mixture of the incremental and iterative software development lifecycles. This is a typical methodology selected for machine learning projects as the exploratory nature of many machine learning projects necessitates a management method which allows for the flexible changing of approaches throughout the course of the project.

At a high level, the project is managed using an incremental approach whereby I found promising ideas from my on-going literature review and personal exploration of the EMG silent speech dataset.

Then when I found an approach which I believed was promising, I conducted initial small-scale experiments to either validate or disprove my initial assumption, and then scaled up my experiments iteratively to verify whether or not my hypothesis was valid.

The evaluation metric for each incremental approach was selected based on the common evaluation metric for that task as reported in the literature.

# Chapter 5

## Datasets

This section is provided to explain the origin of the datasets for this thesis, why they were chosen, the particular slices of the dataset that were used for the different experiments and datasets that were generated for the purpose of this project.

The datasets used for this project are based on the open-source release of data accompanying the Digital Voicing of Silent Speech (**gaddy2020improved**) paper.

# Chapter 6

## Approaches

This chapter will describe the main dataset used for this research, why it was chosen, the main EMG signals of interest from the dataset, methods of feature selection and visualisation and the machine learning approaches used to transcribe the EMG data into a text transcription.

### 6.1 Data Preprocessing

#### 6.1.1 Audio Speech Features

For the purposes of the fine tuning experiments, the ground truth audio files are preprocessed into mel spectrograms rather than MFCCs as in the original two papers (Gaddy and Klein, 2020, Gaddy and Klein, 2021). The reason for this is because mel spectrograms contain more raw data than MFCCs which makes them more appropriate for speech recognition and also the vocoder used for this paper uses mel spectrograms as the input, as do most SOTA vocoders.

## **6.2 Data Augmentation via EMG Synthesis**

One approach for improving the performance of any machine learning model is to synthesize more data. This is particularly useful if the original dataset is small and there are methods to synthesize more data.

### **6.2.1 Related Work**

Previous approaches have used various deep learning techniques to synthesize more EMG data to train EMG deep learning models. One approach (J. J. Bird et al., 2021) uses a GPT-2 (Radford et al., 2018) like model to synthesize EMG signals for simple action recognition such as grasp and release (actions common to robotic prosthetics and manipulators). The inclusion of synthesized EMG data during the training process improved the overall gesture recognition accuracy from 68.29% to 89.5%.

Another related paper from the same author experiments with LSTM and GPT-2 models for synthesizing more speech for a speaker recognition task. The best model found by the authors for this task was a 3-layer, 128 hidden dimension LSTM network (J. Bird et al., 2020).

### **6.2.2 Research Design**

My formal hypothesis for this section is that it is possible to train an EMG augmentation model for voiced EMG data which can improve the performance of a regular transduction model by training on the ground truth voiced EMG data and the synthesized voiced EMG data.

### **6.2.3 Summary**

In summary, my hypothesis was disproved. My initial hypothesis was that it was possible to simply reverse the transduction network, which was introduced in the Digital Voicing paper for transcribing from EMG features into speech features, but instead reverse the features. From my findings I found

that this wasn't true because the low level features of the EMG data are difficult for the LSTM network to correctly reproduce.

In hindsight my approach could have been improved by being more selective in the early stages. I could have determined which electrode contributed the most in the transduction task, and then tried to just synthesise the signals for that particular channel and then tried to synthesise an increasing number of electrode channels.

## 6.3 Fine Tuning Speech Recognition on Model Predictions

This section details an improved approach for training a silent speech recognition system by pre-training a DeepSpeech2 model directly on the predictions of a chosen portion of the dataset.

This is better than performing speech recognition on the final waveform generated in the Digital Voicing (Gaddy and Klein, 2020) paper.

Although the method used in that paper isn't used directly for speech recognition, the end-to-end evaluation procedure can be used for speech recognition by transducing from the silent EMG data into speech features, then using a vocoder to go from speech features into an audio waveform and then using a pretrained ASR model to predict speech from the waveform.

This proposed method skips over the vocoder entirely which improves the end-to-end performance as there is now one less step involved whilst also requiring far less training data, and therefore training time, for the entire silent speech recognition pipeline.

### 6.3.1 Related Work

The intuition behind fine tuning a speech recognition model on the predicted mel spectrograms from the transduction model comes from the literature for

speech recognition. Typical speech recognition models suffer from a loss of accuracy when they are only trained on clean audio data and then evaluated on a noisy dataset (Amodei et al., 2015). For example, in the DeepSpeech2 paper the authors trained their speech recognition model on different fractions of a dataset.


Their results showed that the performance of a model trained on a clean dataset, when evaluated on a dataset of clean audio compared to noisy audio, showed a larger gap when trained on less data. When the authors trained their model on 1% of the entire dataset (120 hours), the WER for the clean dataset was 29.23% whereas for the noisy dataset it was 50.97%. However when they trained on the full dataset (12,000 hours), the clean audio WER was 8.46% compared to 13.59% for the noisy dataset.

The results from their paper show a strong relationship between dataset size and affect on evaluation performance on a noisy dataset. For this reason, this paper researches the affect of providing predicted speech from the SOTA silent speech transduction model to a speech recognition model to close the gap between the WER when evaluated on the ground truth audio features and the predicted audio features (Amodei et al., 2015).

### **6.3.2 Relation to EMG Silent Speech Classification**

### **6.3.3 Proposed Method**

My proposed method involves pre-training the state-of-the-art EMG silent speech transduction model from the second Digital Voicing paper (Gaddy and Klein, 2021), and then saving the predicted mel spectrogram speech features from the model as a custom dataset (refer to Figure 6.1 for an example). Then this dataset will be used along with the ground truth audio files to train a regular speech recognition model. Based on my literature review and intuition from exploring the audio outputs viewing the mel spectrogram visualisations from the model, I was confident this approach would

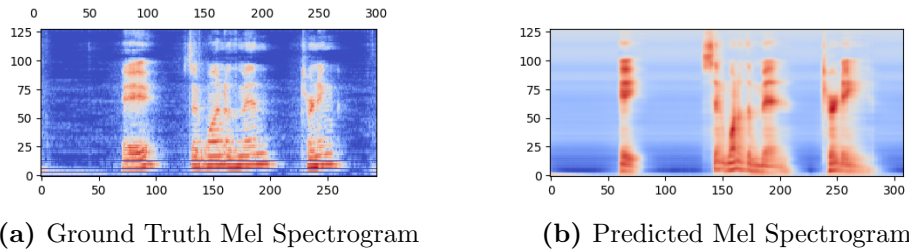

**Figure 6.1:** Comparison of Ideal Ground Truth and Predicted Mel Spectrograms

From both of these mel spectrograms, we can see the low level features of the predicted mel spectrogram appear blurrier (the horizontal red lines with blurry edges). Not pictured in the figures, is the text transcription for the utterances which is: "Eh?" said one of the men, turning.'

be successful.

#### 6.3.4 Research Question

#### 6.3.5 Hypothesis

My hypothesis based on my literature review,

#### 6.3.6 Closed Vocabulary Dataset

The closed vocabulary dataset is the first dataset used to determine how much better a speech recognition model can be improved by training on the predicted mel spectrograms from an already trained transduction model.

The WER of the closed vocabulary ASR model trained only on the training dataset of the closed vocab dataset is 37%. This means that we would not expect the WER of the model, when it's evaluated on transduced examples, to perform better than the ground truth word-error rate.

**Table 6.1:** DeepSpeech2 Closed Vocab Finetuned Results



<b>Dataset</b>	<b>CER</b>	<b>WER</b>
Ground Truth (GT)	87.10	100.50
Voiced	51.27	87.33
Silent	38.80	78.10
Silent, Voiced	<b>35.26</b>	75.33
Silent, Voiced, GT	35.72	<b>70.83</b>

The above results do not use phonemeic prediction and only use greedy decoding in the decoder. DeepSpeech2 is also not the SOTA model for speech recognition which also reduces the performance. This means that the best WER of 70.83% could be improved upon a lot more.

For the combined silent, voiced and GT condition, the model is pre-trained on the ground truth model and and then fine-tuned on the predictions of the silent and voiced utterances.

Here we can see that training on predictions from both modalities from scratch is better than training on a single modality only. However the model is only evaluated on silent EMG text classifications which means that for this experiment, training on silent and voiced predicted speech improves the performance when evaluating on only the silent EMG predictions.

This may be because both of the individual datasets are small (only 400 utterances) so doubling the dataset to 800 utterances gives the model far more examples to learn from, even though the voiced examples diverge from the silent examples.

### 6.3.7 Open Vocabulary (Parallel-Only) Dataset

The next dataset used is the parallel voiced and silent EMG data. This is used because it's smaller than using the entire open vocabulary condition dataset in one go which makes training the individual ASR models and the transduction model faster.

The WER of the ASR model trained only on the training dataset of the open

vocabulary parallel voiced audio is 64.47%.

**Table 6.2:** DeepSpeech2 Open Vocabulary Parallel Finetuned Results

<b>Dataset</b>	<b>CER</b>	<b>WER</b>
Ground Truth (GT)	66.70	110.49
Voiced	156.29	100.00
Silent	44.21	84.19
Silent, Voiced	42.11	85.30
Voiced, GT	43.06	84.65
Silent, GT	41.24	83.97
Silent, Voiced, GT	<b>41.02</b>	<b>81.69</b>

Due to the results of the closed vocabulary training condition and time constraints, training on the voiced portion of the open vocabulary parallel mel spectrogram predictions wasn't conducted.

There is one interesting difference in this training run compared to the closed vocabulary dataset. Training on the silent EMG and voiced EMG conditions together reduces performance. This may be because training on both together was better on training on just the silent EMG signals for the closed vocabulary dataset because the silent EMG dataset only contained 400 data samples so doubling the dataset to 800 data samples, even though the vocalised samples are sub-optimal, is better. However, here the silent EMG dataset is comprised of 2,778 data samples which means that the difference between the silent EMG and voiced EMG predicted mel spectrograms is reducing the performance of the ASR model more than having a larger overall dataset is beneficial.

### 6.3.8 Open Vocabulary Full (Parallel and Non-Parallel) Dataset

This dataset is the full entire dataset, not including the closed vocabulary dataset. The experiments for this dataset include the same experiments for the previous two datasets. However, extra experiments are added for

the additional non-parallel vocal EMG mel spectrogram predictions. The parallel silent and voiced mel spectrogram predictions are included here to show how predicted speech features from a model trained with more data improve the predictions of the same dataset. This has the effect of making the predicted mel spectrograms closer to the ground truth mel spectrograms which means the model is better able to classify the text as the dataset for the entire training regime is closer to the same underlying distribution.

The WER for the ground truth model evaluated on the audio is 45%. This means that we wouldn't expect the model to have a lower WER than this value.


**Table 6.3:** DeepSpeech2 Open Vocabulary Full Dataset Finetuned Results

<b>Dataset</b>	<b>CER</b>	<b>WER</b>
Ground Truth (GT)	61.99	100.74
Parallel Voiced	-	-
Silent	-	-
Silent, Parallel Voiced	-	-
Silent, Parallel Voiced, GT	32.48	<b>68.26</b>
Silent, Parallel Voiced, Non-Parallel Voiced, GT	<b>31.16</b>	68.51

Here we can see that when the transduction model is trained on the full dataset, it produces the best final WER. However there is also another interesting finding, fine tuning the ground truth model on the silent, parallel voiced and non-parallel voiced harms the overall WER but the CER continues to improve. This means that the model is better able to predict individual characters but it's ability to predict words has been slightly reduced.

### 6.3.9 Implementation Errors

One interesting implementation error that was found after conducting the experiments was that the ground truth audio files have not had the exact same preprocessing techniques applied as the target mel spectrograms which the transduction model uses as a ground truth target during training, which

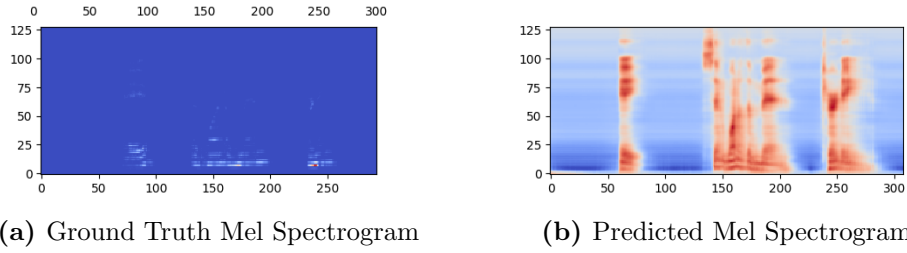

**Figure 6.2:** Comparison of Real Ground Truth and Predicted Mel Spectrograms  
 From both of these mel spectrograms, we can see the the low level features of the predicted mel spectrogram appear blurrier (the curvy red lines). This is because the transduction model a simple linear layer (MLP) between the final transformer layer and the output. This limits the ability of the model to produce more fine tuned results. Not pictured in the figures, is the text transcription for utterances which is: ”Eh?” said one of the men, turning.’.

can be seen in Figure 6.2.

The main difference is that the mel spectrogram values from the transduction model are log-mel spectrogram values. This is a common preprocessing technique in machine learning used to make it easier for a regression model to predict a real valued output. This finding may confound the results for the ground truth results in the above experiments. Interestingly, training the ASR model on the grouth truth represented as raw mel spectrograms mixed with the log-mel spectrograms of the transducer predictions together still results in better performance.

This means that performance of this model may be greatly increased in the future by fixing this bug. Unfortunately this bug was discovered towards the end of the project where it would be too time consuming to explore the effect of fixing this bug.

### 6.3.10 Summary

In summary, this approach proves to be very successful for producing an efficient EMG silent speech recognition system which can match the perfor-

mance of an old transducer model, re-purposed for ASR, while the speech recognition portion of the new proposed system is only trained on around 33 hours of data versus 3,817 (Mozilla, 2020) of data.

# Chapter 7

## Conclusion

Overall this project was highly successful in achieving it's primary objective, which was to find a method of improving either silent speech classification or transduction based on at least one evaluation metric. Instead a method is proposed which achieves the same WER as a prior state-of-the-art (SOTA) system, 68% for the Digital Voicing approach (Gaddy and Klein, 2020) and 68.26% for the proposed approach from this project while requiring 115 times less training data to train the ASR component of the system and removing the vocoder component which would be required for the previous approach.

Secondly, the objective to open-source the method and dataset used for this approach was also successful with the successful speech recognition approach <sup>1</sup> and less successful EMG synthesis approach <sup>2</sup> both being open-sourced before the submission of this project.

However the additional objective to create an open-source sEMG silent speech dataset and release it to the public was unfortunately not achieved. This is unfortunate as there are very few available silent speech datasets available

---

<sup>1</sup><https://github.com/MiscellaneousStuff/semg-asr>

<sup>2</sup>[https://github.com/MiscellaneousStuff/semg\\_silent\\_speech\\_py](https://github.com/MiscellaneousStuff/semg_silent_speech_py)

and the creation and release of such a dataset would of been highly beneficial for researchers.

In conclusion, this project ultimately provides a method which reduces the required data and machine learning system components for silent speech recognition

# Chapter 8

## Future Work

### 8.1 Implementation Errors

#### 8.1.1 Data Augmentation via EMG Synthesis

One major flaw with the model used for synthesizing EMG signals was that the input mel spectrograms for the synthesis model were then directly fed into the LSTM network. However all modern machine learning approaches which process speech features such as mel spectrograms either process the mel spectrograms into hand-crafted features or use a convolutional neural network to learn features in an end-to-end model. Although it's unclear how this may have affected the proposed approach in this project, this is a fundamental flaw with the approach that would need to be corrected in any future approaches.

#### 8.1.2 Fine Tuning Speech Recognition on Model Predictions

The experiments conducted for the fine tuning ASR approach contained a major flaw where the ground truth ASR model was trained using the ground truth audio data, which was transformed into raw mel spectrograms. How-



ever, the ASR models in the experiment were then refined using predicted log-mel spectrograms from the transduction model.

A visual demonstration of the difference between these representations was presented in Figure 6.2. Future work on this method should explore whether using log-mel spectrograms for the ground truth and predicted mel spectrograms improves performance.

# Appendix A

## Project Initiation Document



# **School of Computing Project Initiation Document**

**Tada Makepeace**

**sEMG Silent Speech Research  
Research Project**

## 1. Basic details

Student name:	Tada Makepeace
Draft project title:	sEMG Silent Speech Research
Course:	BSc Computer Science
Project supervisor:	Dr Dalin Zhou
Client organisation:	N/A
Client contact name:	N/A

## 2. Degree suitability

This project satisfies the criteria for my course as it involves using computer science to solve a novel problem. This project relies on using a custom electronic device, i.e. a surface electromyography (sEMG) device to record electrical signals from a person's facial muscles to be able to convert their speech articulations to either digitally voiced speech (reproducing their voice) or text, without the user having to produce sound or strongly move their facial muscles. This project provides a novel way for humans and computers to interact with one another, in other words, it proposes a novel brain-computer interface (BCI).

This project uses a computer based information processing architecture to process the signals acquired from the BCI device by preprocessing multiple channels of sEMG signals which are recorded from the device and converting the data into a format which is suitable for processing. This is performed by removing the noise from the signal and converting the new data into features which can be used in a machine learning transduction (sEMG to digitally voiced speech) or classification architecture (sEMG to text). Then the features extracted from the processed multi-channel sEMG signal can be used to either reproduce the user's voice as they are speaking, or to just classify the signal into text.

The entire project from end to end uses computer science methods to acquire surface electromyography (sEMG) signals from a user's facial muscles, preprocess the data into a suitable representation as features for a machine learning system and then either feed these features into a transduction model or classification model.

### 3. Outline of the project environment and problem to be solved

The problem I will investigate is how to classify electrical signals from a person's facial muscles captured using non-invasive surface electromyography (sEMG) into text without them speaking (i.e. silently articulated speech). I believe this project is worth working on because non-invasive silent speech devices are a brain-computer interface which offers unique benefits which other methods do not. A non-exhaustive list of examples is provided below:

*Privacy of conversation:* Typical speech recognition systems have users broadcast what they're saying to the environment (e.g. issuing commands to an Amazon Alexa device) and therefore privacy is not maintained. A silent speech device does not require the user to say anything aloud, rather they're only required to slightly move their facial muscles to mouth out what they would like to say.

*Eavesdropping:* Voice interfaces are always listening in on conversations, when not desired, only to be visibly activated later on by a specific trigger-word such as "Ok Google". A silent speech device could avoid this entirely by providing a physical mechanism for the user to start recording what they would like to say instead.

*Attention requiring:* Existing voice interaction devices have low usability as they require the user to pay full attention to what they're saying and how the device is responding. Also, proximity to the device is required as using any voice system from far away reduces its effectiveness. Silent speech systems would avoid this issue as they would be directly recording what the user is intending to say directly from the electrodes which are attached to the surface of the skin of the user.

The advantages above will benefit all users of sEMG silent speech systems. However, these systems could also uniquely benefit users who have medical issues which make regular speech difficult such as people who suffer from Multiple Sclerosis with Dysphonia. There has already been [promising research](#) into using silent speech devices to help individuals with varying levels of speech impairments which can benefit from silent speech systems, and further research into healthy or unhealthy people will benefit all future users of silent speech systems.

## 4. Project aim and objectives

The overall aim of this project is to contribute to open-source research concerning sEMG based silent speech systems. This means creating an improved model for sEMG silent speech and acquiring an EMG dataset from participants, including myself, and then open-sourcing the acquired data from each participant who consents to having their data shared in public.

The first and most important objective which will lead to achieving this objective is a combination of using the literature review and open-source code with their datasets to achieve a machine learning model which outperforms the state-of-the-art according to at least a single metric. My initial literature review before starting this project has highlighted the following metrics as being of interest: inference time (milliseconds between the model receiving an input and producing an output) and WER (word-error-rate, a raw measure of the accuracy of the model).

So my initial objectives will be replicating the results of existing sEMG silent speech approaches which are open-source, then creating a model which can either produce a better WER, or to create a model with a similar WER and decrease the inference time of the model. The inference time of the model is important as it can become very uncomfortable for a user using a silent speech system if the system takes more than a few hundred milliseconds to respond. The metrics which I'm optimising along may change depending on how the pilot studies and initial research progress or the direction of research may change entirely.

The second objective is to acquire an OpenBCI device and use it to first acquire EMG data from myself as I will be able to acquire the most data from myself, and then additionally, to acquire EMG data from other participants. The purpose of acquiring data from other participants is to increase the robustness of the model against different people speaking, and this may lead to discoveries for generalising sEMG silent speech technology across different users.

My last objective will be to release my final model and EMG dataset (from consenting participants) as open-source. This means releasing the code and weights of my final model on GitHub, and the EMG dataset using a reliable storage provider who will provide access to the dataset long-term. The specifics regarding the open-sourcing of the model need to be determined as the project progresses, as if the participant refuses to consent to sharing their data, the weights within the trained model would still implicitly contain their data. Related to this objective, I aim to make the model and dataset releases as reproducible as possible by including the code, model, data (consenting participants data, parameters (along with hyperparameters) and environment setup (i.e. using containerisation, etc.) available.

## 5. Project deliverables

Information system artefacts: Open-source sEMG Silent Speech Machine Learning System  
Datasets: Open-source sEMG Silent Speech Dataset (My own sEMG dataset and participants who consent to share their data publically), closed-source sEMG Silent Speech Dataset (Participants who do not consent to share their data publically)  
Documentation: Project report

For this research project, the information system artefact will be the machine learning system itself trained with user data and used in conjunction with an OpenBCI device attached to the skin of a user. And the documents which will be produced are the project report which describes the research undertaken, relating to the information system artefact and acquiring data from participants.

## 6. Project constraints

The key constraint for this project is that it is dependent on using an sEMG device to record EMG data from participants. This requires participants to be physically attached to the device (non-invasively) to make the recordings which means that data can only be gathered from one participant at a time. Also, the data collection process from each participant is time consuming as it may require hours of data from each participant (not including setup, briefing and other mandatory stages). This will limit how many participants can be used within the research because it will take a lot of each individual's time. I will mitigate this by strongly focusing on collecting data from myself in the early stages. This will guarantee I have enough data to train my system and will reduce the amount of data required from other participants.

## 7. Project approach

The background research I will do for this project will involve how to acquire and set up a surface EMG device as I have no prior experience with EMG / EEG acquisition. However, once I have completed this step, my previous experience in digital signal processing (working with audio datasets with ASR), will help along with looking at the [Digital Voicing of Silent Speech](#) code repository to figure out the rest.

I will establish the research direction of this project by finding prior research during my literature review and identifying directions for future research, as well as trying to replicate previous findings for open-source projects which have code and data available. From these open-source projects and the literature, I attempt to implement new methods after reproducing old ones, either by reimplementing methods from one domain into sEMG silent speech, or by innovating entirely new methods. I will also be performing ablation studies (removing components of a system to determine their contribution) during my project to justify the contribution of individual components and the summary of this will be included in the writeup with full details included in the appendix.

After this, I will use my findings from the previous stage in combination with the data I will acquire from participants to create a new model which improves on the metrics found within my literature review. Which metrics I choose will be guided mainly by the initial model prototyping stage as well as the data acquisition stage. The data acquisition stage will be guided by the literature review and initial attempts at improving on different metrics (word-error rate, inference time in ms, etc).

The methodology I will be using in this project will be a combination of the iterative and incremental approaches as that is the current recommended methodology for MLOps (machine learning operations) projects. Although this project is more of an academic research project than an industry service focused one, I still need to create a working demo of my final model (ideally with the OpenBCI device).

This means that I will need a stable working model as I am going along and as I complete the data acquisition stage and parts of my training infrastructure are finalised (e.g. feature selection, training pipeline, data quality checking, etc.), I will be creating automated systems to allow me to just adjust my model or other parts of the system and then start new training runs. The key idea behind the management of this project's artefacts is CACE (changing anything changes everything). This means that tracking code, datasets and models (along with model parameters) is imperative along with combinations of those three is imperative.

## **8. Literature review plan**

The main starting point for my research is the [Digital Voicing of Silent Speech](#) paper by David Gaddy and Dan Klein and their further paper [An Improved Model for Voicing Silent Speech](#) which improves upon their initial paper. This paper provides the greatest depth of explanation out of any paper along with an accompanying dataset and working code. I will also refer to meta-review papers which sample the entire landscape for sEMG Silent Speech, and silent speech research in general (including fMRI research as taking signals directly from the scalp may also be beneficial).

I will also refer to other seminal works in this field such as the [MIT AlterEgo](#) paper released by Arnav Kapur and colleagues as Kapur also released a 60 page thesis which goes into great detail about the biological, biosensing and machine learning aspects of the problem. The paper released by Kapur and colleagues also describes a Convolutional Neural Network (CNN) based model, which is typically used in complex Digital Signal Processing (DSP) problems such as automated speech recognition (ASR) as CNN based models are highly suitable for DSP due to the convolution theorem.

From these papers, I will research papers which are related in the fields of ASR (due to the high overlap between EMG to speech transduction), encoding data into latent space (due to several recent sEMG related papers finding success with this and particularly performant



general models which encode information into latent space and can be used to perform multiple tasks by querying this latent space representation of data).

After reviewing these papers and related fields and methods, I will collate the most relevant methods and any other relevant findings, and I will trial different methods on the open-source dataset released in the [Digital Voicing of Silent Speech](#) paper to find what is successful. From this, I will use this information to inform the construction of my own machine learning model which I will use firstly on the [Digital Voicing of Silent Speech](#) dataset, then on my own acquired data.

## 9. Facilities and resources

The main hardware I need for this project is an OpenBCI device which is a relatively cheap, open-source device which is used to record EEG signals and can also be used for recording EMG signals. Depending on which device is used for research, the cost of the device along with electrodes, will be around £500, give or take £150. However, I will need to get this device shipped from either China or the USA, which means I need to account for shipping time as well during this project. The estimated shipping times are around 1 month so this device will need to be ordered as soon as possible in case the shipping is delayed, or the device and it's related components have an issue.

The second most important hardware I need is a modern GPU as I will be training machine learning models using 10s of GBs worth of data. Fortunately I have an RTX 3060 Ti at home which is suitable for at least prototyping machine learning models and I have also built my own library for utilising preemptible (interruptible) cloud processing devices, which means I can use cloud computing for 20% of the price. However, my local GPU should suffice for this project.

## 10. Log of risks

Description	Impact	Likelihood	Mitigation	First indicator
<i>COVID-19 infection risk between research team and participants</i>	<i>Severe</i>	<i>Likely</i>	<i>Ask participants if they have any symptoms of COVID-19: high temperature, cough, loss of taste</i>	<i>Either the research team starts displaying COVID-19 systems or a participant does after gathering data</i>
<i>EMG dataset data loss</i>	<i>Severe</i>	<i>Unlikely</i>	<i>I will set up automatic encrypted</i>	<i>I am unable to access a part of</i>

			<i>at rest backups for all of the data I gather both locally and on external storage providers</i>	<i>my gathered data or there is a change in size of the original dataset</i>
<i>OpenBCI hardware is damaged during testing (electrodes, main device, etc.)</i>	<i>Severe</i>	<i>Unlikely</i>	<i>I will personally store the OpenBCI device in my home and only take it out when acquiring data. I will also acquire more electrodes than necessary for backup.</i>	<i>Device is either unusable or shows other signs of reporting faulty data or working improperly.</i>
<i>Ten20 Conductive Paste electrode paste allergy</i>	<i>Severe</i>	<i>Depends on the participant</i>	<i>I will not accept any participants who carry a risk of an allergic reaction to the electrode paste. This includes anyone with a history of skin allergies or a history of sensitivity to cosmetics or lotions.</i>	<u><i>Any persistent redness, soreness, burning, itching, or swelling on the skin.</i></u>

My plan for reviewing risks will be identifying what risks have already occurred and what new risks may occur based on changes between different revisions of the risk assessment checklist (e.g. if I am unable to acquire a certain electrode paste and have to get a different brand, checking with the manufacturers guidance on skin irritation, etc.)

## 11. Project plan

Task Name	Duration	October 2021	November 2021	December 2021	January 2022	February 2022	March 2022	April 2022	May 2022
<b>Google Calendar Tracking</b>	<b>15 wks - 6 mths</b>								
Weekly Writeup (Week Conclusions)	15 wks - 6 mths								
Project Analysis (Project Statistics)	4 wks - 7 wks								
<b>Report Documentation</b>	<b>15 wks - 6 mths</b>								
Weekly Writeup	15 wks - 6 mths								
Writeup Google Calendar Insights	4 wks - 7 wks								
Report Finalisation	3 wks								
<b>Ethical Approval</b>	<b>2 wks - 3 wks</b>								
Submit to Supervisor	1 wk								
Participant/Project Ethics Documents	1 wk								
FEC Discussion (Open-Sourcing)	1 wk								
EMG Data Acquisition Decision (Yes, No)	2 wks - 3 wks								
<b>sEMG Data Gathering</b>	<b>12 wks - 19 wks</b>								
<b>Acquire OpenBCI Device</b>	<b>4 wks - 6 wks</b>								
Shipping Time	4 wks - 6 wks								
Check Device Works	1 wk								
<b>Personal Data Gathering</b>	<b>3 wks - 6 wks</b>								
Pilot Data Gathering	1 wks - 2 wks								
Main Data Gathering	2 wks - 4 wks								
<b>Participant Data Gathering</b>	<b>3 wks - 5 wks</b>								
Pilot Data Gathering	1 wks - 2 wks								
Main Data Gathering	2 wks - 3 wks								
<b>Final Data Compilation and Analysis</b>	<b>2 wks - 4 wks</b>								
<b>Literature Review</b>	<b>15 wks - 6 mths</b>								
Initial Literature Review Notes	1 wks								
Initial Literature Review Draft	1 wk								
Novel Approaches Literature Review Notes	2 wks								
Test Novel Approaches from Literature	4 wks								
Novel Approaches Literature Review Draft	1 wk								
Ongoing Literature Review	6 wks - 15 wks								
<b>sEMG Model R&amp;D (incl. training time)</b>	<b>10 wks - 17 wks</b>								
<b>Digital Voicing &amp; Other Datasets</b>	<b>6 wks - 9 wks</b>								
Data Analysis	1 wk - 2 wks								
Reproduce Results	1 wk - 2 wks								
Test Novel Approaches from Literature	4 wks - 5 wks								
<b>Personal Data (Analysis, Model Training)</b>	<b>3 wks - 6 wks</b>								
<b>Participant Data (Analysis, Model Training)</b>	<b>3 wks - 5 wks</b>								
<b>Project Demo Showcases (Progress, Final)</b>	<b>2 wks</b>								

## **12. Legal, ethical, professional, social issues (mandatory)**

The main security implication of this project is the generation of EMG and possibly audio data unique to each participant. Secure storage and processing of this data is the main security concern and will be achieved by only processing the data on my local device or a trusted cloud computing provider. The data itself will only be named with a unique number instead of any personally identifiable information so if the data is lost, it is not easily identifiable. This will ensure that only I know whose data the unique numbers correspond with. This security obligation is also consistent with the data protection legal requirement.

However, as I intend to open-source as much of this project, including the code and dataset, I will be releasing the data from participants who consent to having their data released publically. This will be added as an additional option in the <> document provided to participants. Participants are fully within their rights to not consent to having their data shared and it will not be included in the open-source model or dataset release. At a minimum I will be releasing the dataset and model which I record of myself, which will likely comprise a large portion of the collected data.

# Appendix B

## Ethics Review

# Certificate of Ethics Review

**Project title:** sEMG Silent Speech - Automatic Speech Recognition (ASR)

<b>Name:</b>	Tada Makepeace	<b>User ID:</b>	904749	<b>Application date:</b>	05/05/2022 12:45:02	<b>ER Number:</b>	TETHIC-2022-103171
--------------	----------------	-----------------	--------	--------------------------	------------------------	-------------------	--------------------

You must download your referral certificate, print a copy and keep it as a record of this review.

The FEC representative(s) for the **School of Computing** is/are [Haythem Nakkas](#), [David Williams](#)

It is your responsibility to follow the University Code of Practice on Ethical Standards and any Department/School or professional guidelines in the conduct of your study including relevant guidelines regarding health and safety of researchers including the following:

- [University Policy](#)
- [Safety on Geological Fieldwork](#)

It is also your responsibility to follow University guidance on Data Protection Policy:

- [General guidance for all data protection issues](#)
- [University Data Protection Policy](#)

Which school/department do you belong to?: **School of Computing**

What is your primary role at the University?: **Undergraduate Student**

What is the name of the member of staff who is responsible for supervising your project?: **Dr Dalin Zhou**

Is the study likely to involve human subjects (observation) or participants?: No

Will financial inducements (other than reasonable expenses and compensation for time) be offered to participants?: No

Are there risks of significant damage to physical and/or ecological environmental features?: No

Are there risks of significant damage to features of historical or cultural heritage (e.g. impacts of study techniques, taking of samples)?: No

Does the project involve animals in any way?: No

Could the research outputs potentially be harmful to third parties?: No

Could your research/artefact be adapted and be misused?: No

Will your project or project deliverables be relevant to defence, the military, police or other security organisations and/or in addition, could it be used by others to threaten UK security?: No

**I confirm that I have considered the implications for data collection and use, taking into consideration legal requirements (UK GDPR, Data Protection Act 2018 etc)**

**I confirm that I have considered the impact of this work and and taken any reasonable action to mitigate potential misuse of the project outputs**

**I confirm that I will act ethically and honestly throughout this project**

## Supervisor Review

As supervisor, I will ensure that this work will be conducted in an ethical manner in line with the University Ethics Policy.

Supervisor's signature:

Date:

# Appendix C

## DeepSpeech2 ASR Model

```
SpeechRecognitionModel(  
  (cnn): Conv2d(1, 32, kernel_size=(3, 3), stride=(2, 2), padding=(1, 1))  
  (rescnn_layers): Sequential(  
    (0): ResidualCNN(  
      (cnn1): Conv2d(32, 32, kernel_size=(3, 3), stride=(1, 1), padding=(1, 1))  
      (cnn2): Conv2d(32, 32, kernel_size=(3, 3), stride=(1, 1), padding=(1, 1))  
      (dropout1): Dropout(p=0.1, inplace=False)  
      (dropout2): Dropout(p=0.1, inplace=False)  
      (layer_norm1): CNNLayerNorm(  
        (layer_norm): LayerNorm((64,), eps=1e-05, elementwise_affine=True)  
      )  
      (layer_norm2): CNNLayerNorm(  
        (layer_norm): LayerNorm((64,), eps=1e-05, elementwise_affine=True)  
      )  
    )  
    (1): ResidualCNN(  
      (cnn1): Conv2d(32, 32, kernel_size=(3, 3), stride=(1, 1), padding=(1, 1))  
      (cnn2): Conv2d(32, 32, kernel_size=(3, 3), stride=(1, 1), padding=(1, 1))  
      (dropout1): Dropout(p=0.1, inplace=False)  
      (dropout2): Dropout(p=0.1, inplace=False)
```

```

(layer_norm1): CNNLayerNorm(
  (layer_norm): LayerNorm((64,), eps=1e-05, elementwise_affine=True)
)
(layer_norm2): CNNLayerNorm(
  (layer_norm): LayerNorm((64,), eps=1e-05, elementwise_affine=True)
)
)
(2): ResidualCNN(
  (cnn1): Conv2d(32, 32, kernel_size=(3, 3), stride=(1, 1), padding=(1, 1))
  (cnn2): Conv2d(32, 32, kernel_size=(3, 3), stride=(1, 1), padding=(1, 1))
  (dropout1): Dropout(p=0.1, inplace=False)
  (dropout2): Dropout(p=0.1, inplace=False)
  (layer_norm1): CNNLayerNorm(
    (layer_norm): LayerNorm((64,), eps=1e-05, elementwise_affine=True)
  )
  (layer_norm2): CNNLayerNorm(
    (layer_norm): LayerNorm((64,), eps=1e-05, elementwise_affine=True)
  )
)
)
(fully_connected): Linear(in_features=2048, out_features=512, bias=True)
(birnn_layers): Sequential(
  (0): BidirectionalGRU(
    (BiGRU): GRU(512, 512, batch_first=True, bidirectional=True)
    (layer_norm): LayerNorm((512,), eps=1e-05, elementwise_affine=True)
    (dropout): Dropout(p=0.1, inplace=False)
  )
  (1): BidirectionalGRU(
    (BiGRU): GRU(1024, 512, bidirectional=True)
    (layer_norm): LayerNorm((1024,), eps=1e-05, elementwise_affine=True)
    (dropout): Dropout(p=0.1, inplace=False)
  )
  (2): BidirectionalGRU(

```



```

        (BiGRU): GRU(1024, 512, bidirectional=True)
        (layer_norm): LayerNorm((1024,)), eps=1e-05, elementwise_affine=True)
        (dropout): Dropout(p=0.1, inplace=False)
    )
    (3): BidirectionalGRU(
        (BiGRU): GRU(1024, 512, bidirectional=True)
        (layer_norm): LayerNorm((1024,)), eps=1e-05, elementwise_affine=True)
        (dropout): Dropout(p=0.1, inplace=False)
    )
    (4): BidirectionalGRU(
        (BiGRU): GRU(1024, 512, bidirectional=True)
        (layer_norm): LayerNorm((1024,)), eps=1e-05, elementwise_affine=True)
        (dropout): Dropout(p=0.1, inplace=False)
    )
)
(classifier): Sequential(
  (0): Linear(in_features=1024, out_features=512, bias=True)
  (1): GELU()
  (2): Dropout(p=0.1, inplace=False)
  (3): Linear(in_features=512, out_features=29, bias=True)
)
)

```

# Appendix D

## Hyperparameters

Throughout the course of this research, many different machine learning models were trained to evaluate their performance on tasks. During these experiments, the hyperparameters of the individual models were tweaked to improve the performance of the models on the individual tasks. This section lists the final hyperparameters of the individual networks.

### D.1 DeepSpeech2 Audio Hyperparameters

**Table D.1:** DeepSpeech2 Audio Model Hyperparameters

Hyperparameter	Description	Value
n_cnn_layers	Number of CNN block layers	3
n_rnn_layers	Number of RNN block layers	5
n_class	Number of model classes	Vocabulary size
n_feats	Number of CNN block features	128
stride	CNN stride value	2
dropout	Dropout value	0.1
learning_rate	Initial learning rate	5e-4
batch_size	Examples per single minibatch	5

## D.2 Silent Speech Transduction Hyperparameters

### D.2.1 Improved Voicing Transducer Model used in Fine Tuning ASR

The hyperparameters for the transduction model were reduced from the original SOTA model due to hardware constraints. In the Additional Reproducibility Information of the second Digital Voicing (Gaddy and Klein, 2021) paper, they state that to train the full model takes roughly 12 hours on an Nvidia Quadro RTX 6000 which has 24GB VRAM. The GPU I was experimenting on only had 8GB VRAM which meant that I had to halve the number of transformer layers and reduce the hidden dimension size. For reference, on an Nvidia RTX 3060 with Automated Mixed Precision enabled on PyTorch, training the transduction model with these settings on the full dataset took 4 hours and 49 minutes.

**Table D.2:** SOTA Silent Speech Transduction Model

Hyperparameter	Description	Value
n_transformer_layers	Number of Transformer Encoder layers	6 to 3
stride	ResNet Block stride value	1
learning_rate	Initial learning rate	1e-3
batch_size	Examples per single minibatch	32
epochs	Number of full dataset training iterations	80
model_size	Size of hidden dimension for transformer encoder	768 to 512

# Appendix E

## Silent Speech - ASR Examples

The top 10 most accurate transcriptions predicted by the silent speech recognition system are provided below. These results can be reproduced by following the evaluation instructions on <sup>1</sup>

1.

Target:

Prediction:

WER: 0.000000 CER: 0.000000

2.

Target: iv

Prediction: iv

WER: 0.000000 CER: 0.000000

3.

Target: where are you going i asked

Prediction: where are you going i ast

WER: 0.166667 CER: 0.063830

4.

---

<sup>1</sup><https://github.com/MiscellaneousStuff/semg-asr>

Target: the place was impassable

Prediction: the place was impassedabel

WER: 0.250000 CER: 0.275862

5.

Target: and so forth

Prediction: and so farth

WER: 0.333333 CER: 0.058824

6.

Target: that was it

Prediction: that was dede

WER: 0.333333 CER: 0.250000

7.

Target: then suddenly the white flashes of the heat-ray came leaping towards me

Prediction: then suddenly the white flashes of the headray came at leaping towaeasman

WER: 0.333333 CER: 0.131579

8.

Target: i saw astonishment giving place to horror on the faces of the people about me

Prediction: i saw u stonishment kaving macsed order on the faces of the people abou me

WER: 0.400000 CER: 0.170732

9.

Target: the shell burst clean in the face of the thing

Prediction: the chill maghs geleane and the face of the thing

WER: 0.400000 CER: 0.235294

10.

Target: he turned stared bawled something about crawling out in a thing like a dish cover and ran on to the gate of the house at the crest

Prediction: he tone stared palled something about crawling out in tae think

lckid dish comber and ran on to the gade of the house at the grest  
WER: 0.407407 CER: 0.143750

# Appendix F

## Audio Preprocessing

This section contains the mel spectrogram options applied to all of the audio files, whether they were transduced or just produced from the ground truth audio files.

**Table F.1:** DeepSpeech2 and Transducer Mel Spectrogram Hyperparameters

Setting	Description	Value
sample_rate	Input audio sampling rate	16000
n_mels	Number of mel-filterbank bins	128 bins
hop_length	Length of non-intersecting portion of window length	160 samples
win_length	Number of samples to consider for each window	432 samples
n_fft	Number of Fast Fourier Transform bins	512 bins

The preprocessing pipeline for the training set of the ground truth audio models included extra data augmentation steps. These techniques are regularly used in ASR models as they have been shown to regularise the training of the networks.

**Figure F.1:** Ground Truth Audio Trainset Preprocessing Pipeline

```
train_audio_transforms = nn.Sequential(  
    torchaudio.transforms.MelSpectrogram(  
        sample_rate=16_000,  
        n_mels=128,  
        hop_length=160,  
        win_length=432,  
        n_fft=512,  
        center=False),  
    torchaudio.transforms.FrequencyMasking(  
        freq_mask_param=15),  
    torchaudio.transforms.TimeMasking(time_mask_param=35)  
)
```



# Appendix G

## Experiments

# References

- Amodei, D., Anubhai, R., Battenberg, E., Case, C., Casper, J., Catanzaro, B., Chen, J., Chrzanowski, M., Coates, A., Diamos, G., Elsen, E., Engel, J., Fan, L., Fougner, C., Han, T., Hannun, A., Jun, B., LeGresley, P., Lin, L., ... Zhu, Z. (2015). Deep speech 2: End-to-end speech recognition in english and mandarin. arXiv. <https://doi.org/10.48550/ARXIV.1512.02595>
- Bird, J., Faria, D., Ekárt, A., Premebida, C., & Ayrosa, P. (2020). *Lstm and gpt-2 synthetic speech transfer learning for speaker recognition to overcome data scarcity*.
- Bird, J. J., Pritchard, M., Fratini, A., Ekárt, A., & Faria, D. R. (2021). Synthetic biological signals machine-generated by gpt-2 improve the classification of eeg and emg through data augmentation. *IEEE Robotics and Automation Letters*, 6(2), 3498–3504. <https://doi.org/10.1109/LRA.2021.3056355>
- De Luca, C. J., Donald Gilmore, L., Kuznetsov, M., & Roy, S. H. (2010). Filtering the surface emg signal: Movement artifact and baseline noise contamination. *Journal of Biomechanics*, 43(8), 1573–1579. <https://doi.org/https://doi.org/10.1016/j.jbiomech.2010.01.027>
- Gaddy, D., & Klein, D. (2020). Digital voicing of silent speech.
- Gaddy, D., & Klein, D. (2021). An improved model for voicing silent speech.
- Kapur, A., Sarawgi, U., Wadkins, E., Wu, M., Hollenstein, N., & Maes, P. (2020). Non-Invasive Silent Speech Recognition in Multiple Sclerosis with Dysphonia (A. V. Dalca, M. B. McDermott, E. Alsentzer, S. G.

- Finlayson, M. Oberst, F. Falck, & B. Beaulieu-Jones, Eds.). In A. V. Dalca, M. B. McDermott, E. Alsentzer, S. G. Finlayson, M. Oberst, F. Falck, & B. Beaulieu-Jones (Eds.), *Proceedings of the machine learning for health neurips workshop*, PMLR. <http://proceedings.mlr.press/v116/kapur20a.html>
- Levenshtein, V. I. (1966). Binary Codes Capable of Correcting Deletions, Insertions and Reversals. *Soviet Physics Doklady*, 10, 707.
- Mozilla. (2020). DeepSpeech 0.7.0 release. GitHub. <https://github.com/mozilla/DeepSpeech/releases/tag/v0.7.0>
- Radford, A., Wu, J., Child, R., Luan, D., Amodei, D., & Sutskever, I. (2018). Language models are unsupervised multitask learners. <https://d4mucfpksywv.cloudfront.net/better-language-models/language-models.pdf>
- Shorten, C., & Khoshgoftaar, T. M. (2019). A survey on image data augmentation for deep learning. *J. Big Data*, 6, 60. <https://doi.org/10.1186/s40537-019-0197-0>
- Taylor, L., & Nitschke, G. (2017). Improving deep learning using generic data augmentation. arXiv. <https://doi.org/10.48550/ARXIV.1708.06020>