
Airline Reservation System(Voltaire)

Package: default



Package: admin

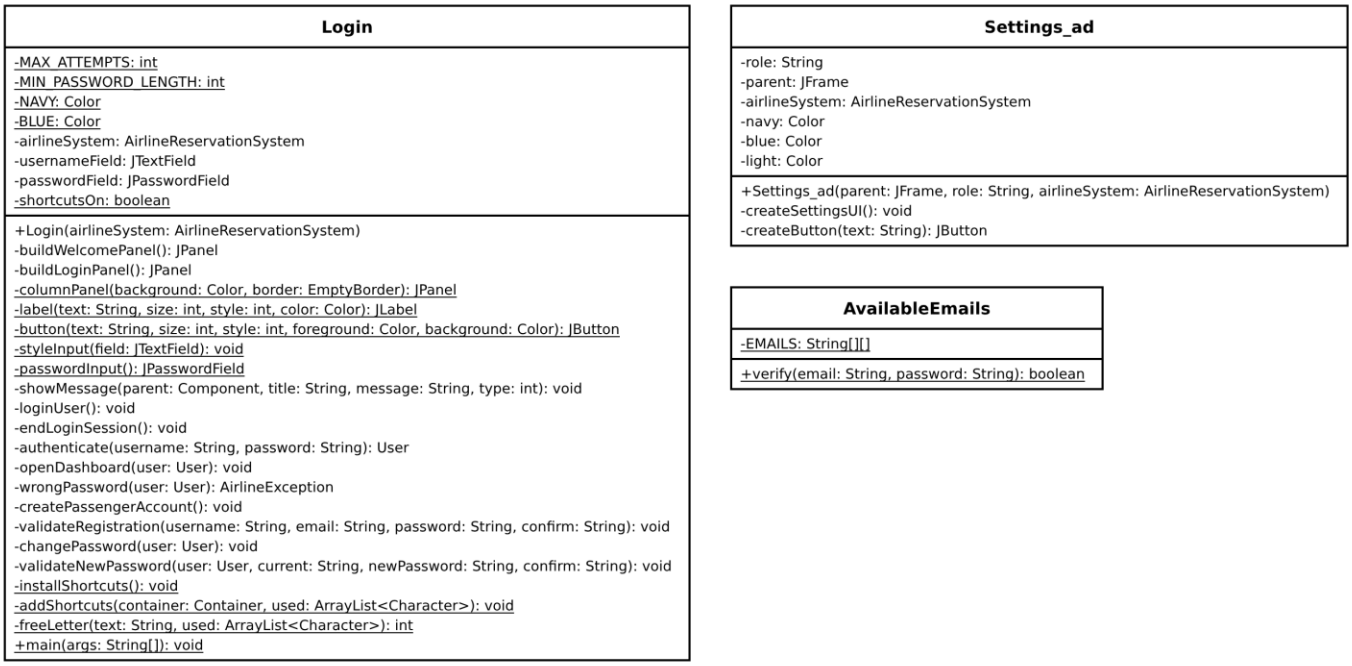

AdminDashboardPanel

-app: AirlineReservationSystem
-userTableModel: DefaultTableModel
-flightTableModel: DefaultTableModel
-locationTableModel: DefaultTableModel
-bookingTableModel: DefaultTableModel
-FONT_LABEL: Font
-FONT_BUTTON: Font
-FONT_TABLE: Font
-FONT_TABLE_HEADER: Font

+AdminDashboardPanel(app: AirlineReservationSystem)
-blueButton(text: String): JButton
-BubSort(model: DefaultTableModel, priceColumnIndex: int, ascending: boolean): void
-restoreDefaultOrder(model: DefaultTableModel): void
-LinearSearch(table: JTable, model: DefaultTableModel, searchColIndex: int, labelName: String, keyword: String): void
-performUniversalEdit(table: JTable, model: DefaultTableModel): void
-performFlightEdit(table: JTable, model: DefaultTableModel): void
-askFlight(current: String[], ignoredRow: int): String[]
-routePart(route: String, index: int): String
-placeBox(places: String[], selected: String): JComboBox<String>
-flightError(values: String[], ignoredRow: int): String
-isPositiveNumber(text: String): boolean
-formatPrice(text: String): String
-flightNoAlreadyExists(flightNo: String, ignoredRow: int): boolean
-styleTable(table: JTable): JScrollPane
-wrapTab(table: JTable, bottomActionPanel: JPanel, model: DefaultTableModel, searchColIndex: int, searchLabel: String, isFlightTab: boolean): JPanel
-wrapTabWithTopRightActions(table: JTable, bottomActionPanel: JPanel, model: DefaultTableModel, searchColIndex: int, searchLabel: String, isFlightTab: boolean, customEdit: ActionListener): JPanel
-verifyAdminPassword(enteredPassword: String): void
-cancelFlightWithBookings(flightNo: String): void
-askAdminPassword(action: String): boolean
-createManageUsersTab(): JPanel
-createManageFlightsTab(): JPanel
-createSeatClassesTab(): JPanel
-seatClassRow(seatClass: SeatClass): Object[]
-editPerks(seatClass: SeatClass): boolean
-createManageLocationsTab(): JPanel
-addLocation(): void
-locationCodeExists(code: String, ignoredRow: int): boolean
-editLocation(table: JTable): void
-createManageBookingsTab(): JPanel
-performBookingEdit(table: JTable): void
-createReportsTab(): JPanel
-createCard(title: String, value: String): JPanel

FlightClasses

-seatClass: SeatClass
-flightNumber: String
-origin: String
-destination: String
-departureDate: String
-returnDate: String
-departureTime: String
-baseFare: double
-refundPolicy: String
-category: String
-availableSeats: int

+FlightClasses(seatClass: SeatClass, flightNumber: String, origin: String, destination: String, departureDate: String, returnDate: String, departureTime: String, availableSeats: int, baseFare: double, refundPolicy: String, category: String)
+getClassName(): String
+calculateFare(): double
+getCheckedBaggage(): String
+getMeal(): String
+getFlightNumber(): String
+getOrigin(): String
+getDestination(): String
+getDepartureDate(): String
+getReturnDate(): String
+getDepartureTime(): String
+getRefundPolicy(): String
+getAvailableSeats(): int
+isDomestic(): boolean
+returnsOn(date: String): boolean

BookingRecord


-referenceId: String
-bookingId: String
-userId: String
-flight: FlightClasses
-seats: ArrayList<String>
-passengerNames: ArrayList<String>
-passengerIds: ArrayList<String>
-paymentMethod: String
-paymentAccount: String
-paymentStatus: String
-amountPaid: double
-bookingStatus: String
-cancellationStatus: String
-refundStatus: String
-requestId: String
-passengerDetails: ArrayList<PassengerDetails>

+BookingRecord(referenceId: String, bookingId: String, userId: String, flight: FlightClasses, seats: ArrayList<String>, passengerNames: ArrayList<String>, passengerIds: ArrayList<String>, paymentMethod: String, paymentAccount: String, paymentStatus: String, amountPaid: double)
+setPassengerDetails(passengers: PassengerDetails[]): void
+getPassengerEmailsText(): String
+getPassportNumsText(): String
+getPassengerIdsText(): String
+setPaymentStatus(paymentStatus: String): void
+getReferenceId(): String
+getBookingId(): String
+getUserId(): String
+getFlight(): FlightClasses
+getSeats(): ArrayList<String>
+getPaymentMethod(): String
+getPaymentAccount(): String
+getPaymentStatus(): String
+getAmountPaid(): double
+getBookingStatus(): String
+setBookingStatus(bookingStatus: String): void
+getCancellationStatus(): String
+setCancellationStatus(cancellationStatus: String): void
+getRefundStatus(): String
+setRefundStatus(refundStatus: String): void
+getRequestId(): String
+setRequestId(requestId: String): void
+getFlightNumber(): String
+getOrigin(): String
+getDestination(): String
+getTicketType(): String
+isPaidOnline(): boolean
+isActive(): boolean
+getPassengerNamesText(): String
+getSeatsText(): String


User


+PASSENGER: String
+STAFF: String
+ADMIN: String
+ROLES: String[]
-userId: String
-username: String
-fullName: String
-email: String
-password: String
-role: String
-status: String
-loginAttempts: int

+User(userId: String, username: String, fullName: String, email: String, password: String, role: String, status: String)
+User(userId: String, fullName: String, email: String, password: String, role: String, status: String)
+usernameOf(email: String): String
+matchesLogin(text: String): boolean
+isRole(roleName: String): boolean
+isBlocked(): boolean
+canBeBlocked(): boolean
+getUserId(): String
+getUsername(): String
+setUsername(username: String): void
+getEmail(): String
+setEmail(email: String): void
+getPassword(): String
+setPassword(password: String): void
+getRoleName(): String
+setRole(role: String): void
+getStatus(): String
+setStatus(status: String): void
+getLoginAttempts(): int
+setLoginAttempts(loginAttempts: int): void

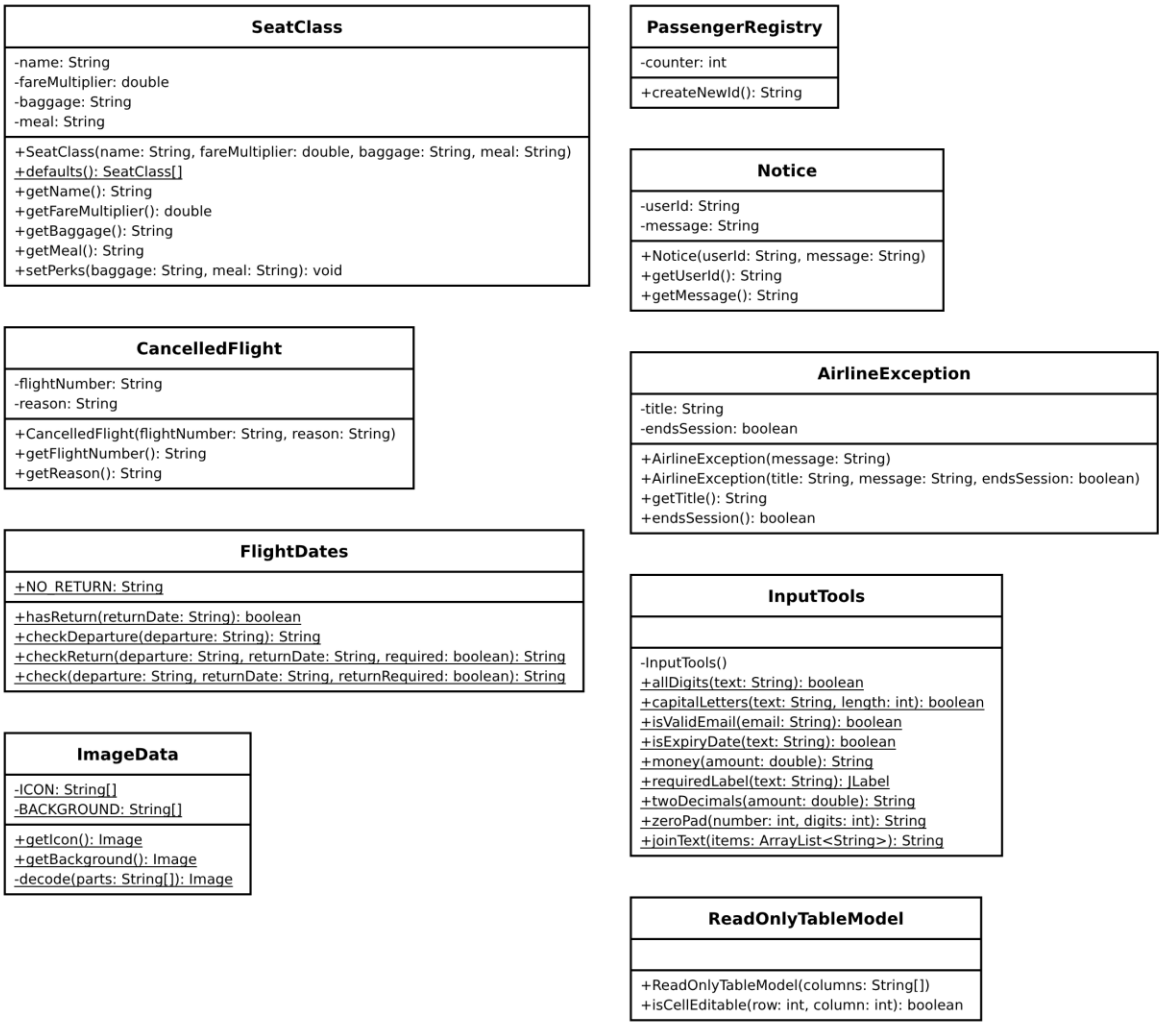
SeatClass
-name: String
-fareMultiplier: double
-baggage: String
-meal: String
+SeatClass(name: String, fareMultiplier: double, baggage: String, meal: String)
+defaults(): SeatClass[]
+getName(): String
+getFareMultiplier(): double
+getBaggage(): String
+getMeal(): String
+setPerks(baggage: String, meal: String): void
PassengerRegistry
-counter: int
+createNewId(): String
Notice
-userId: String
-message: String
+Notice(userId: String, message: String)
+getUserId(): String
+getMessage(): String
CancelledFlight
-flightNumber: String
-reason: String
+CancelledFlight(flightNumber: String, reason: String)
+getFlightNumber(): String
+getReason(): String
AirlineException
-title: String
-endsSession: boolean
+AirlineException(message: String)
+AirlineException(title: String, message: String, endsSession: boolean)
+getTitle(): String
+endsSession(): boolean
FlightDates
+NO_RETURN: String
+hasReturn(returnDate: String): boolean
+checkDeparture(departure: String): String
+checkReturn(departure: String, returnDate: String, required: boolean): String
+check(departure: String, returnDate: String, returnRequired: boolean): String
InputTools
-InputTools()
+allDigits(text: String): boolean
+capitalLetters(text: String, length: int): boolean
+isValidEmail(email: String): boolean
+isExpiryDate(text: String): boolean
+money(amount: double): String
+requiredLabel(text: String): JLabel
+twoDecimals(amount: double): String
+zeroPad(number: int, digits: int): String
+joinText(items: ArrayList<String>): String
ImageData
-ICON: String[]
-BACKGROUND: String[]
+getIcon(): Image
+getBackground(): Image
-decode(parts: String[]): Image
ReadOnlyTableModel
+ReadOnlyTableModel(columns: String[])
+isCellEditable(row: int, column: int): boolean

Package: passenger

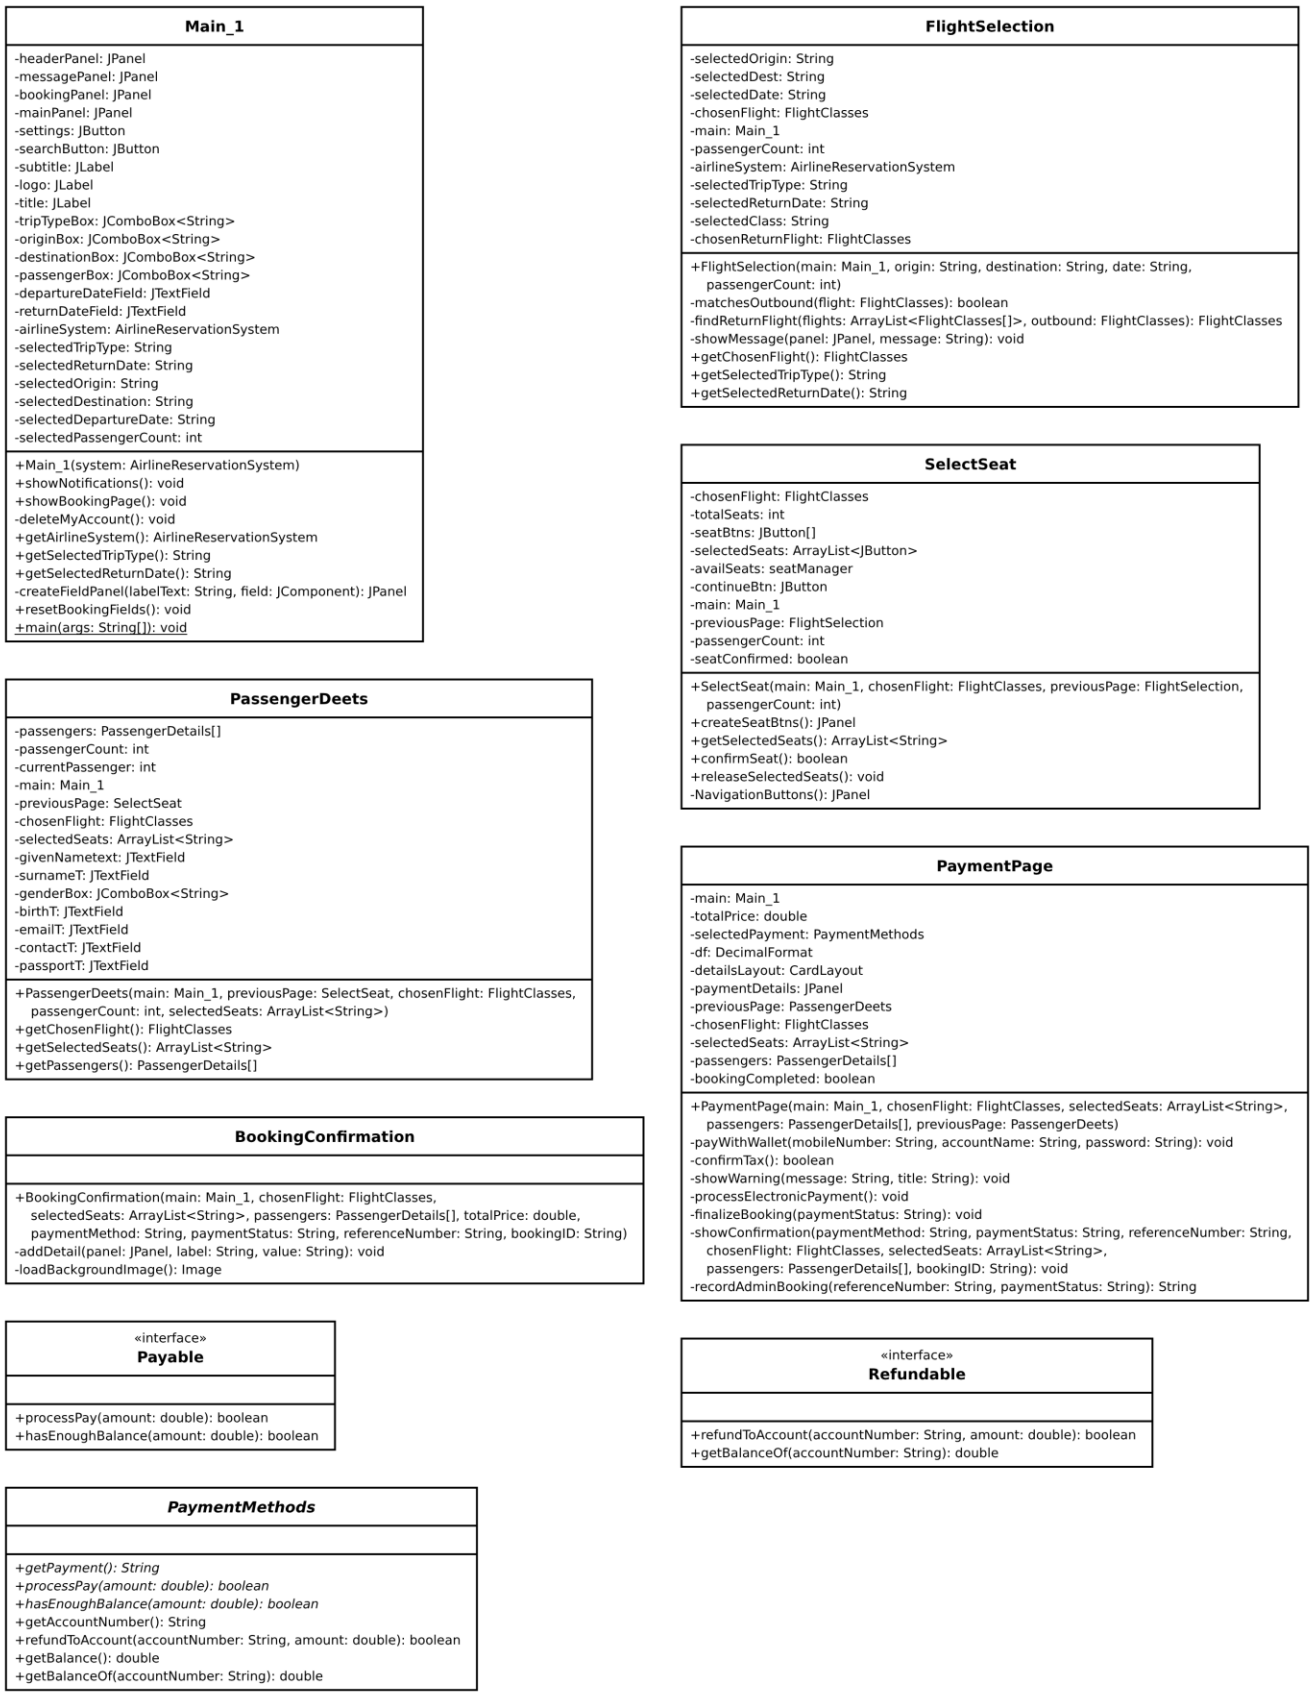

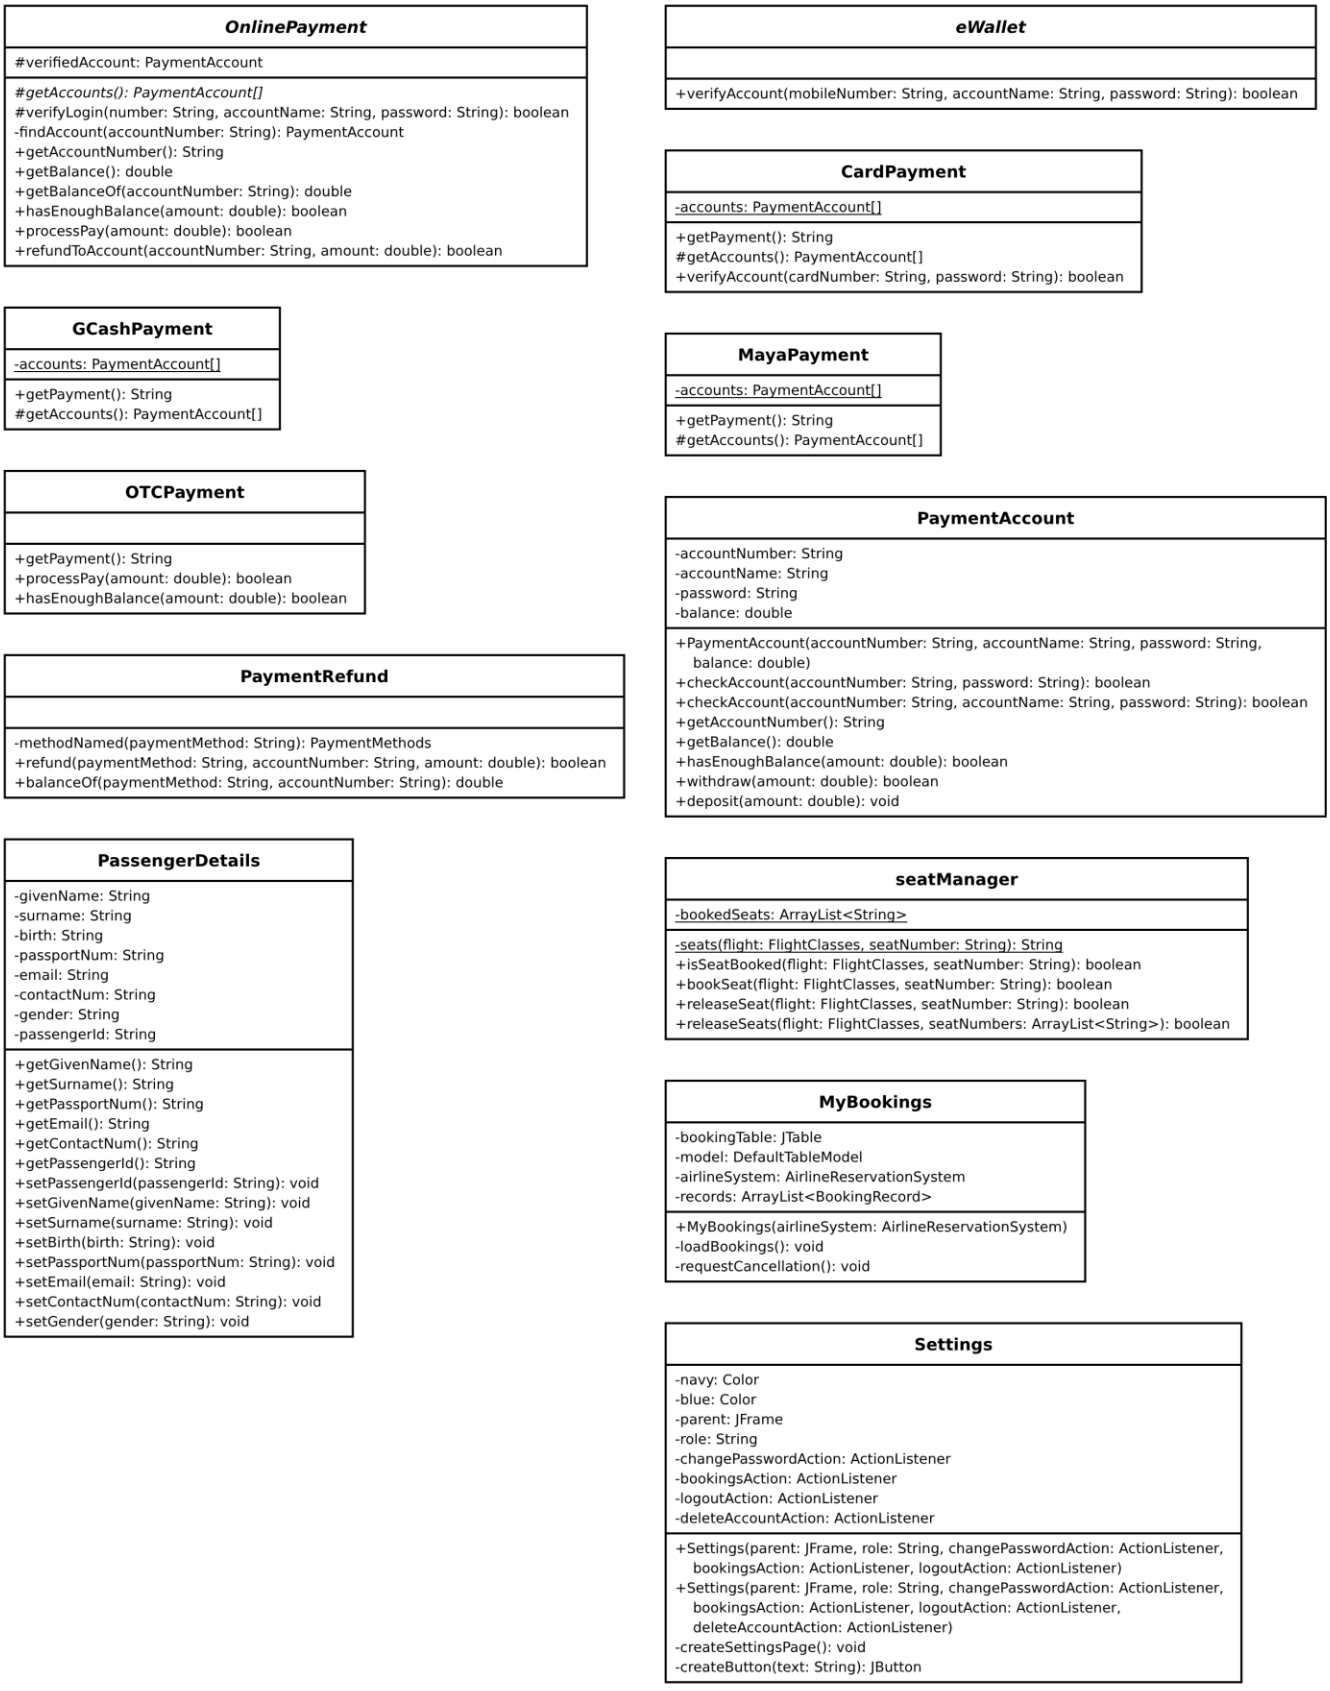
OnlinePayment
#verifiedAccount: PaymentAccount
#getAccounts(): PaymentAccount[]
#verifyLogin(number: String, accountName: String, password: String): boolean
-findAccount(accountNumber: String): PaymentAccount
+getAccountNumber(): String
+getBalance(): double
+getBalanceOf(accountNumber: String): double
+hasEnoughBalance(amount: double): boolean
+processPay(amount: double): boolean
+refundToAccount(accountNumber: String, amount: double): boolean
eWallet
+verifyAccount(mobileNumber: String, accountName: String, password: String): boolean
GCashPayment
-accounts: PaymentAccount[]
+getPayment(): String
#getAccounts(): PaymentAccount[]
CardPayment
-accounts: PaymentAccount[]
+getPayment(): String
#getAccounts(): PaymentAccount[]
+verifyAccount(cardNumber: String, password: String): boolean
MayaPayment
-accounts: PaymentAccount[]
+getPayment(): String
#getAccounts(): PaymentAccount[]
OTCPayment
+getPayment(): String
+processPay(amount: double): boolean
+hasEnoughBalance(amount: double): boolean
PaymentAccount
-accountNumber: String
-accountName: String
-password: String
-balance: double
+PaymentAccount(accountNumber: String, accountName: String, password: String, balance: double)
+checkAccount(accountNumber: String, password: String): boolean
+checkAccount(accountNumber: String, accountName: String, password: String): boolean
+getAccountNumber(): String
+getBalance(): double
+hasEnoughBalance(amount: double): boolean
+withdraw(amount: double): boolean
+deposit(amount: double): void
PaymentRefund
-methodNamed(paymentMethod: String): PaymentMethods
+refund(paymentMethod: String, accountNumber: String, amount: double): boolean
+balanceOf(paymentMethod: String, accountNumber: String): double
seatManager
-bookedSeats: ArrayList<String>
-seats(flight: FlightClasses, seatNumber: String): String
+isSeatBooked(flight: FlightClasses, seatNumber: String): boolean
+bookSeat(flight: FlightClasses, seatNumber: String): boolean
+releaseSeat(flight: FlightClasses, seatNumber: String): boolean
+releaseSeats(flight: FlightClasses, seatNumbers: ArrayList<String>): boolean
PassengerDetails
-givenName: String
-surname: String
-birth: String
-passportNum: String
-email: String
-contactNum: String
-gender: String
-passengerId: String
+getGivenName(): String
+getSurname(): String
+getPassportNum(): String
+getEmail(): String
+getContactNum(): String
+getPassengerId(): String
+setPassengerId(passengerId: String): void
+setGivenName(givenName: String): void
+setSurname(surname: String): void
+setBirth(birth: String): void
+setPassportNum(passportNum: String): void
+setEmail(email: String): void
+setContactNum(contactNum: String): void
+setGender(gender: String): void
MyBookings
-bookingTable: JTable
-model: DefaultTableModel
-airlineSystem: AirlineReservationSystem
-records: ArrayList<BookingRecord>
+MyBookings(airlineSystem: AirlineReservationSystem)
-loadBookings(): void
-requestCancellation(): void
Settings
-navy: Color
-blue: Color
-parent: JFrame
-role: String
-changePasswordAction: ActionListener
-bookingsAction: ActionListener
-logoutAction: ActionListener
-deleteAccountAction: ActionListener
+Settings(parent: JFrame, role: String, changePasswordAction: ActionListener, bookingsAction: ActionListener, logoutAction: ActionListener)
+Settings(parent: JFrame, role: String, changePasswordAction: ActionListener, bookingsAction: ActionListener, logoutAction: ActionListener, deleteAccountAction: ActionListener)
-createSettingsPage(): void
-createButton(text: String): JButton

Package: staff

