What each feature group adds on validation

Feature-group comparisons on validation only | identical patient partitions and fixed model settings

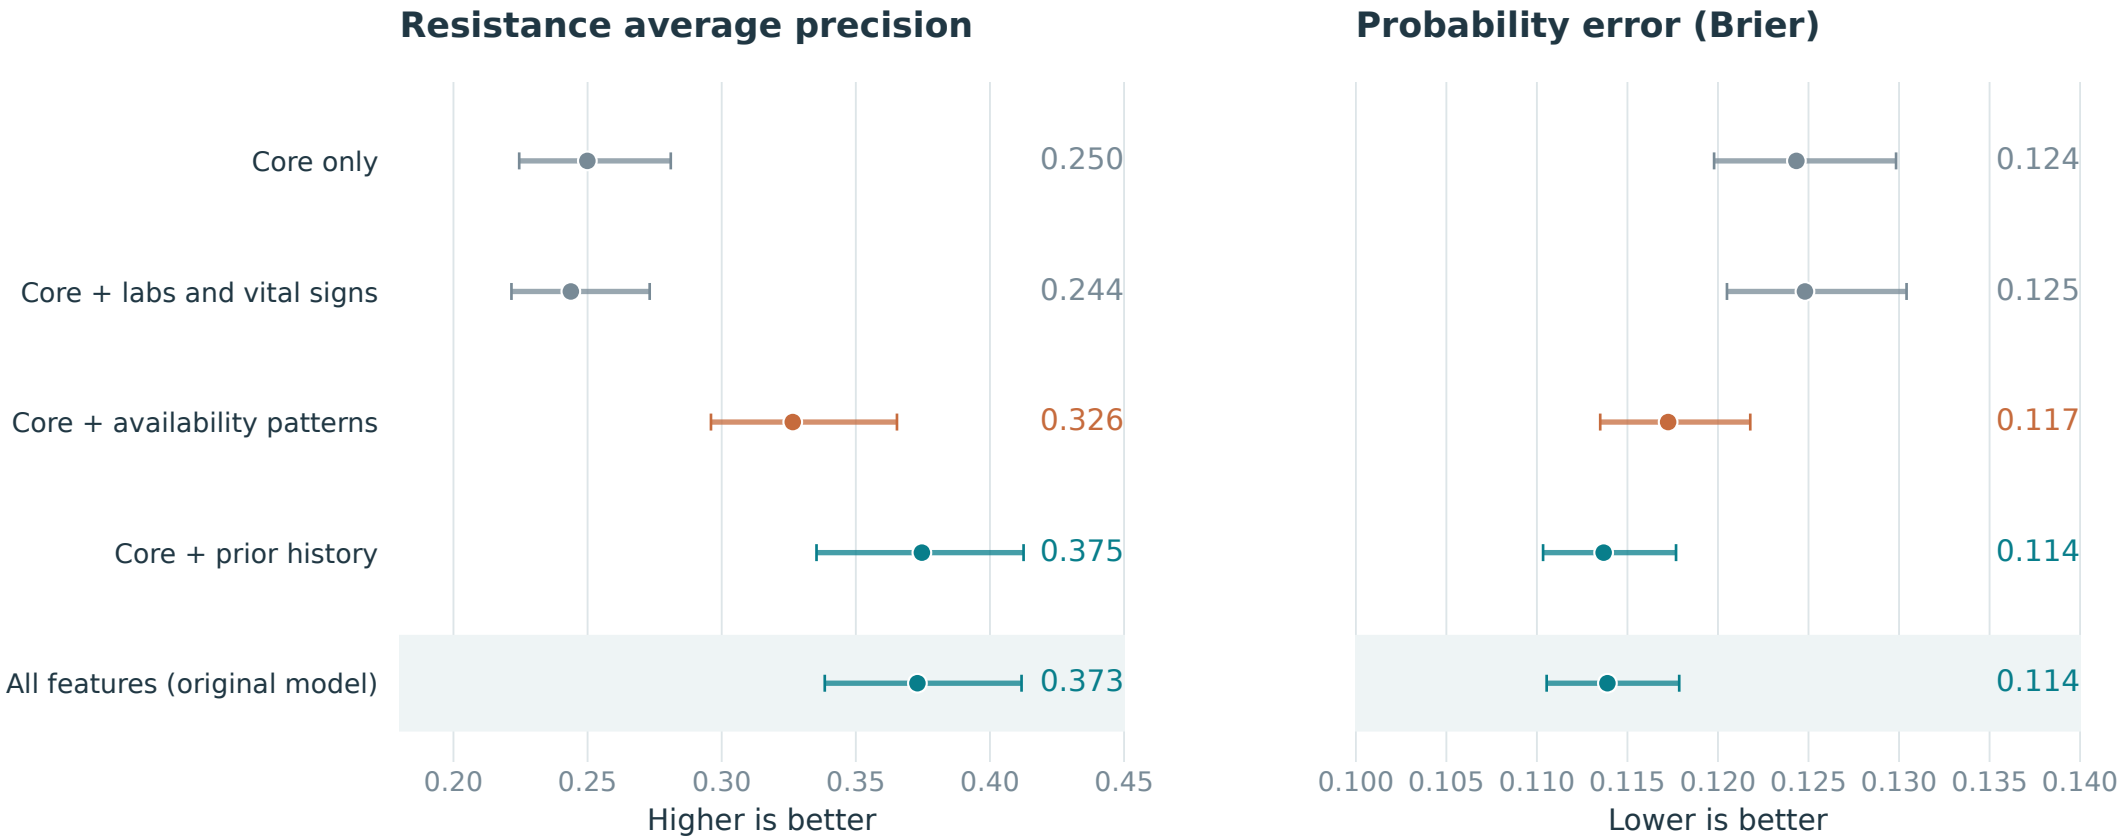

Core = drug, age band, gender code, culture type and ward flags. The availability control keeps missing-value patterns but removes recorded numeric values. Lines are 95% patient-bootstrap intervals (500 shared draws). This experiment is exploratory and does not measure causal effects.