




Dynamic Event Notification Document

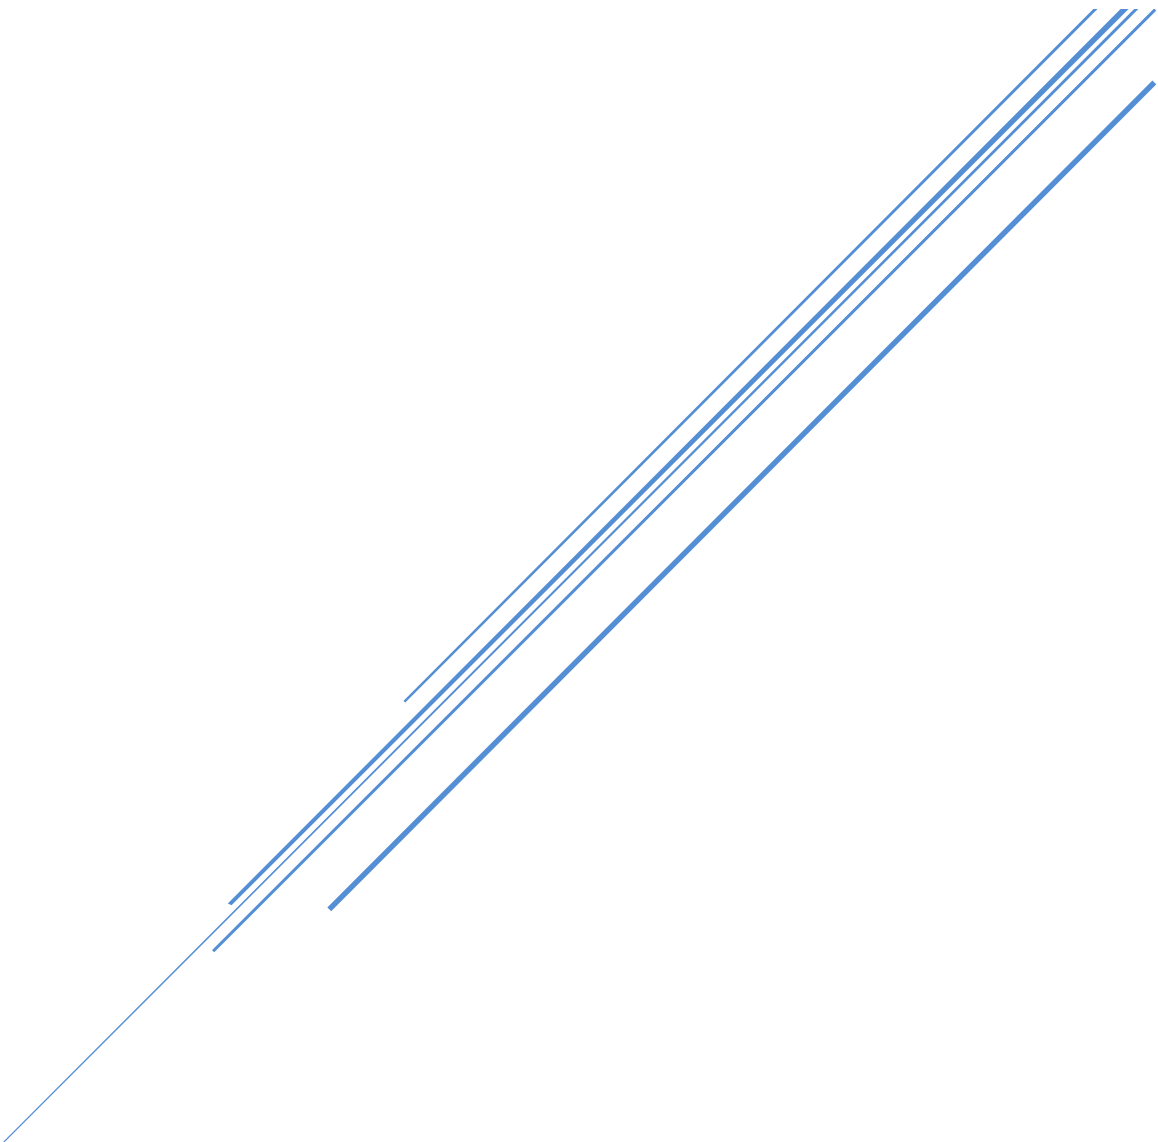

Version 1.1
May 2025

Disclaimer

This document contains information that is proprietary and confidential to **Infibeam Avenues Limited** which shall not be disclosed, transmitted, or duplicated, or used in whole or in part for any purpose other than its intended purpose. Any use or disclosure in whole or in part of this information without the express written permission of **Infibeam Avenues Limited** is prohibited. Any other company and product names mentioned are used for identification purposes only and may be trademarks of their respective owners.

Copyright ©2025 Infibeam Avenues Limited. All rights reserved.

Contents

Dynamic Event Notification 4

 Configure URLs for Events 4

 Response Handling 6

 1. Response Parameters For Order Status..... 7

 2. Response Parameters For Order Status ECHO URLs 11

 3. Response Parameters For Order Reconciliation Status..... 15

 4. Response Parameters For Order Risk Status..... 16

 5. Response Parameters For Payment Type Status..... 17

 6. Response Parameters for Card Tokenization 18

 7. Response Parameters For SI Activation 20

Dynamic Event Notification

CCAvenue **Dynamic Event Notification** enables you to register URLs for various events that occurs in your account. When the event occurs, for example when a successful payment is made in your account, CCAvenue creates an event object. This object contains all the relevant information, including the type of event and the data associated with that event. CCAvenue then sends an HTTP POST request with the event object to URL in your account's web-hook settings.

Configure URLs for Events

Order Status

[View Details](#)

Occurs everytime a payment is completed by the customer.

URL:

Order status echo URL

[View Details](#)

Send the order status in realtime to an alternate URL

URL:

Order Reconciliation Status

[View Details](#)

Occurs everytime when transaction status is updated in reconciliation.

URL:

Order Risk Status

[View Details](#)

Occurs everytime a risk flag is updated for a transaction.

URL:

Payment Type Status

[View Details](#)

Occurs everytime a payment option is down or disabled temporarily, or whenever a new payment option is added.

URL:

Card Tokenization

[View Details](#)

Occurs when the tokenization status is updated.

URL:

Save

SI Active

[View Details](#)

DEN sent after the SI is created and if it is active or inactive.

URL:



1. **Order Status:** If the merchant does not post a returnUrl, and stores a URL in this section, the customer would be redirected to the page specified here. For eg. in invoice payments the CCAvenue page loads with status of transaction, merchant may choose to display his page.
2. **Order status echo URL:** an asynchronous server to server push of the response parameters is done in real time to this alternate URL.
3. **Order Reconciliation Status:** In case the status of any transaction is not known in real-time, CCAvenue periodically does an authStatusQuery to the banks (who provide this facility) and if the status is updated we push the response to the merchant . For the rest of the banks status is posted once the offline recon is done
4. **Order Risk Status :** Whenever any transaction is flagged as High risk or Low risk we notify the merchant vide this call.
5. **Payment Type Status :** CCAvenue does the health check up of the banks. If we notice any fluctuations /downtime the status is pushed to your server.
P.S: In case your server has not received this notification due to any issues, the payment option may be down for longer than it actually. Hence we recommend you use the JSON call regularly to re-check. CCAvenue also sends email notification for the same. Please share your email ids in case you wish to receive gateway monitoring notifications.
6. **Card Tokenization :** In case a new card is getting tokenized or the tokenization status of the card is getting updated we push the response to the merchant.
7. **SI Active :** Response post to merchant whenever there is a change in SI status.

Response Handling

CCAvenue posts the response parameter **encResp** through a URL connection on the merchant's URL. This contains an encrypted value encrypted using the merchant's primary URL's working key mention in MARS panel. The merchant can use the utility to decrypt **encResp**. The parameter string is a separated key-value pair.

Raw Response sent form CCAvenue:

```
encResp=7DA08C0999EEA2FD18C8078FF77B2C95B9CBBD054E7AC1A45D9A761943026D7C1C06B6A867CC1
846C878388616CD203982118A388D51D7930A000549BD4C4DEAD7CC389AB35A017B9EF0B7ACFE9427E288
19A6F9ABB99257F9C0CB6BF4DDD72B4EFF4813A785AADF8981CF7AF8B17018392D43C11B04BFF6743877C0
C0E0A4FC251BC0BE526AA78B21144F16F43AC1885B15B819135C0B7834D5D49BC844357B067465BEA88F46
C8A02D7D4582066976A5C7190DE5E70F372D334D581D540787721FE56B7D59C2960BC9725C03F44EAD5FA
DB144E8883C75AF0C6F203A15319FF0D16975DFDFC8F65D162035FFDD917FF7C4720ED4130F98A1E89EEA3
14D386A0B46EC5A290E06D5BC9250E49C2E5FD0063A5BF47BCF04AFDF8CE15D3B50593BCFC77C341E181D
C05F85A27A22657A9BE784BCB457851CEC03F32F39D9D613387321F742258D26EDB0A26FE2B289011180E8
8D0591BC9F72191BA9C88ECA7D927948469E3B66C6015A39E71F0703C39275810739B7BA4FDE8C0E16986C
D1E9A87D1E4E961C804D294C7402D03F521906E4486FDCBA224086201E7F8172C871904A9D38D01F2D811
508806EAD52610480
```

For example:

```
si_sub_ref_no=SI2429112619260&si_mer_ref_no=124345&si_setup_amount=1.31&si_start_date=2024-10-
17&si_end_date=2026-10-
17&si_amount=1.00&si_currency=INR&si_frequency_type=&si_frequency=0&si_billing_cycle=0&si_create_d
ate=2024-10-17
14:48:26.417&si_type=ONDEMAND&si_amount_limit=null&si_status=ACTI&reference_no=113507265887&s
i_nxt_bill_date=null&token_provisioning_response_code=null&token_provisioning_response_message=null
```

NOTE: Production UAT ports 443 and 80 are enabled by default. Ask merchants to use these ports for their URLs.

1. Response Parameters For Order Status

Name	Description	Type (length)
order_id	Unique ID sent by the merchant at the time of initiating the transaction.	Alphanumeric (40)
tracking_id	Unique payment reference number generated by CCAvenue for each order.	Numeric (16)
bank_ref_no	Reference number generated by the bank for the transaction.	Alphanumeric
order_status	Status of the transaction.	Alphabets (15)
	Success	
	Failure	
	Aborted	
	Invalid	
failure_message	Reason for failure.	Alphanumeric
payment_mode	Mode of payment used by the customer	Alphabets
	Credit Card	
	Net banking	
	Debit Card	
	Cash Card	
	Mobile Payment	
	Wallet	
	Credit Card EMI	
card_name	The name of the card/bank used by the customer to make the payment. Credit Card - Visa, Mastercard, Amex, Netbanking - ICICI, HDFC, SBI etc.	Alphanumeric
status_code	Authorization code received from the bank.	Numeric (3)
status_message	Authorization status message received from the bank.	Alphanumeric (150)
currency	Currency code in which the transaction was processed.	Alphabets (3)
	INR - Indian Rupee	
	USD - United States Dollar	
	SGD - Singapore Dollar	
	GBP - Pound Sterling	
	EUR - Euro, official currency of Eurozone	
amount	Order amount	Numeric (12, 2)
billing_name	Name of the customer	Alphabets (60)
billing_address	Customer's billing address	Alphanumeric (150)
billing_city	Customer's billing city	Alphabets (30)
billing_state	Customer's billing state	Alphabets (30)
billing_zip	Customer's billing zip code	Alphanumeric (15)
billing_country	Customer's billing country	Alphabets (50)

billing_tel	Customer's phone number	Numeric (20)
billing_email	Customer's email address	Alphanumeric (70)
delivery_name	Recipient's name	Alphabets (60)
delivery_address	Shipping address	Alphanumeric (150)
delivery_city	Shipping city	Alphabets (30)
delivery_state	Shipping state	Alphabets (30)
delivery_zip	Shipping zip code	Alphanumeric (15)
delivery_country	Shipping country	Alphabets (50)
delivery_tel	Shipping phone number	Numeric (22)
merchant_param1	Additional information about the transaction sent by the merchant.	Alphanumeric (100)
merchant_param2	Additional information about the transaction sent by the merchant.	Alphanumeric (100)
merchant_param3	Additional information about the transaction sent by the merchant.	Alphanumeric (100)
merchant_param4	Additional information about the transaction sent by the merchant.	Alphanumeric (100)
merchant_param5	Additional information about the transaction sent by the merchant.	Alphanumeric (100)
vault	This parameter can be used if merchant availing the vault option. On using vault functionality if card details are saved at CCAvenue end value returned will be Y. If card details are not saved at CCAvenue end the value returned for this parameter will be N.	Character (1)
offer_type	This parameter can be used for sending additional information if customer has used any discount or promotion while completing the transaction. If customer is using discount-coupon, value of this parameter would be discount. If customer is using promo-code, value of this parameter would be promotion.	Alphabets (9)
offer_code	This parameter can be used for sending additional information about the discount coupon and Promo code used while completing the transaction. If customer has used Discount the value sent would be Discount code. If customer has used Promotion the value sent would be Promo code.	Alphanumeric (30)

sku_code	This parameter is used to show specific promotion mapped to that SKU code to users which is created in CCAvenue Mars, using which you may offer specific discounts to customers	Alphanumeric (50) Characters allowed: Alphabet (A-Z), (az), Numbers and special charcaters ('-' and '_' only)
discount_value	This parameter can be used for sending additional information about the discounted amount.	Numeric (12,2)
mer_amount	Transaction Amount sent by the merchant in encrypted request.	Numeric (12, 2)
eci_value	ECI value as received from 3 D secure.	Numeric (2)
retry	This denotes whether the transaction is a retry transaction or not. Value: Y - Retry Transaction N - Not a Retry Transaction Note: A transaction done for the first time would be marked as 'N', whereas the subsequent valid retry attempts would be marked as 'Y'.	Character (1)
response_code	This is the code assigned to each type of response received from the bank.	Numeric (5)
billing_notes	This parameter returns the billing notes entered by customer on the billing page.	Alphanumeric (150)
trans_date	Transaction Completion Date	DateTime dd/MM/yyyy HH:mm:ss
bin_country	Card issuing country	Alphabets (255)
auth_ref_num	Authorization Reference number is mandatory for token generation. Currently applicable for RuPay and Amex cards.	Varchar (100)
trans_fee	Fees chargeable to customers (Optional)	Numeric (12, 2)
service_tax	Service Tax on Fees chargeable to customers (Optional)	Numeric (12, 2)
si_ref_no	SI Reference Number (Optional in case of SI only)	Alphanumeric (15)
si_created	SI is created or not (Optional in case of SI only) Value: Y - SI created N - SI not created	Character (1)

si_status	Status of the standing instruction request 0 - denotes success. 1 - denotes failure. This parameter is applicable for only for SI transactions.	Alphanumeric (10)
si_mer_ref_no	This is the unique identifier send by the merchant in the request. E.G. For insurance - Policy number. It can also be a customer reference number.	Alphanumeric (30)

2. Response Parameters For Order Status ECHO URLs

Name	Description	Type (length)
order_id	Unique ID sent by the merchant at the time of initiating the transaction.	Alphanumeric (40)
tracking_id	Unique payment reference number generated by CCAvenue for each order.	Numeric (16)
bank_ref_no	Reference number generated by the bank for the transaction.	Alphanumeric
order_status	Status of the transaction.	Alphabets (15)
	Success	
	Failure	
	Aborted	
	Invalid	
failure_message	Reason for failure.	Alphanumeric
payment_mode	Mode of payment used by the customer	Alphabets
	Credit Card	
	Net banking	
	Debit Card	
	Cash Card	
	Mobile Payment	
	Wallet	
	Credit Card EMI	
card_name	The name of the card/bank used by the customer to make the payment. Credit Card - Visa, Mastercard, Amex, Netbanking - ICICI, HDFC, SBI etc.	Alphanumeric
status_code	Authorization code received from the bank.	Numeric (3)
status_message	Authorization status message received from the bank.	Alphanumeric (150)
currency	Currency code in which the transaction was processed.	Alphabets (3)
	INR - Indian Rupee	
	USD - United States Dollar	
	SGD - Singapore Dollar	
	GBP - Pound Sterling	
	EUR - Euro, official currency of Eurozone	
amount	Order amount	Numeric (12, 2)
billing_name	Name of the customer	Alphabets (60)
billing_address	Customer's billing address	Alphanumeric (150)
billing_city	Customer's billing city	Alphabets (30)
billing_state	Customer's billing state	Alphabets (30)
billing_zip	Customer's billing zip code	Alphanumeric (15)
billing_country	Customer's billing country	Alphabets (50)

billing_tel	Customer's phone number	Numeric (20)
billing_email	Customer's email address	Alphanumeric (70)
delivery_name	Recipient's name	Alphabets (60)
delivery_address	Shipping address	Alphanumeric (150)
delivery_city	Shipping city	Alphabets (30)
delivery_state	Shipping state	Alphabets (30)
delivery_zip	Shipping zip code	Alphanumeric (15)
delivery_country	Shipping country	Alphabets (50)
delivery_tel	Shipping phone number	Numeric (22)
merchant_param1	Additional information about the transaction sent by the merchant.	Alphanumeric (100)
merchant_param2	Additional information about the transaction sent by the merchant.	Alphanumeric (100)
merchant_param3	Additional information about the transaction sent by the merchant.	Alphanumeric (100)
merchant_param4	Additional information about the transaction sent by the merchant.	Alphanumeric (100)
merchant_param5	Additional information about the transaction sent by the merchant.	Alphanumeric (100)
vault	This parameter can be used if merchant availing the vault option. On using vault functionality if card details are saved at CCAvenue end value returned will be Y. If card details are not saved at CCAvenue end the value returned for this parameter will be N.	Character (1)
offer_type	This parameter can be used for sending additional information if customer has used any discount or promotion while completing the transaction. If customer is using discount-coupon, value of this parameter would be discount. If customer is using promo-code, value of this parameter would be promotion.	Alphabets (9)
offer_code	This parameter can be used for sending additional information about the discount coupon and Promo code used while completing the transaction. If customer has used Discount the value sent would be Discount code. If customer has used Promotion the value sent would be Promo code.	Alphanumeric (30)

sku_code	This parameter is used to show specific promotion mapped to that SKU code to users which is created in CCAvenue Mars, using which you may offer specific discounts to customers	Alphanumeric (50) Characters allowed: Alphabet (A-Z), (az), Numbers and special characters ('-' and '_' only)
discount_value	This parameter can be used for sending additional information about the discounted amount.	Numeric (12,2)
mer_amount	Transaction Amount sent by the merchant in encrypted request.	Numeric (12, 2)
eci_value	ECI value as received from 3 D secure.	Numeric (2)
retry	This denotes whether the transaction is a retry transaction or not. Value: Y - Retry Transaction N - Not a Retry Transaction Note: A transaction done for the first time would be marked as 'N', whereas the subsequent valid retry attempts would be marked as 'Y'.	Character (1)
response_code	This is the code assigned to each type of response received from the bank.	Numeric (5)
billing_notes	This parameter returns the billing notes entered by customer on the billing page.	Alphanumeric (150)
trans_date	Transaction Completion Date	DateTime dd/MM/yyyy HH:mm:ss
bin_country	Card issuing country	Alphabets (255)
auth_ref_num	Authorization Reference number is mandatory for token generation. Currently applicable for RuPay and Amex cards.	Varchar (100)
trans_fee	Fees chargeable to customers (Optional)	Numeric (12, 2)
service_tax	Service Tax on Fees chargeable to customers (Optional)	Numeric (12, 2)
si_ref_no	SI Reference Number (Optional in case of SI only)	Alphanumeric (15)
si_created	SI is created or not (Optional in case of SI only) Value: Y - SI created N - SI not created	Character (1)

si_status	Status of the standing instruction request 0 - denotes success. 1 - denotes failure. This parameter is applicable for only for SI transactions.	Alphanumeric (10)
si_mer_ref_no	This is the unique identifier send by the merchant in the request. E.G. For insurance - Policy number. It can also be a customer reference number.	Alphanumeric (30)

3. Response Parameters For Order Reconciliation Status

Name	Description	Type (length)
order_id	Unique ID sent by the merchant at the time of initiating the transaction.	Alphanumeric (40)
tracking_id	Unique payment reference number generated by CCAvenue for each order.	Numeric (16)
Bank_ref_no	Reference number generated by the bank for the transaction.	Alphanumeric
order_status	Status of the transaction.	Alphabets (15)
	Success	
	Failure	
	Aborted	
	Invalid	
	Auto-Reversed	
failure_message	Reason for failure.	Alphanumeric
payment_mode	Mode of payment used by the customer	Alphabets
	Credit Card	
	Net banking	
	Debit Card	
	Cash Card	
	Mobile Payment	
	Wallet	
	Credit Card EMI	
card_name	The name of the card/bank used by the customer to make the payment. Credit Card - Visa, Mastercard, Amex Netbanking - ICICI, HDFC, SBI etc.	Alphanumeric
status_message	Authorization status message received from the bank.	Alphanumeric (150)
currency	Currency code in which the transaction was processed.	Alphabets (3)
	INR - Indian Rupee	
	USD - United States Dollar	
	SGD - Singapore Dollar	
	GBP - Pound Sterling	
	EUR - Euro, official currency of Eurozone	
amount	Order amount	Numeric (12, 2)
Order_mer_param1	Additional information about the transaction sent by the merchant.	Alphanumeric (100)
Order_mer_param2	Additional information about the transaction sent by the merchant.	Alphanumeric (100)
si_mer_charge_ref_no	Additional information about the transaction sent by the merchant.	Alphanumeric (25)

4. Response Parameters For Order Risk Status

Name	Description	Type (length)
order_id	Unique ID sent by the merchant at the time of initiating the transaction.	Alphanumeric (40)
tracking_id	Unique payment reference number generated by CCAvenue for each order.	Numeric (16)
risk_status	High - High Risk	Alphanumeric
	Low - Low Risk	
	NR - No Risk	
	GA - Go Ahead	
risk_reason	Transaction originated from High Risk Country List.	Alphanumeric
	Billing Tel number is in our negative database.	
	Shipping Tel Number is in our negative database.	
	Customer country does not match Country where Card was issued.	
	Customer IP is an open proxy IP.	
	Email Id is in our negative database.	
	Card is in our negative database.	
	Transaction did not originate from Country where Card was issued.	
	Customer is using a free email service provider.	

5. Response Parameters For Payment Type Status

Name	Description	Type (length)
card_name	The name of the card/bank used by the customer to make the payment. Credit Card - Visa, Mastercard, Amex Netbanking - ICICI, HDFC, SBI etc.	Alphanumeric
payment_option	Payment option used by the customer	Alphanumeric
	Credit Card	
	Net banking	
	Debit Card	
	Cash Card	
	Mobile Payment	
	Wallet	
	Credit Card EMI	
current_status	Current status of the gateway	Alphabets
	ACTI - Active	
	FLCT - Fluctuate	
	INAC - Inactive	
	DOWN - Down	
	NEW - Newly added Payment option.	

6. Response Parameters for Card Tokenization

Name	Description	Type (length)
Amount	Order amount	Decimal(10,2)
bank_ref_number	Reference number generated by the bank for the transaction.	Alphanumeric(40)
card_name	Name of the card used by the customer. This list would be provided by CCAvenue.	Alphanumeric(20) Allowed Values : (MC,VISA,RuPay etc.)
Currency	Currency in which you want to process the transaction.	Alphabets(5)
	INR – Indian Rupee	
	USD – United States Dollar	
	SGD – Singapore Dollar	
	GBP – Pound Sterling	
	EUR – Euro, official currency of Eurozone	
issuing_bank	Card issuing bank name	Alphanumeric(100) Characters allowed: Alphabet (A-Z), (a-z).
masked_card_number	Masked Card Number	Alphanumeric(20)
merchant_param1 (Conditional)	This parameter can be used for sending additional information about the transaction. Will be included only if UDF parameters are present.	Alphanumeric(100) Characters allowed: Alphabet (A-Z), (a-z). Numbers, # (hash), Comma, circular brackets, /(slash), dot, - (hyphen)
merchant_param2 (Conditional)	This parameter can be used for sending additional information about the transaction. Will be included only if UDF parameters are present.	Alphanumeric(100) Characters allowed: Alphabet (A-Z), (a-z). Numbers, # (hash), Comma, circular brackets, /(slash), dot, - (hyphen)
merchant_param3 (Conditional)	This parameter can be used for sending additional information about the transaction. Will be included only if UDF parameters are present.	Alphanumeric(100) Characters allowed: Alphabet (A-Z), (a-z). Numbers, # (hash), Comma, circular brackets, /(slash), dot, - (hyphen)

merchant_param4 (Conditional)	This parameter can be used for sending additional information about the transaction. Will be included only if UDF parameters are present.	Alphanumeric(100) Characters allowed: Alphabet (A-Z), (a-z). Numbers, # (hash), Comma, circular brackets, /(slash), dot, - (hyphen)
merchant_param5 (Conditional)	This parameter can be used for sending additional information about the transaction. Will be included only if UDF parameters are present.	Alphanumeric(100) Characters allowed: Alphabet (A-Z), (a-z). Numbers, # (hash), Comma, circular brackets, /(slash), dot, - (hyphen)
order_id	This ID is used by merchants to identify the order. Ensure that you send a unique id with each request. CCAvenue will not check the uniqueness of this order id. As it generates a unique payment reference number for each order which is sent by the merchant.	Alphanumeric(40) Characters allowed: Alphabet (A-Z), (a-z), Numbers,- (hyphen),/(slash),_ (underscore)
payment_mode	Payment option selected by the customer	Alphanumeric(10)
	OPTCRDC - Credit Card	
	OPTDBCRD-Debit Card	
reg_id	Registration ID of the merchant created by CCAvenue	Alphanumeric(40)
status_code	The status code for this transaction	Numeric(1) Allowed Values: (0/1/2)
status	Status of the transaction	Alphanumeric(10) Allowed Values: (Success/Failure/Pending)
status_message	The status message for this transaction.	Alphanumeric(100)
tracking_id	Unique payment reference number generated by CCAvenue for each order.	Alphanumeric(40)
token_ref_number (Conditional)	Token reference number Will be included only if the token reference was generated successfully.	Alphanumeric(40)

7. Response Parameters For SI Activation

Parameters	Description	Data type (Length)
si_sub_ref_no	This is reference number created by CCAvenue for each new subscription on the CCAvenue system. This is the number that must be sent with each new “on demand” charge to identify the customer.	Alphanumeric (40) Allowed Values: (0/1/2)
si_mer_ref_no	This is the unique identifier sent by the merchant in the request. E.G. For insurance – Policy number. It can also be a customer reference number.	Alphanumeric (40)
si_setup_amount	Standing Instruction Setup Amount	Alphanumeric (40)
si_start_date	Standing Instruction Start Date	Alphanumeric (40)
si_end_date	Standing Instruction End Date	Alphanumeric (40)
si_amount	Standing Instruction Amount	Decimal(10,2) Allowed Values: (Success/Failure/Pending)
si_currency	Standing Instruction Currency	Alphanumeric (40)
si_frequency_type	Standing Instruction Frequency Type	Alphanumeric (40)
si_frequency	Standing Instruction Frequency	Alphanumeric (40)
si_billing_cycle	Standing Instruction Billing Cycle	Alphanumeric (40)
si_create_date	Standing Instruction Create Date	Alphanumeric (40)
si_type	The Type of Standing Instruction	Alphanumeric (100) Allowed Values: (Fixed, Ondemand, FIXED, ONDEMAND)
si_amount_limit	Standing Instruction Amount Limit	Alphanumeric (40)
si_status	Status of Standing Instruction	Alphanumeric (40) Allowed Values: (ACTI, INAC)
reference_no	Unique payment reference no. generated by CCAvenue to each Order.	Alphanumeric (40)
si_nxt_bill_date	Standing Instruction Next Billing Date	Alphanumeric (40)
token_provisioning_response_code	Token Provisioning Response Code	Alphanumeric (40)
token_provisioning_response_code (conditional)	Token Provisioning Response Message	Alphanumeric (40)