arXiv:2609.11998v1 [cs.LG] 9 Sep 2026

Fixed State, Long Reach: What a Constant-Size Cache Buys Block Diffusion at Scale

Vaibhav Singh[1,2,3*] **Pierre-André Noël**[3] **Torsten Scholak**[3]
Eugene Belilovsky[1,2] **Oleksiy Ostapenko**[3]

[1]Mila [2]Concordia University [3]ServiceNow Research

Abstract

Diffusion language models decode tokens in parallel, but their bidirectional denoiser rules out the naive key–value (KV) cache behind fast autoregressive inference. *Block diffusion* restores caching by decoding block-by-block, and the block caches deployed on it so far are tied to *attention*: $\mathcal{O}(L)$ in memory and, if used as training-free retrofits, only an *approximation* of the model's computation. Both constraints can be overcome: sequence mixers that summarize finalized blocks into a reusable state support block caching, and the corresponding block-causal training objective makes the cache exact. We study this recipe at scale, pretraining three 3B block-diffusion denoisers (attention, mamba, and hybrid) on 300B tokens under one single-frontier objective and decoding all three through a single cached interface. Only the state-space cache is $\mathcal{O}(1)$ in sequence length: its memory and per-step latency stay *constant* at any context length, while an attention cache remains $\mathcal{O}(L)$. At 256k tokens (where attention has grown to 82 GB and 29 ms/step), the Mamba cache delivers **4.3×** lower latency, **11×** less memory, and **2.6×** higher single-stream throughput; and because that footprint is constant it scales with batch as well, reaching **14×** the aggregate throughput, where attention cannot run beyond a single stream. The same linear-state bias lets the Mamba and hybrid backbones keep retrieving out to **8–16×** their training length, whereas attention's retrieval collapses at **2×**, at no measured quality cost.

1 Introduction

Diffusion Language Models (DLMs) have emerged as a compelling alternative to the autoregressive (AR) paradigm that underpins most large language models [5, 1, 8, 34]. Masked DLMs such as LLaDA [24] and Dream [41] corrupt a sequence by masking tokens and learn to denoise it, decoding many positions in parallel rather than one token at a time. This promises lower latency and richer per-example supervision [23]. In practice, however, DLM inference has often been *slower* than AR: the very bidirectional attention that makes denoising possible rules out the naive key–value (KV) cache that AR decoders rely on, so each denoising step recomputes attention over the entire sequence [39, 21].

Block diffusion [2] resolves the tension by interpolating between the two regimes: the sequence is partitioned into blocks that are generated autoregressively, while diffusion denoising runs *within* each block. Because finalized blocks form a clean prefix, their representations can be cached and reused, restoring KV-caching and enabling arbitrary-length generation. This has made block diffusion the foundation of recent fast-decoding systems [39, 38, 37].

Two limitations remain. First, the block caches deployed so far are built for an attention backbone [39, 21, 18, 22]; the resulting KV-cache still grows linearly in context length and the underlying attention

*Correspondence to: vaibhav.singh@mila.quebec


still costs quadratic compute, so the long-context regime stays expensive. Second, many of these methods are *training-free* adaptations onto full-attention models, which makes their block cache an *approximation* of the true bidirectional computation [39]. Neither limitation is intrinsic to block diffusion, which only requires that finalized blocks summarize into a reusable state: any sequence mixer with such a state qualifies, and training with the block-causal objective makes the resulting cache exact rather than approximate [2].

State-space models (SSMs) such as Mamba [12, 9] are exactly such mixers. They process a sequence with a linear-time recurrence whose hidden state is a fixed-size summary of the past, independent of how long the past is. We build on the bidirectional-Mamba DLM denoiser of DiffuMamba [32] and use its recurrent state as the block cache: when block diffusion finalizes a block, the forward SSM state already encodes the entire prefix in $\mathcal{O}(1)$ memory. Concurrent work [7] has recently shown, at small scale (87M–350M parameters), that a Mamba–attention block-diffusion hybrid admits exactly such a cache once the reverse Mamba scan is confined to the active block. Whether this holds when pretrained at scale, how a *pure* Mamba denoiser fares, and what a constant-size state delivers on long-context *retrieval* rather than throughput alone, has not been studied. We therefore expose the SSM state together with the attention KV-cache and a hybrid of the two through a single decoding interface, and we *pretrain* all three models at 3B parameters under the same block-causal objective, so that cached decoding reproduces training exactly.


Concretely, we pretrain and analyze three 3B-parameter block-diffusion models on 300B tokens that share data, tokenizer, schedule, and decoding budget and differ only in the denoiser: `Attn` (full attention), `Mamba` (bidirectional Mamba-2), and `Hybrid` (attention interleaved every five Mamba layers). Because the Mamba mixer carries larger projections while the MLP is held fixed, `Mamba` and `Hybrid` technically have 13% and 11% more parameters than `Attn`; Section 5.4 shows that these extra parameters add a fixed $\mathcal{O}(d^2)$ cost per token at every context length, whereas attention's score computation costs $\mathcal{O}(Ld)$ per token and grows with context. Per-token FLOPs are comparable at the training length, and the long-context gap is due to the mixer rather than the parameter budget. Our contributions are:

- **A controlled 3B pretraining study of cacheable block-diffusion denoisers** (Sections 3 and 4): attention, bidirectional Mamba-2, and hybrid backbones, each pretrained on 300B tokens under the same single-frontier block-causal objective. As in BD3LM [2] for attention and, concurrently, Chaturvedi et al. [7] for Mamba hybrids, the cache is exact because the models are trained with the objective used at decode time; unlike training-free retrofits, cached inference *is* the function the model learned. To our knowledge this is the largest such study, and the only one that includes a *pure* state-space denoiser.
- **Constant memory and long context from a single linear-state backbone** (Sections 5.1 and 5.2). Measured on the trained checkpoints, the SSM cache is $\mathcal{O}(1)$ in length: `Mamba` holds $\sim$7.5 GB and 6.8 ms/step at *every* length out to 256k, against attention's 82 GB, reaching $\mathbf{14\times}$ the aggregate throughput at 256k. The same backbone also generalizes far past its 1024-token training length: `Attn`'s retrieval collapses just $2\times$ out on NIAH and LongBench, whereas `Mamba`/`Hybrid` extrapolate to $\mathbf{8\text{–}16\times}$.
- **Long-context evaluation at scale** (Section 5). With everything but the denoiser held fixed, we cover cached-decoding efficiency (latency, memory, and throughput) out to 256k tokens, NIAH and LongBench length extrapolation, an eight-task downstream suite, MAUVE and generative perplexity, and a per-layer FLOPs analysis that attributes the gains to the *architecture* rather than to parameter count.

None of these properties is new to state-space models. Fixed-size state [12, 9] and length extrapolation [10, 28] are established properties of *autoregressive* SSMs, with hybrids restoring the recall that pure recurrence lacks [35, 16]. Whether they carry over to diffusion denoisers, which decode several tokens per pass, is open. Our results are the block-diffusion counterpart of that AR literature, and the combination matters because block diffusion reveals several tokens per forward pass rather than one, and a linear-state backbone lets it do so on a state that never grows. Singh et al. [32] showed Mamba denoisers match attention on quality at the training length, and Chaturvedi et al. [7] that they can be block-cached like attention [2] at small scale; we show that the same backbones, pretrained at 3B, *decode* long contexts with a constant-memory cache and retrieve far past their training length, extending the case for linear-state diffusion LMs from training to inference and from throughput to long-context retrieval.

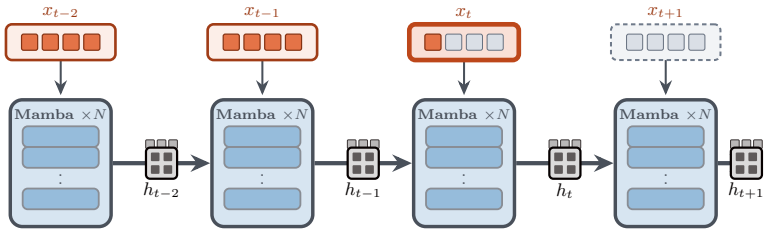

(a) `Mamba/Hybrid`: a single recurrent state h of fixed shape $\mathbb{R}^{H\times P\times N}$, carried and updated in place ($h_t = \bar{A}_t\, h_{t-1} + \bar{B}_t\, x_t$), $\mathcal{O}(1)$ in sequence length.

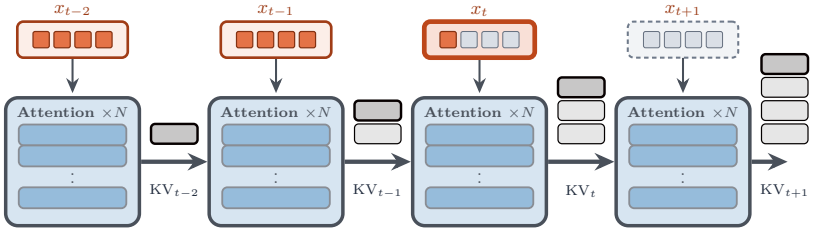

(b) `Attn`: the key–value memory, which appends one entry per block ($\mathrm{KV}_{t-2} \to \mathrm{KV}_{t+1}$) and therefore grows as $\mathcal{O}(L)$.

Figure 1: **The unified block cache.** Block diffusion decodes one block at a time, left to right: finalized blocks (x_{t-2}, x_{t-1}) are clean, the frontier block x_t is being denoised (its first token is revealed, the rest are `[MASK]`), and future blocks (x_{t+1}) stay fully masked. Once a block is finalized, every layer writes its state into a cache that the next block reads, so the clean prefix is never recomputed. The cached object depends on the backbone.

2 Background and Related Work

Masked diffusion language models. Discrete diffusion models define a forward process that progressively corrupts a token sequence and learn a parameterized reverse process that denoises [3, 6]. The *masked* (absorbing-state) instantiation has proven the most effective for language: SEDD [20], MDLM [29], and their refinements [31, 30] train a bidirectional network to recover masked tokens under a noise schedule, and LLaDA [24] and Dream [41] scale this recipe to billions of parameters. All decode by iteratively unmasking positions in parallel; none admits a KV-cache natively, because every denoising step attends over the full (partially masked) sequence in both directions.

Block diffusion. BD3LM [2] interpolates between AR and diffusion: tokens are grouped into blocks generated left-to-right, with intra-block diffusion. Blocks already produced act as a clean prefix, so their keys and values can be cached between blocks, and sequences of arbitrary length can be generated. Our attention model follows this scheme; we use the name `Attn` rather than "BD3LM" to keep our trained model distinct from the cited training recipe. Subsequent systems build fast decoders on this foundation [39, 38, 37].

Caching for diffusion LMs. Because the bidirectional denoiser blocks the standard KV-cache, a line of work restores caching for attention DLMs. Fast-dLLM [39] introduces a block-wise *approximate* KV-cache plus confidence-aware parallel decoding, reporting large speedups on LLaDA/Dream by caching the fixed context and refreshing it at block boundaries; dKV-Cache [21] proposes a delayed KV-cache compatible with bidirectional attention; and dLLM-Cache [18] and elastic-cache variants [22] add adaptive eviction and reuse. A more recent wave targets the *long-context* regime specifically: Prefilling-dLLM [40] caches chunked prefix KV and keeps the top-K relevant chunks, and Focus-dLLM [19] exploits attention sparsity for dynamic cache eviction, reporting 9–28$\times$ speedups at 8–32k. A separate line extends the *usable* context of attention DLMs by rescaling positional encodings: LongLLaDA [17] applies training-free NTK-RoPE (and documents a "local perception" sliding-window bias), while UltraLLaDA [14] *trains* to a 128k window. All of these caches are attention-only and $\mathcal{O}(L)$ in memory, and, being largely training-free retrofits, only *approximate* the full-attention computation they replace. The exception is training-time block-causal schemes,

Algorithm 1 Cached block-wise generation

Require: prefix, block size G, steps per block S, blocks K, mask id

$cache \leftarrow \varnothing$; warm $cache$ on the clean prompt blocks
for $i \leftarrow i_{\text{first}}$ **to** $K-1$ **do**
  $s \leftarrow \textsc{Clone}(cache)$ ▷ entry state, reused across denoising steps
  $m \leftarrow$ # masked tokens in block i
  for $t \leftarrow 1$ **to** S **do**
    $\ell \leftarrow \textsc{ForwardBlockCached}(x_i,\ s,\ \mathrm{pos}_i)$
    reveal the $\lceil m/S \rceil$ highest-confidence masked positions of x_i using ℓ
    if block i fully revealed **then**
      break
    end if
  end for
  $_,\ cache \leftarrow \textsc{ForwardBlockCached}(x_i,\ s,\ \mathrm{pos}_i)$ ▷ fold finalized block into cache
end for
return x

BD3LM [2] for attention and, concurrently with this work, Chaturvedi et al. [7] for Mamba–attention hybrids, whose caches are exact because the model is trained on the same clean-prefix computation it decodes with; our models belong to this family.

State-space models and hybrids. SSMs model sequences with a linear-time selective recurrence: S4 [13], Mamba [12], and Mamba-2 [9] match or beat attention on language while carrying a fixed-size state, and related structured operators [27, 11] share the linear-time property. Hybrid AR models interleave attention with linear recurrence to combine global recall with cheap long-range mixing [16, 10, 36]. DiffuMamba [32] brought bidirectional Mamba and Mamba–attention hybrids to *diffusion* denoisers. Chaturvedi et al. [7] trained block cache diffusion models at a small scale with Mamba–attention hybrids of 87M and 350M parameters.

What this study adds is scale and evidence: pretraining at 3B parameters and 300B tokens with all three backbones, including a *pure* Mamba denoiser absent from that work; a single-frontier objective; latency, memory, and throughput measured on the trained checkpoints, single-stream and batched; and, most importantly, long-context *retrieval* and length extrapolation (NIAH, LongBench) alongside downstream and generation quality. Our claim is therefore not the mechanism but its behavior at scale: constant-memory block decoding survives pretraining at 3B and comes with a marked long-context retrieval advantage over the attention baseline.

3 Method

3.1 Block-diffusion preliminaries

Let $x = (x_1, \ldots, x_L)$ be a token sequence. A masked diffusion model defines a forward process that, at time $t \in (0, 1]$, independently replaces each token by a special `[MASK]` symbol with probability $1 - \alpha_t$, where α_t follows a monotone schedule. The denoiser f_θ is trained to predict the original tokens from the masked sequence, minimizing a re-weighted cross-entropy that forms a negative ELBO on the data log-likelihood [29, 24].

Block diffusion factorizes the sequence into $K = L/G$ contiguous blocks of size G and is autoregressive across blocks: block i is generated conditioned on the clean blocks $0, \ldots, i-1$, while the tokens *inside* block i are produced by diffusion. We train with a **single-frontier** objective (Figure 1): for each example we sample one frontier block i, keep blocks $< i$ clean, mask a time-dependent random subset of block i, and mask blocks $> i$ *entirely*; the loss is the re-weighted cross-entropy on the masked positions of block i only. This exactly matches the information available during cached generation, where block i sees a clean prefix and all-masked future. The frontier structure is enforced differently per backbone. *Attention* layers use a **block-causal** mask: a query in block i attends to all keys in blocks $\leq i$ (bidirectionally within its own block) and to none in blocks $> i$. *Mamba* layers run a forward (left-to-right) recurrence over the whole prefix, and a backward (right-to-left) recurrence whose support is *restricted to the frontier block*, so that no information leaks backward

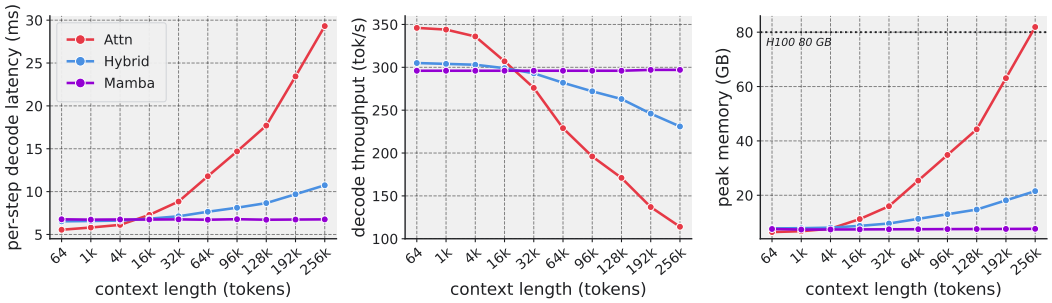


Figure 2: **Cached-decoding efficiency vs. context length (3B, single H100 80 GB, `bf16`, cudagraph, batch 1).** (a) per-step decode latency, (b) end-to-end decode throughput (S=16), (c) peak memory. `Mamba` is flat at every length to 256k (constant SSM state), while `Attn` grows as $\mathcal{O}(L)$: by 256k `Mamba` is $\mathbf{2.6}\times$ faster (296 vs. 114 tok/s) at $\mathbf{11}\times$ less memory (7.5 vs. 82 GB); `Hybrid` interpolates. Figure 4 sweeps batch 1–8.

from the masked future (the block-restricted reverse scan that Chaturvedi et al. [7] term *partial bidirectionality*). The hybrid applies both rules, layer by layer.

3.2 A unified block cache

At inference the blocks are produced strictly left-to-right, so once block i is finalized its contribution to every future block is fixed. We expose a single per-layer interface that consumes only the G tokens of the current block plus a per-layer cache summarizing blocks $0, \ldots, i{-}1$, and returns the block logits and an updated cache. The cache type is backbone-specific (Table 1). In the attention layers, for the G new tokens, we compute queries, keys, and values, and then concatenate the new keys/values with the cached (K, V) of all finalized blocks. The attended context is the clean prefix plus the current block; the cache grows as $\mathcal{O}(L)$ and the per-step cost is $\mathcal{O}(GL)$.

A Mamba-2 layer maintains two states that together summarize the prefix: a short causal-convolution state (the last $k{-}1$ inputs, where k is the conv width) and the selective-SSM recurrent state of shape $(\text{heads} \times \text{head_dim} \times d_{\text{state}})$. The forward recurrence consumes the cached states, emits the block output, and returns updated states via a chunked scan with initial states; both states are *independent of* L. The backward (bidirectional) recurrence is re-run from a zero state *within the current block only*, reproducing the frontier restriction used in training; it is never carried across blocks. Thus the Mamba cache is $\mathcal{O}(1)$ in length and the per-step cost is $\mathcal{O}(G^2)$, independent of how much text precedes the block. Lastly the hybrid denoiser interleaves the two layer types, so its cache is a heterogeneous list: attention layers store (K, V) tensors and Mamba layers store $(\text{conv}, \text{ssm})$ states. The overall memory is dominated by the (few) attention layers, giving a cost between those of the two pure backbones.

3.3 Inference via cached generation

Generation proceeds block by block (Algorithm 1). Entering block i, we clone the layer cache so its entry state can be reused across the block's denoising steps (each cached forward returns fresh tensors and never mutates its inputs). We then run S denoising steps: at each step a cached forward pass scores the current block, and we reveal the $\lceil m/S \rceil$ highest-confidence still-masked positions, where m is the number of masked tokens at block entry. Once the block is fully revealed, one final cached pass folds it into the cache that block $i{+}1$ reads. With S the only quality–speed knob, the total number of forward passes is $\mathcal{O}(KS) = \mathcal{O}((L/G)S)$, and for the SSM backbone each pass touches only the G current tokens regardless of L.

3.4 Complexity and asymptotic throughput

Table 1 summarizes the cost of one cached denoising step and the state it carries. Decoding the frontier block of G tokens against a prefix of length L costs $\mathcal{O}(GL)$ for attention – each new query attends over the growing KV-cache – so its per-step latency grows linearly in L and the decode throughput scales as $T = \mathcal{O}(1/L)$. The Mamba model consumes a fixed-size SSM state and touches only the G current tokens, giving an L-independent per-step cost of $\mathcal{O}(G^2)$ and hence constant throughput. The hybrid inherits the attention scaling with a small constant ($5/28$ of its layers carry attention). Section 5.1 measures exactly these three curves.

Table 1: **Three denoisers, one variable: the mixer.** The 3B models share d_{model}, depth, block size G, and differ only in the sequence mixer. The right block gives each backbone's per-step decode cost over a block of G tokens against a prefix of length L: only the SSM cache is $\mathcal{O}(1)$ in L (conv+SSM state vs. an $\mathcal{O}(L)$ KV-cache), the root of `Mamba`'s flat memory and latency; *small constant ($5/28$ layers carry attention).

	Configuration						Per-step cost (block G, prefix L)		
Model	d_{model}	**Layers**	**Mixer**	G	**Train ctx.**	**best val. NLL**	**Compute**	**Cache mem**	**Throughput**
`Attn`	2560	28	28 attn	32	1024	1.104	$\mathcal{O}(GL)$	$\mathcal{O}(L)$	$\mathcal{O}(1/L)$
`Hybrid`	2560	28	5 attn + 23 Mamba	32	1024	1.102	$\mathcal{O}(GL)^*$	$\mathcal{O}(L)^*$	$\mathcal{O}(1/L)^*$
`Mamba`	2560	28	28 bidir. Mamba-2	32	1024	1.134	$\mathcal{O}(G^2)$	$\mathcal{O}(1)$	$\mathcal{O}(1)$

4 Experimental Setup

Models. We compare three 3B-parameter denoisers that are identical except for the sequence mixer (Table 1): `Attn` (28 attention layers), `Mamba` (28 bidirectional Mamba-2 layers), and `Hybrid` (5 attention layers interleaved with 23 Mamba layers, following Singh et al. [32]). All models use $d_{\text{model}} = 2560$, block size $G = 32$ and are trained on Nemotron-CC [33] with 300B token budget under the single-frontier block-diffusion objective (Section 3.1) which masks a random subset of a single sampled frontier block per example, keeping earlier blocks clean and later blocks fully masked, so training sees exactly the clean-prefix, all-masked-future context each block meets at cached decode time. We trained with sequence length of 1024 tokens, and the global batch being 4096 sequences ($1024 \times 4096 \approx 4.2$M tokens per step) with a 71 525-step schedule covering $1024 \times 4096 \times 71\,525 \approx 300$B tokens. Optimization is AdamW in `bf16` (learning rate 1×10^{-4}, cosine schedule, 5% warmup, weight decay 0.1, gradient-norm clip 1.0); the complete set of training and model hyperparameters is in Section A.

Hardware and timing. All efficiency measurements use a single NVIDIA H100 80 GB in `bf16` with PyTorch SDPA attention kernels. We time one denoising step by CUDA-graph capture which removes kernel launch overhead, and report the mean of 50 replays under CUDA events. End-to-end decode throughput is the ratio of total tokens generated to the total time to decode them, adding up each block's latency at its true cache depth (block i is decoded against a prefix of length $i \cdot G$).

Evaluation protocols. We measured *Efficiency* by sweeping context length L from 64 to 256k tokens at batch sizes 1–8, and report per-step decode latency, peak memory, and end-to-end decode throughput at S=16 denoising steps per block. For *Long Context Performance* we measure retrieval with a RULER-style [15] needle-in-a-haystack (NIAH) passkey task, where a short key is hidden at one of five depths inside a long distractor context and must be recovered (20 trials per (length, depth), L from 512 to 16k). We further evaluated the models on LongBench [4], a 16-task English-and-code long-context suite (middle-truncated to L, 20 examples per task, L from 2k to 16k). For the attention backbones we additionally report an NTK-RoPE variant [25, 17]: a training-free rescaling of RoPE's rotation frequencies that folds the longer positions seen at inference back toward the range covered during training, extending the usable window without any fine-tuning. For *Downstream Performance* we score eight common-sense / reasoning tasks with the block-diffusion likelihood harness, and for evaluating *Generation Quality* we report generative perplexity (scored by GPT-2 large) alongside MAUVE [26], which quantifies the distributional gap between generated and reference text.

5 Results

5.1 Efficiency: the state-space cache is constant in length

Figure 2 and Table 9 report per-step latency, peak memory, and decode throughput against context length at batch 1. The Mamba block cache delivers exactly $\mathcal{O}(1)$ complexity across the whole 64–256k-token range, i.e. `Mamba` holds a *flat* 6.8 ms per step, 7.5 GB of memory, and ∼296 tok/s, its state never growing with the prefix. `Attn` instead pays the $\mathcal{O}(L)$ KV-cache in every panel: from 64 to 256k tokens its latency climbs 5.5 → 29 ms (5.3×), its decoding throughput falls 346 → 114 tok/s (3×), and its memory balloons 6.5 → 82 GB, essentially the whole GPU. By 256k, `Mamba` thus beats `Attn` on all three axes at once: **4.3×** lower latency (6.8 vs. 29 ms), **11×** less memory (7.5 vs. 82 GB), and **2.6×** higher throughput (297 vs. 114 tok/s). `Hybrid` is the pragmatic sweet spot: with only 5 of its 28 layers attentional it tracks the attention curves at $5/28$ of the slope, so at 256k it keeps

Table 2: **Attention collapses at $2\times$ train length; linear state extrapolates to 8–$16\times$.** Needle-in-a-haystack passkey retrieval accuracy (%) vs. context length L (3B; trained at $L{=}1024$, so $L{\geq}2$k is extrapolation). "+NTK" adds NTK-RoPE to the attention-bearing models; best per length shaded. `Attn` drops to 12% at $2\times$ and 0% by $8\times$, while `Mamba/Hybrid` still retrieve needles at $16\times$.

L (= ×train)	512	1k (1×)	2k (2×)	4k (4×)	8k (8×)	16k (16×)
`Attn`	100	100	12.3	1.7	0	0
`Attn`+NTK	100	100	12.3	1.7	0	0
`Hybrid`	98.7	100	53.4	37.9	23.0	2.3
`Hybrid`+NTK	98.7	100	53.4	37.9	26.1	14.3
`Mamba`	99.0	99.0	75.7	32.3	23.6	22.3

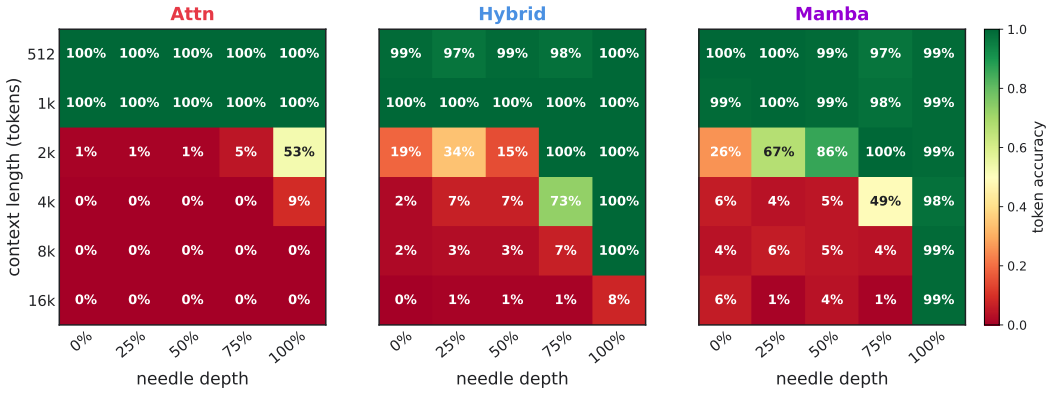


Figure 3: **NIAH retrieval by needle depth × context length (3B).** Token accuracy at five depths (0% = oldest, 100% = most recent) across lengths. `Attn` collapses almost uniformly past the 1024-token training length; `Mamba/Hybrid` degrade *gracefully* and retain near-perfect retrieval of *recent* needles (rightmost column: `Mamba` 99% at $16\times$ training length; per-depth numbers in Section B). This matches the "local perception" / sliding-window behavior reported for diffusion LMs by LongLLaDA [17], which appears here as a property of the linear-state backbone rather than of an approximate cache.

full attention for global recall while still beating `Attn` by **2.7×** on latency (10.7 vs. 29 ms), **3.8×** on memory (21.5 vs. 82 GB), and **2.0×** on throughput (231 vs. 114 tok/s).

The constant footprint pays off most under batching as shown in Figure 4: because `Mamba`'s per-stream memory does not grow, many sequences fit on one accelerator, and at 256k it sustains 1593 tok/s at batch 8 (a flat ∼8 GB), whereas `Attn`'s $\mathcal{O}(B \cdot L)$ KV-cache is already out of memory at batch 2 and capped at 114 tok/s; a **14×** aggregate-throughput advantage (Appendix C). This dominance is a long-context effect: below ∼16k the three backbones sit within a few percent (with `Attn` marginally ahead on its cheap short-context blocks), but where long-context decoding actually lives, at tens to hundreds of thousands of tokens, `Mamba` and `Hybrid` win on latency, memory, and throughput at once.

5.2 Long-context generalization: linear state extrapolates, attention collapses

The position-free recurrence that makes the SSM cache cheap also makes it length robust. The mechanism is the block-causal mask: regardless of block size, a query still attends over the *entire* clean prefix, so past $L{=}1024$ the attention layers meet absolute RoPE positions and prefix lengths never seen in training (an out-of-distribution regime), whereas the recurrent state carries no positions and simply folds a longer prefix into the same fixed-size memory. Table 2 bears this out on NIAH passkey retrieval. Within the 1024 training length all three models retrieve near-perfectly; at $2\times$ ($L{=}2$k) `Attn` *collapses* to 12% while `Hybrid` holds 53% and `Mamba` 76%, and by $16\times$ ($L{=}16$k) `Attn` sits at 0% while `Mamba` still recovers 22% of needles. `Mamba` owns the highest floor at the extremes ($2\times$ and $16\times$) and `Hybrid` the middle of the range ($4\times$, and $8\times$ with NTK-RoPE).

The same pattern holds on *realistic* tasks (Table 3). `Mamba` is the strongest backbone and barely degrades with length, holding essentially constant at 10.2–11.2 from 2k to 16k and ahead of `Hybrid`

Table 3: **On realistic long-context tasks, linear state stays flat while attention slides.** LongBench macro-average (%) over 16 English+code tasks vs. length L (3B, cached greedy decoding, middle-truncation, 20 examples/task; every row $L \geq 2$k is extrapolation from the 1024 training length). "+NTK" = NTK-RoPE on the attention-bearing models; best per length shaded. `Mamba` holds 10.2–11.2 throughout; `Attn` more than halves by 4k and reaches 3.6 at 16k.

L	`Attn`	`Attn`+NTK	`Hybrid`	`Hybrid`+NTK	`Mamba`
2k	7.07	7.07	10.83	10.83	11.20
4k	4.65	4.65	10.39	10.39	10.45
8k	3.96	4.66	9.30	9.83	10.46
16k	3.64	4.75	9.13	8.10	10.18

Table 4: **Constant-memory decoding at no downstream cost.** Accuracy on eight common-sense/reasoning tasks (3B) via the block-diffusion likelihood harness (block-decomposed MC-ELBO, 128 samples, CFG 0.5); **Avg** is the mean, best shaded. `Attn` and `Hybrid` tie (0.434/0.432) and `Mamba` trails by $\sim$1 point.

Model	PIQA	ARC-c	HSwag	OBQA	BoolQ	SciQ	CSQA	SIQA	Macro
`Attn`	0.655	0.226	0.347	0.210	0.616	0.829	0.188	0.400	**0.434**
`Hybrid`	0.663	0.224	0.339	0.214	0.621	0.815	0.187	0.392	0.432
`Mamba`	0.658	0.230	0.334	0.194	0.581	0.778	0.198	0.392	0.421

Table 5: **One dial, S, trades quality for speed.** Per-block denoising budget S (3B, cached generation, 64 $\rightarrow$ 128-token continuations, 512 samples): larger S monotonically lowers Gen-PPL and broadly raises MAUVE, at 5–6$\times$ lower throughput (best per column shaded). MAUVE (k-means over GPT-2-large features) is noisy for small base models, so Gen-PPL is the cleaner signal.

	MAUVE ↑			Gen-PPL ↓		
S	`Attn`	`Hybrid`	`Mamba`	`Attn`	`Hybrid`	`Mamba`
4	0.055	0.050	0.043	15.26	17.14	18.50
8	0.141	0.148	0.099	12.10	12.85	13.05
16	0.236	0.289	0.287	9.22	9.06	9.50
32	0.180	0.210	0.190	6.44	6.48	6.52

(10.8$\rightarrow$9.1) at every length. `Attn`, by contrast, falls by a third by 4k (7.1$\rightarrow$4.7) and roughly halves by 16k ($\rightarrow$ 3.6), so the gap widens with context: at 16k `Mamba` nearly triples and `Hybrid` more than doubles `Attn` (10.2 and 9.1 vs. 3.6), just as a position-agnostic recurrence that needs no length extrapolation predicts.

5.3 Quality parity: efficiency at no cost

The efficiency and long-context gains cost essentially nothing in quality. The three models sit within $\sim$0.03 nats on validation NLL, with `Hybrid` best (Table 1), and on an eight-task downstream suite scored by the block-diffusion likelihood harness (Table 4) `Attn` and `Hybrid` are level (macro 0.434 vs. 0.432) while `Mamba` trails by about a point. Thus the hybrid delivers its 8–16$\times$ length generalization and steeply reduced decode memory at no measured quality cost, and the pure-SSM `Mamba` gives up only $\sim$1 downstream point for fully constant-memory, length-independent inference.

Quality and throughput trade on a single dial. The per-block denoising budget S trades quality for speed as shown in Table 5. For all three backbones, raising S from 4 to 32 *monotonically* lowers generative perplexity (15.3 $\rightarrow$ 6.4 for `Attn`, 17.1 $\rightarrow$ 6.5 for `Hybrid`, 18.5 $\rightarrow$ 6.5 for `Mamba`) and broadly improves MAUVE, at 5–6$\times$ lower throughput, so a deployment can choose its operating point by turning one knob. One caveat: the absolute MAUVE values are low and noisy (they peak near S=16 rather than rising strictly), because these are small *base* models producing short continuations, so Gen-PPL is the cleaner quality signal here.

5.4 The gains are architectural, not parameter count

A natural worry is that Mamba's extra projection parameters, rather than its linear-time mixing, drive the results. Table 6 shows the advantage is a property of the *architecture*, not the parameter count.

Table 6: **More parameters, but the compute win is long-context.** Exact parameters and analytic forward FLOPs/token for the 3B models (Section 5.4). `Mamba` and `Hybrid` carry 11–13% *more* parameters than `Attn`, but these live in L-independent $\mathcal{O}(d^2)$ projections that add no long-context cost: per-token FLOPs are comparable at short context, while only the SSM cost stays flat with length (shaded), so at L=64k `Mamba` spends $0.26\times$ the attention FLOPs while `Attn`'s $\mathcal{O}(Ld)$ term dominates.

Model	Params	FLOPs/tok (L=1024)	FLOPs/tok (L=64k)
`Attn`	3.033 B	5.712 G	24.209 G
`Hybrid`	3.360 B (+11%)	6.139 G	9.442 G
`Mamba`	3.431 B (+13%)	6.232 G	6.232 G

`Mamba` and `Hybrid` do carry 13% and 11% *more* parameters than `Attn`, but those parameters live in $\mathcal{O}(d^2)$ projections that are independent of L and add no long-context cost: their forward FLOPs/token stay flat with context (`Mamba` at 6.2 G for *every* length), whereas attention's parameter-free $\mathcal{O}(Ld)$ term grows to 24.2 G. The three are comparable at the 1024 training length, then diverge sharply: at L=64k `Mamba` and `Hybrid` spend just $0.26\times$ and $0.39\times$ the attention FLOPs. With quality already at parity (Section 5.3), the long-context win rests on the linear-time mixer, not on the parameter budget: `Mamba` and `Hybrid` win decisively at long context.

We calculate forward-pass FLOPs per token *analytically* from the architecture (two FLOPs per multiply–accumulate), summing every layer's mixer and gated FFN plus the untied output head over the vocabulary; kernels are not profiled. Per token, an attention layer costs $8d^2$ for the Q, K, V, O projections plus $4Ld$ for the score and value-aggregation matmuls, the *only* L-dependent term. A bidirectional Mamba-2 layer costs $2\big[\,2d(2d_{\text{in}}{+}2d_{\text{state}}{+}n_h) + 2d_{\text{in}}d + 2d_{\text{in}}d_{\text{state}} + 2d_{\text{conv}}(d_{\text{in}}{+}2d_{\text{state}})\,\big]$ with $d_{\text{in}}{=}d$ and n_h Mamba heads (in/out projections, the SSD scan, and the depthwise convolution, doubled for the two directions), all independent of L; the output head adds $2dV$. Unlike the smaller-scale DiffuMamba hybrids [32], the 3B Mamba/hybrid variants keep the *same* MLP as attention, so their extra mixer parameters are not offset. Table 6 evaluates this forward count for the 3B models (d=2560, 28 layers, hybrid = 5 attention + 23 Mamba, gated FFN with hidden size 7680, d_{state}=64, expand 1, d_{conv}=4, and an untied vocabulary of V=126 464) at L=1024 and L=64k; parameter counts are read exactly from the trained checkpoints.

6 Conclusion

We pretrained attention, bidirectional-Mamba, and hybrid block-diffusion denoisers at 3B parameters and 300B tokens under one block-causal frontier objective, and decoded all three through a single, *exact* cached interface whose state-space variant is $\mathcal{O}(1)$ in sequence length. Concurrent small-scale work [7] established that such a cache is possible; our results show what it delivers at scale. At 256k tokens `Mamba` decodes at a flat 6.8 ms/step and 7.5 GB where `Attn` needs 29 ms/step and 82 GB, and because that per-stream footprint never grows it scales with batch to $14\times$ the aggregate throughput. The same linear-state bias makes decoding length-robust: `Mamba` and `Hybrid` retrieve needles and answer LongBench queries at 8–16$\times$ their training length while `Attn`'s retrieval collapses at $2\times$, and the hybrid matches `Attn` on likelihood and downstream accuracy, so these gains come at no measured quality cost.

Limitations and future work. Our models are trained at a 1024-token context, so the long-context evaluations probe *extrapolation* rather than trained long-context ability, which explains the modest absolute accuracies far past training length; closing this gap (via RoPE-scaling recipes such as LongLLaDA/UltraLLaDA [17, 14], or simply training at longer contexts) is orthogonal to, and compatible with, our cache. Likewise, we train with a single-frontier objective at a 1024-token context, whereas Chaturvedi et al. [7] use an all-block objective at 8k tokens; disentangling the effect of objective and training length on cached long-context behavior is a natural ablation we leave to future work. Natural next steps are to combine our exact cache with confidence-aware parallel decoding [39] inside the cached generator and to push block-cached hybrids to larger scales. We believe constant-memory, length-generalizing block decoding is a promising foundation for efficient long-context diffusion language models.

References

[1] J. Achiam, S. Adler, S. Agarwal, L. Ahmad, I. Akkaya, F. L. Aleman, D. Almeida, J. Altenschmidt, S. Altman, S. Anadkat, et al. Gpt-4 technical report. *arXiv preprint arXiv:2303.08774*, 2023.

[2] M. Arriola, A. Gokaslan, J. Chiu, Z. Yang, Z. Qi, J. Han, S. Sahoo, and V. Kuleshov. Block diffusion: Interpolating between autoregressive and diffusion language models. In *International Conference on Learning Representations*, volume 2025, pages 50726–50753, 2025.

[3] J. Austin, D. D. Johnson, J. Ho, D. Tarlow, and R. Van Den Berg. Structured denoising diffusion models in discrete state-spaces. *Advances in neural information processing systems*, 34:17981–17993, 2021.

[4] Y. Bai, X. Lv, J. Zhang, H. Lyu, J. Tang, Z. Huang, Z. Du, X. Liu, A. Zeng, L. Hou, Y. Dong, J. Tang, and J. Li. LongBench: A bilingual, multitask benchmark for long context understanding. In *Annual Meeting of the Association for Computational Linguistics (ACL)*, 2024.

[5] T. Brown, B. Mann, N. Ryder, M. Subbiah, J. D. Kaplan, P. Dhariwal, A. Neelakantan, P. Shyam, G. Sastry, A. Askell, et al. Language models are few-shot learners. *Advances in neural information processing systems*, 33:1877–1901, 2020.

[6] A. Campbell, J. Benton, V. De Bortoli, T. Rainforth, G. Deligiannidis, and A. Doucet. A continuous time framework for discrete denoising models. *Advances in Neural Information Processing Systems*, 35: 28266–28279, 2022.

[7] P. Chaturvedi, P. Shroff, T. Suresh, H. Kang, and K. Wen. Training hybrid block diffusion language models with partial bidirectionality. *arXiv preprint arXiv:2607.02805*, 2026.

[8] A. Chowdhery, S. Narang, J. Devlin, M. Bosma, G. Mishra, A. Roberts, P. Barham, H. W. Chung, C. Sutton, S. Gehrmann, et al. Palm: Scaling language modeling with pathways. *Journal of machine learning research*, 24(240):1–113, 2023.

[9] T. Dao and A. Gu. Transformers are SSMs: Generalized models and efficient algorithms through structured state space duality. In *Forty-first International Conference on Machine Learning*, 2024. URL `https://openreview.net/forum?id=ztn8FCR1td`.

[10] S. De, S. L. Smith, A. Fernando, A. Botev, G. Cristian-Muraru, A. Gu, R. Haroun, L. Berrada, Y. Chen, S. Srinivasan, et al. Griffin: Mixing gated linear recurrences with local attention for efficient language models. *arXiv preprint arXiv:2402.19427*, 2024.

[11] D. Y. Fu, T. Dao, K. K. Saab, A. W. Thomas, A. Rudra, and C. Re. Hungry hungry hippos: Towards language modeling with state space models. In *The Eleventh International Conference on Learning Representations*, 2023. URL `https://openreview.net/forum?id=COZDy0WYGg`.

[12] A. Gu and T. Dao. Mamba: Linear-time sequence modeling with selective state spaces. In *First Conference on Language Modeling*, 2024. URL `https://openreview.net/forum?id=tEYskw1VY2`.

[13] A. Gu, K. Goel, and C. Re. Efficiently modeling long sequences with structured state spaces. In *International Conference on Learning Representations*, 2022. URL `https://openreview.net/forum?id=uYLFoz1vlAC`.

[14] G. He, S. Nie, F. Zhu, Y. Zhao, T. Bai, R. Yan, J. Fu, C. Li, and B. Yuan. Ultrallada: Scaling the context length to 128k for diffusion large language models. *arXiv preprint arXiv:2510.10481*, 2025.

[15] C.-P. Hsieh, S. Sun, S. Kriman, S. Acharya, D. Rekesh, F. Jia, Y. Zhang, and B. Ginsburg. Ruler: What's the real context size of your long-context language models? *arXiv preprint arXiv:2404.06654*, 2024. COLM 2024.

[16] O. Lieber, B. Lenz, H. Bata, G. Cohen, J. Osin, I. Dalmedigos, E. Safahi, S. Meirom, Y. Belinkov, S. Shalev-Shwartz, et al. Jamba: A hybrid transformer-mamba language model. *arXiv preprint arXiv:2403.19887*, 2024.

[17] X. Liu, Y. Song, Z. Liu, Z. Huang, Q. Guo, Z. He, and X. Qiu. Longllada: Unlocking long context capabilities in diffusion llms. *arXiv preprint arXiv:2506.14429*, 2025.

[18] Z. Liu, Y. Yang, Y. Zhang, J. Chen, C. Zou, Q. Wei, S. Wang, Y. Zhu, and L. Zhang. dllm-cache: Accelerating diffusion large language models with adaptive caching. *arXiv preprint arXiv:2506.06295*, 2025.

[19] L. Long, Y. Huang, S. Bai, R. Gong, J. Zhang, A. Zhou, and J. Yang. Focus-dllm: Accelerating long-context diffusion llm inference via confidence-guided context focusing. *arXiv preprint arXiv:2602.02159*, 2026.

[20] A. Lou, C. Meng, and S. Ermon. Discrete diffusion modeling by estimating the ratios of the data distribution. In *Forty-first International Conference on Machine Learning*, 2024. URL `https://openreview.net/forum?id=CNicRIVIPA`.

[21] X. Ma, R. Yu, G. Fang, and X. Wang. dkv-cache: The cache for diffusion language models. *Advances in Neural Information Processing Systems*, 38:149009–149033, 2025.

[22] Q. Nguyen-Tri, M. Ranjan, and Z. Shen. Attention is all you need for kv cache in diffusion llms. *arXiv preprint arXiv:2510.14973*, 2025.

[23] J. Ni, Q. Liu, L. Dou, C. Du, Z. Wang, H. Yan, T. Pang, and M. Q. Shieh. Diffusion language models are super data learners. *arXiv preprint arXiv:2511.03276*, 2025.

[24] S. Nie, F. Zhu, Z. You, X. Zhang, J. Ou, J. Hu, J. Zhou, Y. Lin, J.-R. Wen, and C. Li. Large language diffusion models. *Advances in Neural Information Processing Systems*, 38:50608–50646, 2025.

[25] B. Peng, J. Quesnelle, H. Fan, and E. Shippole. YaRN: Efficient context window extension of large language models. In *International Conference on Learning Representations (ICLR)*, 2024.

[26] K. Pillutla, S. Swayamdipta, R. Zellers, J. Thickstun, S. Welleck, Y. Choi, and Z. Harchaoui. MAUVE: Measuring the gap between neural text and human text using divergence frontiers. In *Advances in Neural Information Processing Systems*, 2021.

[27] M. Poli, S. Massaroli, E. Nguyen, D. Y. Fu, T. Dao, S. Baccus, Y. Bengio, S. Ermon, and C. Ré. Hyena hierarchy: Towards larger convolutional language models. In *International Conference on Machine Learning*, pages 28043–28078. PMLR, 2023.

[28] L. Ren, Y. Liu, Y. Lu, Y. Shen, C. Liang, and W. Chen. Samba: Simple hybrid state space models for efficient unlimited context language modeling. In *International Conference on Learning Representations*, 2025.

[29] S. S. Sahoo, M. Arriola, Y. Schiff, A. Gokaslan, E. Marroquin, J. T. Chiu, A. Rush, and V. Kuleshov. Simple and effective masked diffusion language models. *Advances in Neural Information Processing Systems*, 37:130136–130184, 2024.

[30] S. S. Sahoo, J. Deschenaux, A. Gokaslan, G. Wang, J. T. Chiu, and V. Kuleshov. The diffusion duality. In *Forty-second International Conference on Machine Learning*, 2025. URL `https://openreview.net/forum?id=9P9Y8FOSOk`.

[31] J. Shi, K. Han, Z. Wang, A. Doucet, and M. Titsias. Simplified and generalized masked diffusion for discrete data. In A. Globerson, L. Mackey, D. Belgrave, A. Fan, U. Paquet, J. Tomczak, and C. Zhang, editors, *Advances in Neural Information Processing Systems*, volume 37, pages 103131–103167. Curran Associates, Inc., 2024. doi: 10.52202/079017-3277.

[32] V. Singh, O. Ostapenko, P.-A. Noël, E. Belilovsky, and T. Scholak. Diffumamba: High-throughput diffusion lms with mamba backbone. In *International Conference on Machine Learning*, 2026.

[33] D. Su, K. Kong, Y. Lin, J. Jennings, B. Norick, M. Kliegl, M. Patwary, M. Shoeybi, and B. Catanzaro. Nemotron-CC: Transforming Common Crawl into a refined long-horizon pretraining dataset. *arXiv preprint arXiv:2412.02595*, 2024. ACL 2025.

[34] H. Touvron, T. Lavril, G. Izacard, X. Martinet, M.-A. Lachaux, T. Lacroix, B. Rozière, N. Goyal, E. Hambro, F. Azhar, et al. Llama: Open and efficient foundation language models. *arXiv preprint arXiv:2302.13971*, 2023.

[35] R. Waleffe, W. Byeon, D. Riach, B. Norick, V. Korthikanti, T. Dao, A. Gu, A. Hatamizadeh, S. Singh, D. Narayanan, G. Kulshreshtha, V. Singh, J. Casper, J. Kautz, M. Shoeybi, and B. Catanzaro. An empirical study of mamba-based language models. *arXiv preprint arXiv:2406.07887*, 2024.

[36] D. Wang, R.-J. Zhu, S. Abreu, Y. Shan, T. Kergan, Y. Pan, Y. Chou, Z. Li, G. Zhang, W. Huang, et al. A systematic analysis of hybrid linear attention. *arXiv preprint arXiv:2507.06457*, 2025.

[37] X. Wang, C. Xu, Y. Jin, J. Jin, H. Zhang, and Z. Deng. Diffusion llms can do faster-than-ar inference via discrete diffusion forcing. *arXiv preprint arXiv:2508.09192*, 2025.

[38] C. Wu, H. Zhang, S. Xue, S. Diao, Y. Fu, Z. Liu, P. Molchanov, P. Luo, S. Han, and E. Xie. Fast-dllm v2: Efficient block-diffusion LLM. *arXiv preprint arXiv:2509.26328*, 2025.

[39] C. Wu, H. Zhang, S. Xue, Z. Liu, S. Diao, L. Zhu, P. Luo, S. Han, and E. Xie. Fast-dLLM: Training-free acceleration of diffusion LLM by enabling KV cache and parallel decoding. In *International Conference on Learning Representations (ICLR)*, 2026.

[40] J. Xiong, Q. Han, S. Gong, Y. Hsieh, C. Wu, C. Tao, C. Zhao, and N. Wong. Prefilling-dllm: Predictive prefilling for long-context inference in diffusion language models. *arXiv preprint arXiv:2606.10537*, 2026.

[41] J. Ye, Z. Xie, L. Zheng, J. Gao, Z. Wu, X. Jiang, Z. Li, and L. Kong. Dream 7b: Diffusion large language models. *arXiv preprint arXiv:2508.15487*, 2025.

Table 7: Full training and model hyperparameters, shared across `Attn`, `Hybrid`, and `Mamba` (the sequence mixer is the only difference; Table 1).

Hyperparameter	**Value**
Architecture	
Model dimension d_{model}	2560
Layers	28
Attention heads (= KV heads)	20
Head dimension	128
MLP hidden size	7680
Block size G	32
RoPE θ	5×10^5
Vocabulary (incl. mask)	126 464
Mixer (`Attn`/`Hybrid`/`Mamba`)	28 attn / 5 attn + 23 Mamba-2 / 28 Mamba-2
Data	
Corpus	Nemotron-CC [33]
Tokenizer	LLaDA tokenizer [24]
Sequence packing	packed, no padding
Objective and optimization	
Training objective	single-frontier block diffusion
Loss weighting	uniform
Optimizer	AdamW (β_1=0.9, β_2=0.999, ϵ=10^{-8})
Peak learning rate	1×10^{-4}
LR schedule	cosine decay
Warmup	5% of steps
Weight decay	0.1
Gradient-norm clip	1.0
Precision	`bf16`
Batching and token budget	
Sequence length (training context)	1024
Per-device batch	16
Global batch	4096 sequences
Tokens per step	$1024 \times 4096 \approx 4.2$M
Training steps	71 525
Total tokens	≈300B
Systems and checkpointing	
Parallelism	FSDP
Attention kernel	PyTorch SDPA
Gradient checkpointing	off
`torch.compile`	off
Evaluation interval	every 100 steps ($\leq$8192 samples)
Checkpoint interval	every 50 steps
Model selection	best validation NLL

A Training and model hyperparameters

Table 7 lists the full training and architecture configuration. The three denoisers are identical except for the sequence mixer (Table 1); every other setting is shared.

B Per-depth needle-in-a-haystack

Table 8 reports the retrieval accuracy behind Figure 3 by needle depth (0 = far from the end-of-sequence query, 1.0 = adjacent) at the two lengths just past training length. All models show the recency/sliding-window effect, but only the linear-state backbones retain any retrieval at $4\times$.

Table 8: **The linear-state advantage is recency.** Per-depth NIAH retrieval (%) at L=2k (2×) and L=4k (4×) (3B; depth 0 = oldest, 1.0 = adjacent to the query). Every backbone peaks on *recent* needles, but only `Mamba`/`Hybrid` keep retrieving older ones past training length; `Attn` is near-zero at all but the last depth.

L	Model	depth 0.0	0.25	0.5	0.75	1.0
2k	`Attn`	1	1	1	5	53
	`Hybrid`	19	34	15	100	100
	`Mamba`	26	67	86	100	99
4k	`Attn`	0	0	0	0	9
	`Hybrid`	2	7	7	73	100
	`Mamba`	6	4	5	49	98

C Full batch-size efficiency sweep

Figure 2 plots batch 1 (exact numbers in Table 9); Figure 4 gives the full sweep over batch sizes $1/2/4/8$. `Mamba` throughput *scales with batch and stays flat in length* (1593 tok/s at batch 8 for *every* length to 256k, $\sim$5.4× the batch-1 rate, at a constant $\sim$8 GB), while `Attn`'s $\mathcal{O}(B \cdot L)$ KV-cache exhausts the H100 (`OOM`) at progressively shorter lengths as batch grows (last feasible: 256k@B1, 128k@B2, 64k@B4, 32k@B8). At 256k, `Mamba` at batch 8 delivers 1593 tok/s while `Attn` cannot run even batch 2; its best feasible aggregate is batch 1 at 114 tok/s, the $\sim$14× gap quoted in Section 5.1.

Table 9: **Flat vs. $\mathcal{O}(L)$, in numbers.** Batch-1 per-step latency (ms), peak memory (GB), and end-to-end decode throughput (tok/s, S=16) vs. context length (3B, H100 80 GB, cudagraph), the exact values behind Figure 2. `Mamba` is constant ($\sim$6.8 ms, $\sim$7.5 GB) out to 256k while `Attn` grows to 29 ms and 82 GB; best per length shaded.

	Latency (ms) ↓			Peak mem (GB) ↓			Gen. tput (tok/s) ↑		
L	`Attn`	`Hybrid`	`Mamba`	`Attn`	`Hybrid`	`Mamba`	`Attn`	`Hybrid`	`Mamba`
64	5.55	6.53	6.77	6.46	7.80	7.59	346	305	296
4k	6.12	6.62	6.75	7.69	8.08	7.41	336	303	296
16k	7.28	6.84	6.74	11.24	8.74	7.44	307	299	296
64k	11.79	7.65	6.72	25.40	11.32	7.51	229	282	296
128k	17.70	8.66	6.72	44.26	14.74	7.58	171	263	296
256k	29.31	10.74	6.76	81.91	21.52	7.65	114	231	297

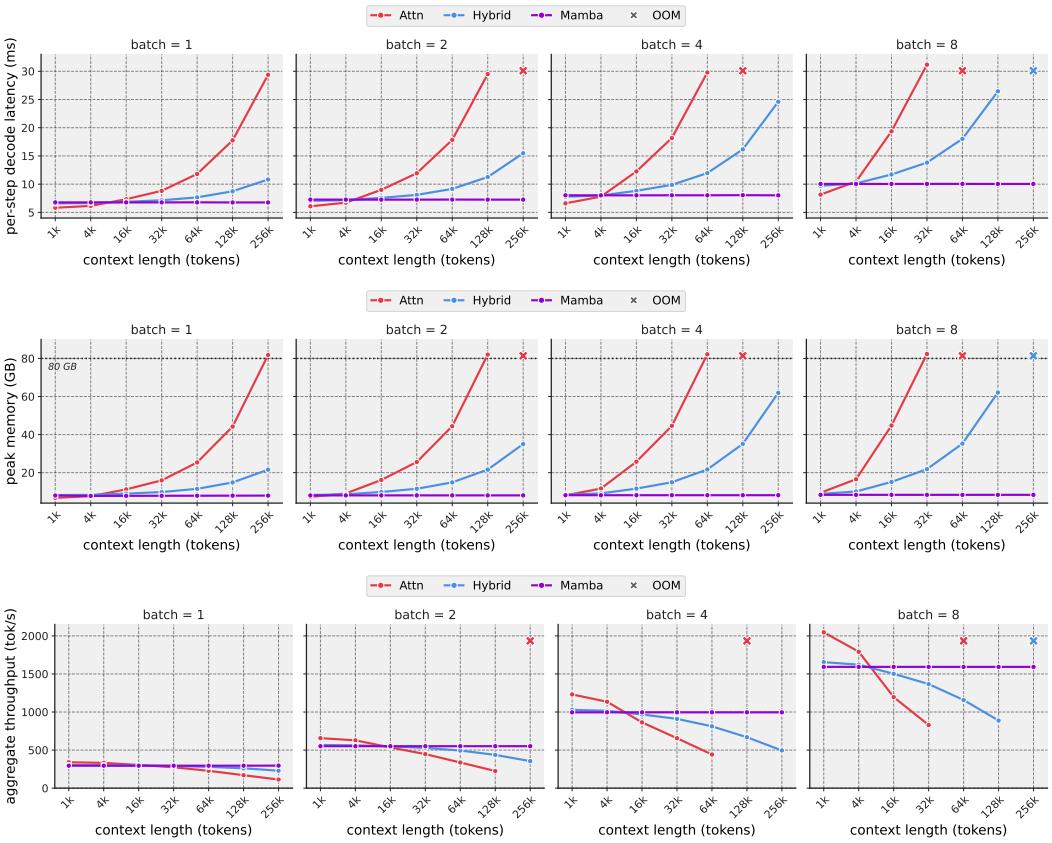


Figure 4: **Efficiency vs. context length across batch sizes (3B, single H100 80 GB, `bf16`, cudagraph).** Top to bottom: per-step decode latency, peak memory, aggregate decode throughput (S=16); within each row the four panels are batch $1/2/4/8$ (left to right). `Mamba` stays $\sim$8 GB at every (batch, length); `Attn`'s last-feasible length shrinks with batch (256k@B1, 128k@B2, 64k@B4, 32k@B8), marked `OOM` ($\times$) beyond.