arXiv:2609.14708v1 [cs.AI] 13 Sep 2026

LIGHTNING WEAVE: IMPROVING THE ACCURACY–EFFICIENCY FRONTIER OF REASONING MODELS THROUGH CAPABILITY COMPOSITION

Yecheng Wu[1], **Song Han**[1,2], **Han Cai**[2]
[1]Massachusetts Institute of Technology [2]NVIDIA
wyc557@mit.edu

ABSTRACT

A core goal of efficient reasoning is to improve the accuracy–efficiency frontier. However, jointly improving reasoning accuracy and inference efficiency can be challenging, as the two objectives can favor different reasoning behaviors. Independently post-trained models already offer distinct strengths in accuracy and efficiency. We introduce Lightning Weave, a post-training framework that extracts and composes these independently learned capabilities in a single student through on-policy distillation. Each acquired capability is represented by the policy shift from the model before post-training to the resulting specialist. Lightning Weave combines aligned log-ratio shifts at shared student token states and uses Tilted-Target DOPD to convert the cached signals into a stable learning target. Each anchor pair scores the cached trajectories once, enabling subsequent student training without serving multiple live anchor models concurrently. Across diverse student models and benchmarks in mathematics and code, Lightning Weave substantially improves upon the base students and achieves a state-of-the-art accuracy–efficiency frontier. On Qwen3.5-4B, it raises HMMT 2025 accuracy from 59.2% to 64.0% with 10.7% fewer response tokens, and LiveCodeBench v5 accuracy from 41.7% to 54.2% with 9.6% fewer response tokens. Adjusting the relative strengths of the anchor signals yields a strong empirical accuracy–efficiency Pareto frontier. These results establish Lightning Weave as a new practical route to efficient reasoning through capability composition. Code will be released soon.

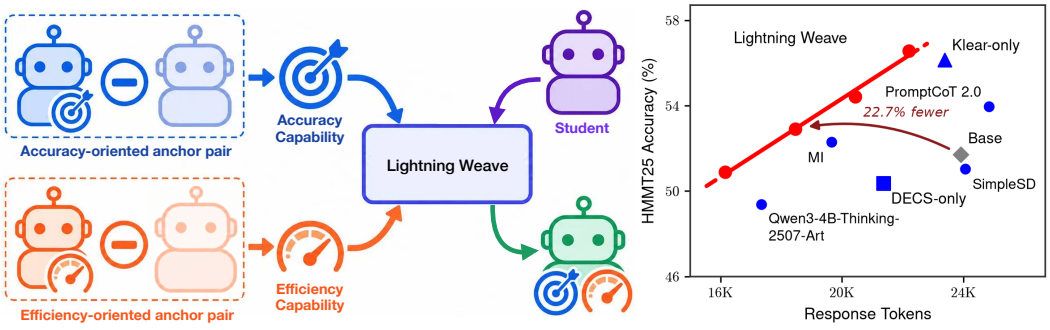


Figure 1: Left: Intuition of Lightning Weave. Accuracy- and efficiency-oriented anchor pairs isolate complementary capabilities acquired through independent post-training. Lightning Weave composes these capabilities into a joint target, transferring both to a single student and thereby improving its accuracy and efficiency simultaneously. Right: On Qwen3-4B-Thinking-2507, varying the relative strengths of the two capabilities yields a family of students that traces an empirical accuracy–efficiency Pareto frontier on HMMT 2025. The resulting frontier compares favorably with the base model, single-anchor policies, and existing efficient-reasoning methods.

1 INTRODUCTION

Large reasoning models have achieved strong performance on complex tasks, but often generate lengthy reasoning traces that incur substantial inference cost. Aggressively shortening these traces can compromise accuracy by curtailing useful exploration. Efficient reasoning therefore aims to improve the accuracy–efficiency frontier, achieving stronger performance for a given inference budget. Existing approaches pursue this goal through length-aware reinforcement learning and fine-tuning (Jiang et al., 2026; Liu et al., 2025; Luo et al., 2026b), training and distillation across reasoning modes (Luo et al., 2026a; Liang et al., 2026; Ruan et al., 2026), and merging deliberate and concise reasoning models in parameter space (Wu et al., 2025; Yao et al., 2025; Lan et al., 2025).

Directly optimizing accuracy and efficiency together can be challenging, as the two objectives can favor different reasoning behaviors and improvements in one may compromise the other. Meanwhile, independently post-trained models already offer distinct strengths in reasoning accuracy (Su et al., 2026) and efficiency (Jiang et al., 2026). This suggests a complementary route to efficient reasoning: extract what these specialists have already learned and compose their capabilities in a single student through policy distillation (Rusu et al., 2016). The challenge is to reconcile their potentially competing effects on accuracy and token use within the same reasoning task. This motivates our central question: *Can capabilities learned through independent post-training be extracted and composed to improve a student's accuracy–efficiency frontier?*

We introduce Lightning Weave, a capability-composition framework built on on-policy distillation (OPD) (Agarwal et al., 2024; Gu et al., 2024). OPD supervises a student on its own generated trajectories using a teacher's token-probability distributions, and recent multi-teacher approaches use this mechanism to integrate specialized capabilities (Ma et al., 2026; Yang et al., 2026b; Chen et al., 2026; Gao et al., 2026). To represent what each specialist has learned, we follow Direct On-Policy Distillation (DOPD) (Feng et al., 2026) and related policy-shift formulations (Yang et al., 2026a; Yu et al., 2026). We pair each specialist with its checkpoint before the relevant post-training stage, forming an *anchor pair*. The log-ratio of their token probabilities represents the behavioral shift acquired during post-training. Lightning Weave aligns these shifts in the student's token space and combines them into one student target, without requiring matching model parameters.

Composing multiple shifts online, however, makes supervision costly: with K anchor pairs, each new student rollout requires scoring by up to $2K$ anchor models. Lightning OPD (Wu et al., 2026c) demonstrates an offline pipeline that caches teacher feedback before student training, suggesting a practical route to offline composition. Yet directly reusing DOPD's sampled-token objective on cached trajectories does not generally preserve the intended stationary target. As the student moves away from the behavior policy that generated the cache, the regularizer estimated from cached actions need not equal the intended KL penalty for the current student. Consequently, even after the student reaches the intended shifted policy, the cached surrogate can still produce a non-zero gradient and push the student away from that solution.

We address this mismatch with Tilted-Target DOPD. Each cached shift tilts the frozen behavior policy into an explicit target distribution, and training minimizes the KL divergence from the current student to this target. For the token-level DOPD surrogate, this construction preserves the expected initial update and makes the loss and gradient vanish when the student matches the target on cached states. The explicit target thus provides corrective feedback as the student changes, giving offline capability transfer a well-defined stationary solution.

Using this objective, Lightning Weave composes the accuracy- and efficiency-oriented shifts at every shared student token state. We first take a weighted sum of the aligned log-ratios and then use it to construct one joint tilted target. Composing shifts before target construction lets all capability sources jointly supervise each student decision. Each anchor pair scores the same cached trajectories once, after which optimization requires only the student and cached scores. Adjusting the relative strengths of the anchor signals yields students with different accuracy–efficiency trade-offs.

We evaluate Lightning Weave across diverse student models in separate mathematics and code training settings, covering five benchmarks. Our primary setting composes the accuracy-oriented shift from Klear (Su et al., 2026) with the efficiency-oriented shift from DECS (Jiang et al., 2026). Across the fully evaluated students, composition improves the overall accuracy–efficiency trade-off over the base and either single-anchor alternative. On Qwen3-4B (Yang et al., 2025), Lightning Weave

raises AIME 2024 (Mathematical Association of America, 2026) accuracy from 72.9% to 76.0% while reducing response tokens by 21.3%. On Qwen3.5-4B (Qwen Team, 2026), it raises HMMT 2025 (Harvard–MIT Mathematics Tournament, 2025) accuracy from 59.2% to 64.0% with 10.7% fewer response tokens, and LiveCodeBench v5 (Jain et al., 2025) accuracy from 41.7% to 54.2% with 9.6% fewer tokens. Adjusting the relative strengths of the anchor signals during training yields a family of students with a strong empirical accuracy–efficiency Pareto frontier. These results support capability composition as a practical route to more accurate and efficient reasoning.

2 Related Work

Efficient Reasoning. Efficient reasoning improves the accuracy–efficiency frontier by controlling inference computation. Existing approaches regulate token budgets and prune low-confidence traces (Han et al., 2025; Fu et al., 2025c), optimize length-aware objectives (Luo et al., 2026b; Aggarwal & Welleck, 2025; Liu et al., 2025; Jiang et al., 2026), compress chain-of-thought traces (Xia et al., 2025), or reason in continuous representations (Hao et al., 2025; Zhang et al., 2025). Others train or distill adaptive and budget-controlled reasoning modes (Luo et al., 2026a; Liang et al., 2026; Ruan et al., 2026), or merge deliberate and concise checkpoints (Wu et al., 2025; Yao et al., 2025; Lan et al., 2025). Systems-oriented approaches include reward-guided and step-level speculation (Liao et al., 2025; Pan et al., 2025; Fu et al., 2025b), certainty-guided allocation and scheduling in Dynasor (Fu et al., 2025a), and KV-cache compression in R-KV and SkipKV (Cai et al., 2025; Tian et al., 2026). These methods target generated tokens, latency, memory, and throughput. Lightning Weave targets the student's accuracy–efficiency frontier through post-training capability composition, complementing inference-time systems optimization.

Capability Composition. Capabilities can be integrated through policy distillation and knowledge amalgamation (Rusu et al., 2016; Parisotto et al., 2016; Teh et al., 2017; You et al., 2017; Shen et al., 2019a;b), heterogeneous output-space fusion (Wan et al., 2024), or parameter-space model merging (Li et al., 2022; Wortsman et al., 2022; Matena & Raffel, 2022; Ilharco et al., 2023; Yadav et al., 2023; Yang et al., 2024a; Yu et al., 2024). Multi-objective alignment studies reward-specialized interpolation and controllable trade-offs (Rame et al., 2023; Yang et al., 2024b; Zhong et al., 2024; Guo et al., 2024), while multi-teacher OPD integrates domain specialists and mitigates capability interference (Ma et al., 2026; Yang et al., 2026b; Chen et al., 2026; Gao et al., 2026). Rather than merging endpoint parameters or directly matching specialist policies, Lightning Weave composes aligned post-training policy shifts at shared student token states. This decouples composition from parameter compatibility while reconciling independently learned accuracy and efficiency capabilities within the same reasoning task.

On-Policy Distillation. OPD provides dense teacher supervision on student-generated trajectories (Gu et al., 2024; Agarwal et al., 2024; Lu & Lab, 2025; Song & Zheng, 2026). Recent work analyzes its failure modes (Li et al., 2026; Fu et al., 2026; Armandpour et al., 2026), refines optimization (Ko et al., 2026; Jin et al., 2026; Zhang et al., 2026b; Wang et al., 2026b), and enables cross-tokenizer transfer (He et al., 2026; Wang et al., 2026a). DOPD and related formulations transfer policy shifts through teacher–reference log-ratios or positive–negative model contrasts (Yang et al., 2026a; Feng et al., 2026; Yu et al., 2026). Lightning OPD caches teacher feedback for offline training, while Lightning OPD 2.0 corrects cross-teacher style bias (Wu et al., 2026c;d). Building on policy-shift supervision and offline caching, Tilted-Target DOPD provides an explicit, stable learning target on cached student states, enabling capability composition without serving multiple live anchor models during student training.

3 Method

We develop Lightning Weave to improve the accuracy–efficiency frontier by composing independently learned capabilities in a single student. As illustrated in Figure 2, we represent each capability as an anchor-pair policy shift, align these shifts at shared student-generated token states, and compose them into a joint learning target. We first review OPD and policy-shift supervision, then introduce Tilted-Target DOPD to provide an explicit, stable target for offline capability transfer, and finally build multi-anchor composition on this foundation.

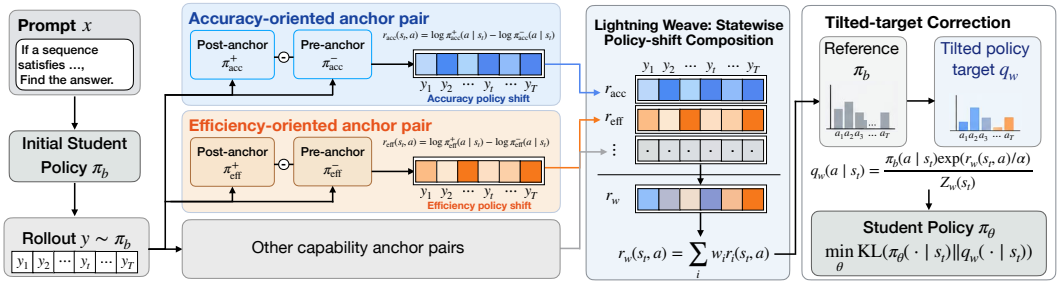


Figure 2: **Overview of Lightning Weave.** (1) **Capability-specific policy shifts.** Given a prompt, the frozen behavior policy generates a rollout whose token states are shared by all independently trained anchor pairs. The log-ratio between each post-trained anchor and its pre-anchor isolates the corresponding capability-specific policy shift. (2) **Statewise multi-anchor composition.** Lightning Weave combines the weighted shifts at every token state, allowing compatible changes to reinforce one another while reconciling competing changes locally. (3) **Tilted-target distillation.** The composed shift exponentially tilts the behavior policy into an explicit target distribution, which the student learns through KL minimization.

3.1 Preliminaries

Let $x \sim \mathcal{D}$ be a prompt, $\hat{y} \sim \pi_\theta(\cdot \mid x)$ a student response, and $s_t = (x, \hat{y}_{<t})$ its token-level state. Given a teacher π_T, standard OPD minimizes the KL to the teacher on student-generated states (Agarwal et al., 2024):

$$\mathcal{L}_{\mathrm{OPD}}(\theta) = \mathbb{E}_{x\sim\mathcal{D},\, \hat{y}\sim\pi_\theta}\left[\sum_t D_{\mathrm{KL}}\big(\pi_\theta(\cdot \mid s_t) \,\|\, \pi_T(\cdot \mid s_t)\big)\right]. \tag{1}$$

Direct On-Policy Distillation (DOPD) (Feng et al., 2026) instead represents a specialist with a post-trained anchor and its pre-anchor, denoted by (π^+, π^-). The sequence-level policy shift decomposes into dense token-level rewards:

$$\Delta(\hat{y} \mid x) = \log \frac{\pi^+(\hat{y} \mid x)}{\pi^-(\hat{y} \mid x)} = \sum_t r_\Delta(\hat{y}_t \mid s_t), \qquad r_\Delta(a \mid s) = \log \frac{\pi^+(a \mid s)}{\pi^-(a \mid s)}. \tag{2}$$

This ratio isolates the behavioral change introduced by post-training rather than the endpoint policy π^+. Let π_b denote the initial student. In its idealized sequence-level form, DOPD maximizes

$$\mathcal{J}_{\mathrm{DOPD}}(\theta) = \mathbb{E}_{x\sim\mathcal{D}}\left[\mathbb{E}_{\hat{y}\sim\pi_\theta(\cdot|x)}[\Delta(\hat{y} \mid x)] - \alpha D_{\mathrm{KL}}\big(\pi_\theta(\cdot \mid x) \,\|\, \pi_b(\cdot \mid x)\big)\right], \tag{3}$$

where $\alpha > 0$ controls the KL penalty. Following DOPD's zero-discount token-level surrogate, we use $r_\Delta(a \mid s)$ as the immediate reward at each visited state.

3.2 Single-Anchor Distillation: Tilted-Target DOPD

Offline DOPD and its limitation. Online DOPD must serve both anchors to evaluate r_Δ on the states visited by the current student. Inspired by offline score caching (Wu et al., 2026c), we instead sample trajectories once from π_b and cache their anchor shifts. Let d_{π_b} denote the resulting token-state distribution. A naive cached surrogate for Eq. 3 is

$$\mathcal{J}_{\mathrm{naive}}(\theta) = \mathbb{E}_{s\sim d_{\pi_b}}\left[\mathbb{E}_{a\sim\pi_\theta(\cdot|s)}[r_\Delta(a \mid s)] - \alpha \widehat{D}^b_{\mathrm{KL}}\big(\pi_\theta(\cdot \mid s) \,\|\, \pi_b(\cdot \mid s)\big)\right], \tag{4}$$

where $\widehat{D}^b_{\mathrm{KL}}$ denotes DOPD's low-variance sampled-token KL estimator evaluated on a cached action $a_b \sim \pi_b(\cdot \mid s)$. In particular, $\widehat{D}^b_{\mathrm{KL}} = \exp(\ell_\theta) - 1 - \ell_\theta$, where $\ell_\theta = \log \pi_b(a_b \mid s) - \log \pi_\theta(a_b \mid s)$. At initialization, the cached states and actions are on-policy, so Eq. 4 matches the online DOPD update. As π_θ departs from π_b, however, cached actions no longer yield an on-policy estimate of the KL regularizer. The regularization is therefore not guaranteed to cancel the fixed policy-shift update at the intended solution, allowing training to continue pushing after the shift has been absorbed. The cached states remain an offline approximation; our correction instead restores a well-defined fixed point on these states.

Tilted-Target DOPD. We make the destination of the regularized update explicit. Using the full-distribution form, each cached state $s \sim d_{\pi_b}$ defines

$$q(\cdot \mid s) = \arg\max_{\pi} \left\{ \mathbb{E}_{a\sim\pi(\cdot|s)}[r_\Delta(a \mid s)] - \alpha D_{\mathrm{KL}}\big(\pi(\cdot \mid s) \,\|\, \pi_b(\cdot \mid s)\big) \right\},$$

$$q(a \mid s) = \frac{\pi_b(a \mid s)\exp(r_\Delta(a \mid s)/\alpha)}{Z(s)}. \tag{5}$$

Here $Z(s) = \sum_a \pi_b(a \mid s)\exp(r_\Delta(a \mid s)/\alpha)$ normalizes the distribution over actions. A larger α keeps q closer to π_b, while a smaller α applies a stronger anchor shift. We then use the same student-to-target KL form as OPD, evaluated on the cached states:

$$\mathcal{L}_{\mathrm{TT}}(\theta) = \alpha\, \mathbb{E}_{s\sim d_{\pi_b}}\left[D_{\mathrm{KL}}\big(\pi_\theta(\cdot \mid s) \,\|\, q(\cdot \mid s)\big)\right]. \tag{6}$$

Substituting Eq. 5 gives

$$\alpha D_{\mathrm{KL}}(\pi_\theta \,\|\, q) = \alpha D_{\mathrm{KL}}(\pi_\theta \,\|\, \pi_b) - \mathbb{E}_{a\sim\pi_\theta}[r_\Delta(a \mid s)] + \alpha \log Z(s). \tag{7}$$

Because $\log Z(s)$ is independent of θ, Eq. 6 is equivalent to the full-distribution, KL-regularized DOPD objective on each cached state. It preserves the expected per-state online update at initialization and, unlike the naive surrogate, has an explicit fixed point: the loss and gradient vanish when $\pi_\theta = q$. Repeated optimization therefore approaches a well-defined policy target rather than continually extrapolating the cached shift. This self-correcting behavior stabilizes offline training.

3.3 Multi-Anchor Distillation: Lightning Weave

Aligned policy-shift composition. Having established stable transfer from one anchor pair, we now seek a single student target that realizes the changes acquired by K independently trained specialists. The i-th pair (π_i^+, π_i^-) induces the token-level shift $r_i(a \mid s) = \log \frac{\pi_i^+(a|s)}{\pi_i^-(a|s)}$. We evaluate every pair on the same states cached from π_b and express its scores over a common student action space. At each student decision, the resulting $\{r_i(a \mid s)\}_{i=1}^K$ therefore describe how different post-training procedures reweight the same action distribution. Because these changes are expressed as log-density ratios, their weighted composition is

$$r_{\mathbf{w}}(a \mid s) = \sum_{i=1}^K w_i r_i(a \mid s) = \log \prod_{i=1}^K \left(\frac{\pi_i^+(a \mid s)}{\pi_i^-(a \mid s)} \right)^{w_i}, \tag{8}$$

where $\mathbf{w} = (w_1, \ldots, w_K)$ contains non-negative capability weights that satisfy $\sum_{i=1}^K w_i = 1$. Their values determine the balance among capabilities, and we use $w_i = 1/K$ for equal composition. With the same α and optimization configuration, setting one weight to one and all others to zero exactly recovers the corresponding single-anchor objective.

Lightning Weave. We apply the composed shift once to the common behavior policy, defining

$$q_{\mathbf{w}}(\cdot \mid s) = \arg\max_{\pi} \left\{ \mathbb{E}_{a\sim\pi(\cdot|s)}[r_{\mathbf{w}}(a \mid s)] - \alpha D_{\mathrm{KL}}\big(\pi(\cdot \mid s) \,\|\, \pi_b(\cdot \mid s)\big) \right\}. \tag{9}$$

The objective is strictly concave in π and has the unique solution

$$q_{\mathbf{w}}(a \mid s) = \frac{\pi_b(a \mid s)}{Z_{\mathbf{w}}(s)} \exp\left(\frac{1}{\alpha} \sum_{i=1}^K w_i r_i(a \mid s) \right) = \frac{\pi_b(a \mid s)}{Z_{\mathbf{w}}(s)} \prod_{i=1}^K \left(\frac{\pi_i^+(a \mid s)}{\pi_i^-(a \mid s)} \right)^{w_i/\alpha}. \tag{10}$$

Here $Z_{\mathbf{w}}(s) = \sum_a \pi_b(a \mid s)\exp(r_{\mathbf{w}}(a \mid s)/\alpha)$ normalizes $q_{\mathbf{w}}$ over the common student action space. Equation 10 is a product of relative policy changes around one shared student prior, not an arithmetic mixture of teacher distributions. Anchor pairs that support the same action reinforce one another, while conflicting changes are reconciled locally through their weighted ratios. In the sample-mixing baseline, each example is supervised by only one anchor-specific target, leaving their interaction implicit in shared model parameters; our construction specifies that interaction directly at every aligned token state. We then fit the student to this joint target using

$$\mathcal{L}_{\mathrm{joint}}(\theta; \mathbf{w}) = \alpha\, \mathbb{E}_{s\sim d_{\pi_b}}\left[D_{\mathrm{KL}}\big(\pi_\theta(\cdot \mid s) \,\|\, q_{\mathbf{w}}(\cdot \mid s)\big)\right]. \tag{11}$$

Expanding this KL shows that, up to a θ-independent constant, the objective combines the weighted DOPD directions under a single KL constraint, while its loss and gradient vanish at $q_{\mathbf{w}}$. Equation 11 recovers Tilted-Target DOPD when $K = 1$. Each anchor pair is scored only once; after the aligned shifts are cached, training serves only the student regardless of the number of anchors. Complete derivations are provided in Appendix A, and practical finite-target approximation and cross-tokenizer alignment are described in Appendix B.4.

4 EXPERIMENTS

Table 1: Main accuracy–efficiency results across mathematics and code. We report accuracy (Acc.; %) and mean response tokens (#Tok.) for each benchmark, together with average accuracy, response tokens, and AES over all five benchmarks. All Lightning Weave rows compose the Klear and DECS policy shifts. Within each student block, the best value for each metric is marked in **bold** and the second-best is underlined.

Policy	AIME 2024		AIME 2025		HMMT 2025		LCB v5		LCB v6		Average		
	Acc.↑	#Tok.↓	Acc.↑	#Tok.↓	Acc.↑	#Tok.↓	Acc.↑	#Tok.↓	Acc.↑	#Tok.↓	Acc.↑	#Tok.↓	AES↑
Qwen3-1.7B													
Base	45.8	17,564	40.4	17,537	21.7	17,570	35.1	14,796	30.3	14,409	34.66	16,375	0.00
Klear-only	53.2	18,457	**41.7**	19,178	**24.1**	19,751	**38.3**	15,131	31.9	15,198	37.84	17,543	0.20
DECS-only	46.2	**14,558**	34.9	**14,534**	20.9	**14,160**	33.1	**13,406**	30.5	**13,039**	33.12	**13,939**	−0.08
Lightning Weave	**55.1**	15,289	40.8	16,151	22.9	15,855	38.1	14,284	**32.8**	13,680	**37.94**	15,052	**0.34**
Qwen3-4B													
Base	72.9	14,641	65.4	17,844	41.4	17,626	53.0	13,843	46.8	14,663	55.90	15,723	0.00
Klear-only	75.8	15,061	**71.3**	17,715	**45.6**	18,230	57.4	13,252	49.6	13,776	**59.94**	15,607	0.23
DECS-only	68.3	**10,918**	60.6	**12,429**	35.0	**11,862**	53.0	12,531	46.2	13,437	52.62	**12,235**	−0.09
Lightning Weave	**76.0**	11,521	70.1	13,816	43.0	13,743	**59.2**	**11,702**	**51.3**	**12,357**	59.92	12,628	**0.41**
Qwen3-4B-Thinking-2507													
Base	77.9	19,442	73.9	21,170	51.7	23,906	65.5	16,693	53.4	18,105	64.47	19,863	0.00
Klear-only	83.0	18,128	78.5	19,792	**56.1**	23,377	66.4	17,853	**56.7**	19,487	68.16	19,727	0.18
DECS-only	79.0	17,680	75.5	19,460	50.4	21,369	63.9	**16,004**	53.2	**17,390**	64.40	18,381	0.04
Lightning Weave	**85.3**	**16,003**	**80.4**	**17,970**	54.4	**20,440**	**68.1**	17,216	56.5	18,790	**68.94**	**18,084**	**0.28**
Qwen3.5-4B													
Base	72.9	18,316	63.5	20,322	59.2	26,481	41.7	31,287	38.5	30,789	55.16	25,439	0.00
Klear-only	78.2	21,522	66.7	23,346	56.7	27,096	51.2	29,891	46.8	29,638	59.92	26,299	0.25
DECS-only	64.2	**15,052**	55.8	**17,335**	52.1	**22,228**	52.4	**26,549**	45.8	**27,091**	54.06	**21,651**	0.06
Lightning Weave	**84.2**	18,900	**74.6**	20,758	**64.0**	23,635	**54.2**	28,294	**47.3**	28,841	**64.86**	24,086	**0.61**
OLMo-3-7B-Think													
Base	73.5	17,521	65.3	19,247	44.4	20,960	52.1	22,377	46.6	22,679	56.38	20,557	0.00
Klear-only	77.6	16,787	**72.3**	18,553	**50.3**	23,976	55.0	23,794	47.5	24,677	**60.54**	21,557	0.18
DECS-only	70.1	13,497	61.9	**14,528**	39.2	**16,076**	52.2	**20,857**	47.7	**21,673**	54.22	**17,326**	−0.04
Lightning Weave	**77.9**	**13,196**	69.2	14,545	46.1	16,487	**58.0**	22,404	**49.4**	22,873	60.12	17,901	**0.34**

4.1 EXPERIMENTAL SETUP

Models and anchor pairs. We conduct experiments on five student models: Qwen3-1.7B, Qwen3-4B, Qwen3-4B-Thinking-2507 (Yang et al., 2025), Qwen3.5-4B (Qwen Team, 2026), and OLMo-3-7B-Think (Team Olmo et al., 2026), spanning multiple model sizes and families. We represent each capability using the shift from a pre-anchor to its post-trained counterpart. Our accuracy-oriented anchor pair is Qwen3-8B-Base → Klear-Reasoner-8B (Klear) (Su et al., 2026), and our efficiency-oriented anchor pair is DeepSeek-R1-Distill-Qwen-1.5B → DECS-1.5B (DECS) (Jiang et al., 2026). We evaluate both single-anchor shifts and their Klear–DECS composition for every student. Section 4.4 further extends this study to MiMo-RL as an additional anchor.

Training data. For mathematics, we sample 3,200 prompts from the math split of Skywork-OR1-RL-Data (He et al., 2025), converted to the DAPO prompt format (Yu et al., 2025). For code, we sample 3,200 prompts from KlearReasoner-CodeSub-15K (Su et al., 2026) after length filtering and prompt deduplication. Each student independently generates four responses per prompt, with a maximum response length of 2,048 tokens. All anchor pairs score the same student trajectories. When an anchor and student use different tokenizers, we project the anchor scores into the student token space through cross-tokenizer alignment; implementation details are provided in Appendix B.4.

Benchmarks and metrics. We evaluate mathematical reasoning on AIME 2024, AIME 2025 (Mathematical Association of America, 2026), and HMMT February 2025 (Harvard–MIT Mathematics Tournament, 2025), and code generation on LiveCodeBench (LCB) v5 and v6 (Jain et al., 2025). For each math problem, we sample 64 responses at temperature 0.6 and top-$p = 0.95$, with a maximum of 32,768 generated tokens, and report mean answer accuracy over all samples. For each LiveCodeBench problem, we similarly sample four responses at temperature 0.6 and top-$p = 0.95$, with a 40,960-token limit, and report their mean accuracy (Avg@4). Alongside accuracy, we report the mean number of generated response tokens as a measure of inference efficiency. We

also report the Accuracy–Efficiency Score (AES) (Luo et al., 2026b), computed against the corresponding base model per benchmark and then averaged equally across all five benchmarks.

Training settings. We optimize over the cached trajectories using Adam with a global batch size of 64 and a constant learning rate of 1.0×10^{-6}. We use $\alpha = 2.0$ for both single- and multi-anchor training. Multi-anchor weights are normalized to sum to one; equal two-anchor composition assigns a weight of 0.5 to each anchor. Additional hyperparameters are provided in Appendix B.2.

4.2 Main Results

Table 1 reports evaluation results for five student models across five math and code benchmarks. Compared with both the base models and single-anchor policies, Lightning Weave consistently improves the balance between accuracy and efficiency across model sizes and families. On Qwen3-4B, it improves average accuracy over the base model by 4.02 points while reducing response tokens by 19.7%. On Qwen3-4B-Thinking-2507, Lightning Weave improves average accuracy by 4.5 points while reducing response tokens by 9.0%, outperforming both single-anchor policies in both aggregate metrics. On Qwen3.5-4B, Lightning Weave yields a substantially larger accuracy gain of 9.70 points while still reducing response tokens by 5.3%. In particular, its HMMT 2025 accuracy increases from 59.2% to 64.0%, reaching a level competitive with state-of-the-art models of a similar scale while using 10.7% fewer tokens. Figure 3(a) further shows that Lightning Weave achieves the highest AES and accuracy on all five benchmarks for Qwen3.5-4B. The gains also transfer to OLMo-3-7B-Think, where Lightning Weave improves average accuracy by 3.74 points and reduces response tokens by 12.9%. Across all five backbones, Lightning Weave achieves the highest AES, substantially outperforming both single-anchor policies and delivering a consistently stronger accuracy–efficiency trade-off. Together, these results establish capability composition as a consistent route to improving the accuracy–efficiency frontier across model scales and families.


4.3 Accuracy–Efficiency Frontiers

To assess controllability, we sweep the relative Klear–DECS weights on Qwen3-4B-Thinking-2507 under a fixed training budget. Table 2 reports five interior compositions and representative baselines: SimpleSD (Zhang et al., 2026a), Qwen3-4B-Thinking-2507-Art (Wu et al., 2026a), PromptCoT 2.0 (Zhao et al., 2025), and model interpolation (MI) (Wu et al., 2026b).

Responses generally shorten as the DECS fraction increases, while intermediate compositions preserve or improve accuracy. On AIME 2024, for example, $\rho_{\mathrm{DECS}} = 0.625$ achieves 84.9% accuracy with 15,048 tokens, exceeding every external baseline and both single-anchor policies in accuracy while using fewer tokens. The non-dominated Lightning Weave policies consequently trace an empirical Pareto frontier in Figure 3(b). In Figure 3(c), we evaluate AIME 2024 accuracy under different token budgets. Lightning Weave outperforms both single-anchor policies at every budget, with the largest gains under tight budgets. Together, these results establish a controllable accuracy–efficiency frontier whose gains persist across metrics and inference budgets.

Table 2: Accuracy–efficiency frontiers on Qwen3-4B-Thinking-2507. We report the Klear–DECS sweep and representative baselines on three mathematical reasoning benchmarks. The non-dominated Lightning Weave operating points trace an empirical Pareto frontier across all three benchmarks.

Policy	AIME 2024		AIME 2025		HMMT 2025	
	Acc.↑	#Tok.↓	Acc.↑	#Tok.↓	Acc.↑	#Tok.↓
Base	77.9	19,442	73.9	21,170	51.7	23,906
Klear-only	83.0	18,128	78.5	19,792	56.1	23,377
DECS-only	79.0	17,680	75.5	19,460	50.4	21,369
Klear–DECS composition						
$\rho_{\mathrm{DECS}} = 0.250$	83.8	17,474	78.5	19,300	55.6	22,774
$\rho_{\mathrm{DECS}} = 0.375$	85.1	17,038	79.3	18,760	56.6	22,197
$\rho_{\mathrm{DECS}} = 0.500$	85.3	16,003	80.4	17,970	54.4	20,440
$\rho_{\mathrm{DECS}} = 0.625$	84.9	15,048	80.4	16,963	52.9	18,470
$\rho_{\mathrm{DECS}} = 0.750$	83.3	14,310	79.6	16,409	50.9	16,147
Additional baselines						
SimpleSD	76.7	19,473	75.2	21,157	51.0	24,053
Art	78.5	15,456	76.3	17,703	49.4	17,339
PromptCoT 2.0	75.8	20,177	76.9	21,455	54.0	24,838
MI ($\lambda = 0.8$)	83.1	15,885	77.5	17,542	52.3	19,653

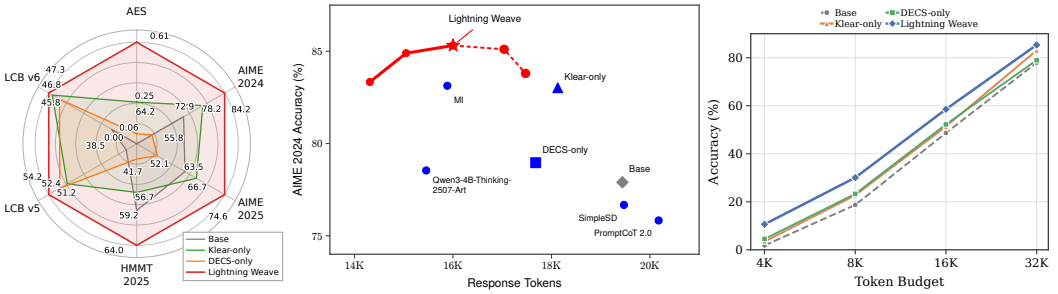

(a) (b) (c)

Figure 3: (a): The performance of Lightning Weave and baseline policies on Qwen3.5-4B across AES and all five benchmarks; Lightning Weave achieves the strongest overall capability profile. (b): Accuracy–efficiency trade-off of Lightning Weave and the baselines on AIME 2024 with Qwen3-4B-Thinking-2507. Varying the anchor weights yields a family of Lightning Weave policies whose non-dominated operating points trace a Pareto frontier against the efficient-reasoning baselines. The solid red line connects these Pareto-optimal points, the dashed red line connects the remaining weight-sweep settings, and the star marks the highest-accuracy setting. (c): The performance of the Base, Klear-only, DECS-only, and Lightning Weave policies on AIME 2024 under different token budgets; Lightning Weave performs best at every budget.

4.4 Generalization to Additional Anchor Combinations

Table 3: Generalization to additional anchor combinations on Qwen3-4B. We report accuracy (Acc.; %) and mean response tokens (#Tok.) for each benchmark, together with average accuracy, response tokens, and AES. Multi-anchor compositions use equal normalized weights. The best value for each metric is marked in **bold** and the second-best is underlined.

Policy	AIME 2024		AIME 2025		HMMT 2025		LCB v5		LCB v6		Average		
	Acc.↑	#Tok.↓	Acc.↑	#Tok.↓	Acc.↑	#Tok.↓	Acc.↑	#Tok.↓	Acc.↑	#Tok.↓	Acc.↑	#Tok.↓	AES↑
Base	72.9	14,641	65.4	17,844	41.4	17,626	53.0	13,843	46.8	14,663	55.90	15,723	0.00
Single anchor													
Klear-only	75.8	15,061	71.3	17,715	45.6	18,230	57.4	13,252	49.6	13,776	59.94	15,607	0.23
DECS-only	68.3	**10,918**	60.6	**12,429**	35.0	**11,862**	53.0	12,531	46.2	13,437	52.62	**12,235**	−0.09
MiMo-RL	76.0	16,646	71.3	19,580	45.8	19,879	57.0	14,383	47.9	14,939	59.60	17,085	0.12
Two anchors													
Klear+DECS	76.0	11,521	70.1	13,816	43.0	13,743	59.2	**11,702**	51.3	**12,357**	59.92	12,628	0.41
Klear+MiMo-RL	**78.7**	19,031	**74.9**	21,355	**50.5**	22,328	**63.4**	14,778	**54.4**	15,395	**64.38**	18,577	0.31
DECS+MiMo-RL	74.2	12,966	66.5	15,336	40.9	15,144	56.5	12,915	48.3	13,333	57.28	13,939	0.18
Three anchors													
Klear+DECS+MiMo-RL	**78.7**	14,268	73.6	16,838	47.5	16,731	59.2	12,930	53.4	13,609	62.50	14,875	**0.42**

We further introduce MiMo-RL (LLM-Core Xiaomi et al., 2025) as an additional accuracy-oriented anchor and compose it with Klear and DECS, using Qwen3-4B as the student model. As shown in Table 3, combining the two accuracy anchors, Klear+MiMo-RL, achieves the highest overall accuracy but also substantially increases the number of inference tokens. In contrast, DECS+MiMo-RL shows the same qualitative pattern as Klear+DECS, improving accuracy over the base model while reducing response tokens. We further extend Lightning Weave to a three-anchor composition. Relative to each of its two-anchor subsets, adding the third anchor shifts the operating point toward the corresponding capability: adding DECS to Klear+MiMo-RL improves efficiency, whereas adding Klear or MiMo-RL to the corresponding DECS pair improves accuracy. The resulting composition balances all three shifts and achieves the highest AES of 0.42.

4.5 Ablation Study

Tilted-target correction. We compare Tilted-Target with Online DOPD, which recomputes each policy shift on current-student trajectories, and Naive Offline, which directly optimizes the cached shift with a behavior-sampled KL penalty. Within each of the Klear, DECS, and Klear+DECS settings, all methods use matched student initializations, prompt sequences, trajectory budgets, and update budgets. As shown in Table 4(a), Tilted-Target performs comparably to Online DOPD across

all three settings. In the two-anchor setting, however, it avoids concurrently serving the four models that constitute the anchor pairs during training, making the overall training pipeline substantially more accessible. It also consistently yields a better trade-off than Naive Offline: average accuracy improves by 1.51 and 3.85 points with Klear and DECS, respectively, while the two-anchor setting uses 17.6% fewer tokens with slightly higher accuracy. These results show that the explicit target stabilizes cached-shift optimization while retaining the benefits of online supervision.

Multi-anchor composition. We compare Lightning Weave with Data Mixture, which interleaves equal amounts of data scored separately by Klear and DECS, and Sequential Composition, which applies the two single-anchor shifts in successive stages in either order. As shown in Table 4(b), Lightning Weave improves accuracy over Data Mixture on all five benchmarks while using 3.8–8.7% fewer tokens. Sequential Composition is strongly order-sensitive, with the last applied anchor determining whether the result favors accuracy or efficiency. By avoiding both mixture dilution and ordering bias, Lightning Weave achieves the best overall accuracy–efficiency trade-off, as reflected by the highest AES of 0.41.

Table 4: Policy-shift distillation and multi-anchor composition ablations on Qwen3-4B across mathematics and code. The upper block compares Online DOPD, Naive Offline, and Tilted-Target under Klear-only, DECS-only, and their composition; Tilted-Target closely matches Online DOPD while improving the accuracy–efficiency trade-off over Naive Offline. The lower block compares Lightning Weave with Data Mixture and both sequential orders under equal anchor weights and matched trajectory and update budgets. We report accuracy and mean response tokens for each benchmark, together with five-benchmark averages and AES. The best and second-best values within each comparison are marked in **bold** and underlined, respectively.

Variant	AIME 2024		AIME 2025		HMMT 2025		LCB v5		LCB v6		Average		
	Acc.↑	#Tok.↓	Acc.↑	#Tok.↓	Acc.↑	#Tok.↓	Acc.↑	#Tok.↓	Acc.↑	#Tok.↓	Acc.↑	#Tok.↓	AES↑
Base	72.9	14,641	65.4	17,844	41.4	17,626	53.0	13,843	46.8	14,663	55.90	15,723	0.00
(a) Tilted-target correction													
Single anchor: Qwen3-4B + Klear-only													
Online DOPD	**76.4**	**14,673**	69.8	17,903	45.3	18,447	57.7	13,950	50.6	14,461	**59.96**	15,887	0.21
Naive Offline	70.7	21,508	65.8	23,671	**45.6**	24,401	**58.2**	15,549	**51.7**	16,316	58.43	20,289	−0.15
Tilted-Target (ours)	75.8	15,061	**71.3**	**17,715**	**45.6**	**18,230**	57.4	**13,252**	49.6	**13,776**	59.94	**15,607**	**0.23**
Single anchor: Qwen3-4B + DECS-only													
Online DOPD	68.2	10,240	59.0	11,942	34.9	11,663	52.0	12,017	45.2	12,832	51.87	11,739	−0.11
Naive Offline	64.5	**9,472**	55.0	**10,796**	32.1	**10,065**	49.3	**11,071**	42.9	**11,738**	48.77	**10,628**	−0.31
Tilted-Target (ours)	**68.3**	10,918	**60.6**	12,429	**35.0**	11,862	**53.0**	12,531	**46.2**	13,437	**52.62**	12,235	**−0.09**
Two anchors: Qwen3-4B + Klear+DECS													
Online DOPD	**76.1**	12,591	70.9	15,129	**45.6**	15,454	**59.8**	12,921	**52.3**	13,582	**60.93**	13,935	0.38
Naive Offline	74.6	15,352	**72.0**	17,468	44.2	16,656	58.3	13,338	49.6	13,771	59.76	15,317	0.24
Tilted-Target (ours)	76.0	**11,521**	70.1	**13,816**	43.0	**13,743**	59.2	**11,702**	51.3	**12,357**	59.92	**12,628**	**0.41**
(b) Multi-anchor composition													
Data Mixture	75.4	12,579	68.7	14,965	42.9	15,059	55.4	12,551	51.0	12,840	58.68	13,599	0.29
Klear-only → DECS-only	74.3	**11,389**	65.8	**13,702**	41.4	**13,474**	56.5	**11,609**	50.8	**12,160**	57.76	**12,467**	0.31
DECS-only → Klear-only	**77.4**	13,337	**71.8**	16,088	**46.0**	16,551	57.7	12,555	**51.5**	12,959	**60.88**	14,298	0.37
Lightning Weave	76.0	11,521	70.1	13,816	43.0	13,743	**59.2**	11,702	51.3	12,357	59.92	12,628	**0.41**

5 CONCLUSION

In this work, we introduced capability composition as a new route to efficient reasoning. Rather than jointly optimizing competing accuracy and efficiency objectives from scratch, our approach reuses independently post-trained specialists, extracts the behavioral shift acquired by each, and composes these shifts into one student model. We instantiate this idea with Lightning Weave, which aligns multiple policy shifts at shared student token states and combines them into a joint tilted target. Tilted-Target DOPD converts cached shifts into explicit targets with well-defined fixed points, enabling stable offline training without concurrently serving live anchor models. Across diverse student models and benchmarks spanning mathematics and code, Lightning Weave consistently improves the accuracy–efficiency trade-off over the base and single-anchor policies, generalizes to additional anchor combinations, and yields a controllable empirical Pareto frontier as the composition weights vary. These results demonstrate the value of Lightning Weave as a new approach to efficient reasoning, improving the accuracy–efficiency frontier by composing capabilities learned independently for distinct objectives.

REFERENCES

Rishabh Agarwal, Nino Vieillard, Yongchao Zhou, Piotr Stanczyk, Sabela Ramos Garea, Matthieu Geist, and Olivier Bachem. On-policy distillation of language models: Learning from self-generated mistakes. In B. Kim, Y. Yue, S. Chaudhuri, K. Fragkiadaki, M. Khan, and Y. Sun (eds.), *International Conference on Learning Representations*, volume 2024, pp. 21246–21263, 2024. URL https://proceedings.iclr.cc/paper_files/paper/2024/file/5be69a584901a26c521c2b51e40a4c20-Paper-Conference.pdf.

Pranjal Aggarwal and Sean Welleck. L1: Controlling how long a reasoning model thinks with reinforcement learning. In *Second Conference on Language Modeling*, 2025. URL https://openreview.net/forum?id=4jdIxXBNve.

Mohammadreza Armandpour, Fatih Ilhan, David Harrison, Ajay Jaiswal, Duc N. M Hoang, Fartash Faghri, Yizhe Zhang, Minsik Cho, and Mehrdad Farajtabar. Unmasking on-policy distillation: Where it helps, where it hurts, and why, 2026. URL https://arxiv.org/abs/2605.10889.

Zefan Cai, Wen Xiao, Hanshi Sun, Cheng Luo, Yikai Zhang, Ke Wan, Yucheng Li, Yeyang Zhou, Li-Wen Chang, Jiuxiang Gu, Zhen Dong, Animashree Anandkumar, Abedelkadir Asi, and Junjie Hu. R-KV: Redundancy-aware KV cache compression for reasoning models. In *Advances in Neural Information Processing Systems*, volume 38, 2025. URL https://proceedings.neurips.cc/paper_files/paper/2025/hash/57e0358aed314784cad14a26e1eba642-Abstract-Conference.html.

Tianlei Chen, Jiao Ou, Ziyuan Liu, Ruiming Tang, Jian Liang, and Han Li. Counteraction-aware multi-teacher on-policy distillation for general capability recovery with domain preservation, 2026. URL https://arxiv.org/abs/2605.27115.

Shiyuan Feng, Huan-ang Gao, Haohan Chi, Hanlin Wu, Zhilong Zhang, Zheng Jiang, Bingxiang He, Wei-Ying Ma, Ya-Qin Zhang, and Hao Zhou. Weak-to-strong generalization via direct on-policy distillation, 2026. URL https://arxiv.org/abs/2607.05394.

Yichao Fu, Junda Chen, Siqi Zhu, Zheyu Fu, Zhongdongming Dai, Yonghao Zhuang, Yian Ma, Aurick Qiao, Tajana Rosing, Ion Stoica, and Hao Zhang. Efficiently scaling LLM reasoning programs with Certaindex. In *Advances in Neural Information Processing Systems*, volume 38, 2025a. URL https://papers.nips.cc/paper_files/paper/2025/hash/d037fd021c9aace128b8ce25001cdb6c-Abstract-Conference.html.

Yichao Fu, Rui Ge, Zelei Shao, Zhijie Deng, and Hao Zhang. Scaling speculative decoding with lookahead reasoning. In *Advances in Neural Information Processing Systems*, volume 38, 2025b. URL https://proceedings.neurips.cc/paper_files/paper/2025/file/fb65f4aed3027871f349dbc91cd27ae4-Paper-Conference.pdf.

Yichao Fu, Xuewei Wang, Yuandong Tian, and Jiawei Zhao. Deep think with confidence, 2025c. URL https://arxiv.org/abs/2508.15260.

Yuqian Fu, Haohuan Huang, Kaiwen Jiang, Jiacai Liu, Zhuo Jiang, Yuanheng Zhu, and Dongbin Zhao. Revisiting on-policy distillation: Empirical failure modes and simple fixes, 2026. URL https://arxiv.org/abs/2603.25562.

Huan-ang Gao, Haohan Chi, Yong Yan, Shiyuan Feng, Hanlin Wu, Zheng Jiang, Bingxiang He, Wei-Ying Ma, Ya-Qin Zhang, and Hao Zhou. Open-MOPD: Diagnosing and fixing capability imbalance in multi-teacher on-policy distillation, 2026. URL https://arxiv.org/abs/2608.19098.

Yuxian Gu, Li Dong, Furu Wei, and Minlie Huang. MiniLLM: Knowledge distillation of large language models. In B. Kim, Y. Yue, S. Chaudhuri, K. Fragkiadaki, M. Khan, and Y. Sun (eds.), *International Conference on Learning Representations*, volume 2024, pp. 32694–32717, 2024. URL https://proceedings.iclr.cc/paper_files/paper/2024/file/8ac015d409635f196f9e3e9dcfb9a94e-Paper-Conference.pdf.

Yiju Guo, Ganqu Cui, Lifan Yuan, Ning Ding, Zexu Sun, Bowen Sun, Huimin Chen, Ruobing Xie, Jie Zhou, Yankai Lin, Zhiyuan Liu, and Maosong Sun. Controllable preference optimization: Toward controllable multi-objective alignment. In Yaser Al-Onaizan, Mohit Bansal, and Yun-Nung Chen (eds.), *Proceedings of the 2024 Conference on Empirical Methods in Natural Language Processing*, pp. 1437–1454, Miami, Florida, USA, November 2024. Association for Computational Linguistics. doi: 10.18653/v1/2024.emnlp-main.85. URL https://aclanthology.org/2024.emnlp-main.85/.

Tingxu Han, Zhenting Wang, Chunrong Fang, Shiyu Zhao, Shiqing Ma, and Zhenyu Chen. Token-budget-aware LLM reasoning. In *Findings of the Association for Computational Linguistics: ACL 2025*, pp. 24842–24855. Association for Computational Linguistics, 2025. doi: 10.18653/v1/2025.findings-acl.1274. URL https://aclanthology.org/2025.findings-acl.1274/.

Shibo Hao, Sainbayar Sukhbaatar, DiJia Su, Xian Li, Zhiting Hu, Jason Weston, and Yuandong Tian. Training large language models to reason in a continuous latent space. In *Second Conference on Language Modeling*, 2025. URL https://openreview.net/forum?id=Itxz7S4Ip3.

Harvard–MIT Mathematics Tournament. Archive of February 2025, 2025. URL https://www.hmmt.org/www/archive/282.

Haonan He, Haodi Lei, Yun Luo, Haoran Zhang, Shunkai Zhang, Yizhuo Li, Shengji Tang, Zhilin Wang, Runzhe Zhan, Lei Bai, Ganqu Cui, Fangchen Yu, Yafu Li, Peng Ye, Ning Ding, and Yu Cheng. SimpleOPD: Simple tokenizer-agnostic on-policy distillation for long-context reasoning, 2026. URL https://arxiv.org/abs/2608.14277.

Jujie He, Jiacai Liu, Chris Yuhao Liu, Rui Yan, Chaojie Wang, Peng Cheng, Xiaoyu Zhang, Fuxiang Zhang, Jiacheng Xu, Wei Shen, Siyuan Li, Liang Zeng, Tianwen Wei, Cheng Cheng, Bo An, Yang Liu, and Yahui Zhou. Skywork Open Reasoner 1 technical report, 2025. URL https://arxiv.org/abs/2505.22312.

Gabriel Ilharco, Marco Tulio Ribeiro, Mitchell Wortsman, Suchin Gururangan, Ludwig Schmidt, Hannaneh Hajishirzi, and Ali Farhadi. Editing models with task arithmetic. In *The Eleventh International Conference on Learning Representations*, 2023. URL https://openreview.net/forum?id=6t0Kwf8-jrj.

Naman Jain, King Han, Alex Gu, Wen-Ding Li, Fanjia Yan, Tianjun Zhang, Sida Wang, Armando Solar-Lezama, Koushik Sen, and Ion Stoica. LiveCodeBench: Holistic and contamination free evaluation of large language models for code. In Y. Yue, A. Garg, N. Peng, F. Sha, and R. Yu (eds.), *International Conference on Learning Representations*, volume 2025, pp. 58791–58831, 2025. URL https://proceedings.iclr.cc/paper_files/paper/2025/file/94074dd5a072d28ff75a76dabed43767-Paper-Conference.pdf.

Shuyang Jiang, Yusheng Liao, Ya Zhang, Yanfeng Wang, and Yu Wang. Overthinking reduction with decoupled rewards and curriculum data scheduling. In C. Vondrick, B. Hariharan, C. Raffel, L. Pinto, D. Yang, and A. Faust (eds.), *International Conference on Learning Representations*, volume 2026, pp. 114966–114995, 2026. URL https://proceedings.iclr.cc/paper_files/paper/2026/file/bb0fea29f7aa6ede17e906ac6a225f34-Paper-Conference.pdf.

Woogyeol Jin, Taywon Min, Yongjin Yang, Dennis Wei, Yi Zhou, Swanand Kadhe, Nathalie Baracaldo, and Kimin Lee. Entropy-aware on-policy distillation of language models. In *Proceedings of the 43rd International Conference on Machine Learning*, 2026. URL https://icml.cc/virtual/2026/poster/64855.

Jongwoo Ko, Sara Abdali, Young Jin Kim, Tianyi Chen, and Pashmina Cameron. Scaling reasoning efficiently via relaxed on-policy distillation, 2026. URL https://arxiv.org/abs/2603.11137.

Xiaochong Lan, Yu Zheng, Shiteng Cao, and Yong Li. The thinking spectrum: An empirical study of tunable reasoning in LLMs through model merging, 2025. URL https://arxiv.org/abs/2509.22034.

Margaret Li, Suchin Gururangan, Tim Dettmers, Mike Lewis, Tim Althoff, Noah A. Smith, and Luke Zettlemoyer. Branch-train-merge: Embarrassingly parallel training of expert language models, 2022. URL https://arxiv.org/abs/2208.03306.

Yaxuan Li, Yuxin Zuo, Bingxiang He, Jinqian Zhang, Chaojun Xiao, Cheng Qian, Tianyu Yu, Huanang Gao, Wenkai Yang, Zhiyuan Liu, and Ning Ding. Rethinking on-policy distillation of large language models: Phenomenology, mechanism, and recipe, 2026. URL https://arxiv.org/abs/2604.13016.

Kun Liang, Clive Bai, Xin Xu, Chenming Tang, Sanwoo Lee, Weijie Liu, Saiyong Yang, and Yunfang Wu. ORBIT: On-policy exploration-exploitation for controllable multi-budget reasoning, 2026. URL https://arxiv.org/abs/2601.08310.

Baohao Liao, Yuhui Xu, Hanze Dong, Junnan Li, Christof Monz, Silvio Savarese, Doyen Sahoo, and Caiming Xiong. Reward-guided speculative decoding for efficient LLM reasoning. In *Proceedings of the 42nd International Conference on Machine Learning*, volume 267 of *Proceedings of Machine Learning Research*, pp. 37555–37572. PMLR, 2025. URL https://proceedings.mlr.press/v267/liao25f.html.

Shih-Yang Liu, Xin Dong, Ximing Lu, Shizhe Diao, Mingjie Liu, Min-Hung Chen, Hongxu Yin, Yu-Chiang Frank Wang, Kwang-Ting Cheng, Yejin Choi, Jan Kautz, and Pavlo Molchanov. DLER: Doing length penalty right - incentivizing more intelligence per token via reinforcement learning, 2025. URL https://arxiv.org/abs/2510.15110.

LLM-Core Xiaomi, Bingquan Xia, Bowen Shen, Cici, Dawei Zhu, Di Zhang, Gang Wang, Hailin Zhang, Huaqiu Liu, Jiebao Xiao, Jinhao Dong, Liang Zhao, Peidian Li, Peng Wang, Shihua Yu, Shimao Chen, Weikun Wang, Wenhan Ma, Xiangwei Deng, Yi Huang, Yifan Song, Zihan Jiang, Bowen Ye, Can Cai, Chenhong He, Dong Zhang, Duo Zhang, Guoan Wang, Hao Tian, Haochen Zhao, Heng Qu, Hongshen Xu, Jun Shi, Kainan Bao, Kai Fang, Kang Zhou, Kangyang Zhou, Lei Li, Menghang Zhu, Nuo Chen, Qiantong Wang, Shaohui Liu, Shicheng Li, Shuhao Gu, Shuhuai Ren, Shuo Liu, Sirui Deng, Weiji Zhuang, Weiwei Lv, Wenyu Yang, Xin Zhang, Xing Yong, Xing Zhang, Xingchen Song, Xinzhe Xu, Xu Wang, Yihan Yan, Yu Tu, Yuanyuan Tian, Yudong Wang, Yue Yu, Zhenru Lin, Zhichao Song, and Zihao Yue. MiMo: Unlocking the reasoning potential of language model – from pretraining to posttraining, 2025. URL https://arxiv.org/abs/2505.07608.

Kevin Lu and Thinking Machines Lab. On-policy distillation. *Thinking Machines Lab: Connectionism*, 2025. doi: 10.64434/tml.20251026. https://thinkingmachines.ai/blog/on-policy-distillation.

Feng Luo, Yu-Neng Chuang, Guanchu Wang, Hoang Anh Duy Le, Shaochen Zhong, Hongyi Liu, Jiayi Yuan, Yang Sui, Vladimir Braverman, Vipin Chaudhary, and Xia Hu. AutoL2S: Auto long-short reasoning for efficient large language models. In Maria Liakata, Viviane P. Moreira, Jiajun Zhang, and David Jurgens (eds.), *Findings of the Association for Computational Linguistics: ACL 2026*, pp. 16836–16858, San Diego, California, United States, July 2026a. Association for Computational Linguistics. ISBN 979-8-89176-395-1. doi: 10.18653/v1/2026.findings-acl.831. URL https://aclanthology.org/2026.findings-acl.831/.

Haotian Luo, Haiying He, Yibo Wang, Shiwei Liu, Wei Li, Xiaochun Cao, Dacheng Tao, Naiqiang Tan, and Li Shen. O1-Pruner: Length-harmonizing fine-tuning for O1-like reasoning pruning. In Maria Liakata, Viviane P. Moreira, Jiajun Zhang, and David Jurgens (eds.), *Findings of the Association for Computational Linguistics: ACL 2026*, pp. 14242–14257, San Diego, California, United States, July 2026b. Association for Computational Linguistics. ISBN 979-8-89176-395-1. doi: 10.18653/v1/2026.findings-acl.697. URL https://aclanthology.org/2026.findings-acl.697/.

Wenhan Ma, Jianyu Wei, Liang Zhao, Hailin Zhang, Bangjun Xiao, Lei Li, Qibin Yang, Bofei Gao, Yudong Wang, Rang Li, Jinhao Dong, Zhifang Sui, and Fuli Luo. MOPD: Multi-teacher on-policy distillation for capability integration in LLM post-training, 2026. URL https://arxiv.org/abs/2606.30406.

Michael S Matena and Colin Raffel. Merging models with fisher-weighted averaging. In S. Koyejo, S. Mohamed, A. Agarwal, D. Belgrave, K. Cho, and A. Oh (eds.), *Advances in Neural Information*

Processing Systems, volume 35, pp. 17703–17716. Curran Associates, Inc., 2022. doi: 10.52202/068431-1287. URL https://proceedings.neurips.cc/paper_files/paper/2022/file/70c26937fbf3d4600b69a129031b66ec-Paper-Conference.pdf.

Mathematical Association of America. MAA Invitational Competitions, 2026. URL https://maa.org/maa-invitational-competitions/.

Rui Pan, Yinwei Dai, Zhihao Zhang, Gabriele Oliaro, Zhihao Jia, and Ravi Netravali. SpecReason: Fast and accurate inference-time compute via speculative reasoning. In *Advances in Neural Information Processing Systems*, volume 38, 2025. URL https://proceedings.neurips.cc/paper_files/paper/2025/hash/12c45a68e8433b21b91cd47731387fa4-Abstract-Conference.html.

Emilio Parisotto, Jimmy Lei Ba, and Ruslan Salakhutdinov. Actor-mimic: Deep multitask and transfer reinforcement learning. In *International Conference on Learning Representations*, 2016. URL https://openreview.net/forum?id=4zXscyOrI_m.

Qwen Team. Qwen3.5: Towards native multimodal agents, February 2026. URL https://qwen.ai/blog?id=qwen3.5.

Alexandre Rame, Guillaume Couairon, Corentin Dancette, Jean-Baptiste Gaya, Mustafa Shukor, Laure Soulier, and Matthieu Cord. Rewarded soups: towards pareto-optimal alignment by interpolating weights fine-tuned on diverse rewards. In A. Oh, T. Naumann, A. Globerson, K. Saenko, M. Hardt, and S. Levine (eds.), *Advances in Neural Information Processing Systems*, volume 36, pp. 71095–71134. Curran Associates, Inc., 2023. doi: 10.52202/075280-3114. URL https://proceedings.neurips.cc/paper_files/paper/2023/file/e12a3b98b67e8395f639fde4c2b03168-Paper-Conference.pdf.

Jiacheng Ruan, Jun Tang, Wenzhen Yuan, Ting Liu, Shuai Bai, Dayiheng Liu, Zhibo Yang, and Yuzhuo Fu. Contrastive on-policy distillation, 2026. URL https://arxiv.org/abs/2607.19046.

Andrei A. Rusu, Sergio Gomez Colmenarejo, Çağlar Gülçehre, Guillaume Desjardins, James Kirkpatrick, Razvan Pascanu, Volodymyr Mnih, Koray Kavukcuoglu, and Raia Hadsell. Policy distillation. In *International Conference on Learning Representations*, 2016. URL https://openreview.net/forum?id=9nHQRKrWAMt.

Chengchao Shen, Xinchao Wang, Jie Song, Li Sun, and Mingli Song. Amalgamating knowledge towards comprehensive classification. *Proceedings of the AAAI Conference on Artificial Intelligence*, 33(01):3068–3075, July 2019a. ISSN 2159-5399. doi: 10.1609/aaai.v33i01.33013068. URL http://dx.doi.org/10.1609/aaai.v33i01.33013068.

Chengchao Shen, Mengqi Xue, Xinchao Wang, Jie Song, Li Sun, and Mingli Song. Customizing student networks from heterogeneous teachers via adaptive knowledge amalgamation. In *Proceedings of the IEEE/CVF International Conference on Computer Vision (ICCV)*, October 2019b.

Mingyang Song and Mao Zheng. A survey of on-policy distillation for large language models, 2026. URL https://arxiv.org/abs/2604.00626.

Zhenpeng Su, Leiyu Pan, Xue Bai, Dening Liu, Guanting Dong, Jiaming Huang, Minxuan Lv, Wenping Hu, Fuzheng Zhang, Kun Gai, and Guorui Zhou. Klear-Reasoner: Advancing reasoning capability via gradient-preserving clipping policy optimization, 2026. URL https://arxiv.org/abs/2508.07629.

Team Olmo, Allyson Ettinger, Amanda Bertsch, Bailey Kuehl, David Graham, David Heineman, Dirk Groeneveld, Faeze Brahman, Finbarr Timbers, Hamish Ivison, Jacob Morrison, Jake Poznanski, Kyle Lo, Luca Soldaini, Matt Jordan, Mayee Chen, Michael Noukhovitch, Nathan Lambert, Pete Walsh, Pradeep Dasigi, Robert Berry, Saumya Malik, Saurabh Shah, Scott Geng, Shane Arora, Shashank Gupta, Taira Anderson, Teng Xiao, Tyler Murray, Tyler Romero, Victoria Graf, Akari Asai, Akshita Bhagia, Alexander Wettig, Alisa Liu, Aman Rangapur, Chloe Anastasiades, Costa Huang, Dustin Schwenk, Harsh Trivedi, Ian Magnusson, Jaron Lochner, Jiacheng Liu, Lester James V. Miranda, Maarten Sap, Malia Morgan, Michael Schmitz, Michal

Guerquin, Michael Wilson, Regan Huff, Ronan Le Bras, Rui Xin, Rulin Shao, Sam Skjonsberg, Shannon Zejiang Shen, Shuyue Stella Li, Tucker Wilde, Valentina Pyatkin, Will Merrill, Yapei Chang, Yuling Gu, Zhiyuan Zeng, Ashish Sabharwal, Luke Zettlemoyer, Pang Wei Koh, Ali Farhadi, Noah A. Smith, and Hannaneh Hajishirzi. Olmo 3, 2026. URL https://arxiv.org/abs/2512.13961.

Yee Teh, Victor Bapst, Wojciech M. Czarnecki, John Quan, James Kirkpatrick, Raia Hadsell, Nicolas Heess, and Razvan Pascanu. Distral: Robust multitask reinforcement learning. In I. Guyon, U. Von Luxburg, S. Bengio, H. Wallach, R. Fergus, S. Vishwanathan, and R. Garnett (eds.), *Advances in Neural Information Processing Systems*, volume 30. Curran Associates, Inc., 2017. URL https://proceedings.neurips.cc/paper_files/paper/2017/file/0abdc563a06105aee3c6136871c9f4d1-Paper.pdf.

Jiayi Tian, Seyedarmin Azizi, Yequan Zhao, Erfan Baghaei Potraghloo, Sean McPherson, Sharath Nittur Sridhar, Zhengyang Wang, Zheng Zhang, Massoud Pedram, and Souvik Kundu. SkipKV: Selective skipping of KV generation and storage for efficient inference with large reasoning models. In *Proceedings of Machine Learning and Systems*, volume 8, 2026. URL https://proceedings.mlsys.org/paper_files/paper/2026/hash/45c1f6a8cbf2da59ebf2c802b4f742cd-Abstract-Conference.html.

Fanqi Wan, Xinting Huang, Deng Cai, Xiaojun Quan, Wei BI, and Shuming Shi. Knowledge fusion of large language models. In B. Kim, Y. Yue, S. Chaudhuri, K. Fragkiadaki, M. Khan, and Y. Sun (eds.), *International Conference on Learning Representations*, volume 2024, pp. 18303–18322, 2024. URL https://proceedings.iclr.cc/paper_files/paper/2024/file/4fd5cfd2e31bebbccfa5ffa354c04bdc-Paper-Conference.pdf.

Hao Wang, Kun Yuan, Wenlin Zhong, Minglei Zhang, Han Xiao, Ming Sun, and Honggang Qi. Cross-tokenizer on-policy distillation via byte-prefix marginalization, 2026a. URL https://arxiv.org/abs/2607.22334.

Yuanyi Wang, Su Lu, Yanggan Gu, Pengkai Wang, Yifan Yang, Zhaoyi Yan, Congkai Xie, Jianmin Wu, and Hongxia Yang. Not all disagreement is learnable: Token teachability in on-policy distillation, 2026b. URL https://arxiv.org/abs/2605.26844.

Mitchell Wortsman, Gabriel Ilharco, Samir Ya Gadre, Rebecca Roelofs, Raphael Gontijo-Lopes, Ari S Morcos, Hongseok Namkoong, Ali Farhadi, Yair Carmon, Simon Kornblith, and Ludwig Schmidt. Model soups: averaging weights of multiple fine-tuned models improves accuracy without increasing inference time. In Kamalika Chaudhuri, Stefanie Jegelka, Le Song, Csaba Szepesvari, Gang Niu, and Sivan Sabato (eds.), *Proceedings of the 39th International Conference on Machine Learning*, volume 162 of *Proceedings of Machine Learning Research*, pp. 23965–23998. PMLR, 17–23 Jul 2022. URL https://proceedings.mlr.press/v162/wortsman22a.html.

Han Wu, Yuxuan Yao, Shuqi Liu, Zehua Liu, Xiaojin Fu, Xiongwei Han, Xing Li, Hui-Ling Zhen, Tao Zhong, and Mingxuan Yuan. Unlocking efficient long-to-short LLM reasoning with model merging, 2025. URL https://arxiv.org/abs/2503.20641.

Taiqiang Wu, Zenan Xu, Bo Zhou, and Ngai Wong. The art of efficient reasoning: Data, reward, and optimization, 2026a. URL https://arxiv.org/abs/2602.20945.

Taiqiang Wu, Runming Yang, Tao Liu, Jiahao Wang, and Ngai Wong. Revisiting model interpolation for efficient reasoning, 2026b. URL https://arxiv.org/abs/2510.10977.

Yecheng Wu, Song Han, and Han Cai. Lightning OPD: Efficient post-training for large reasoning models with offline on-policy distillation, 2026c. URL https://arxiv.org/abs/2604.13010.

Yecheng Wu, Song Han, and Han Cai. Lightning OPD 2.0: Mitigating style bias in cross-teacher on-policy distillation for large reasoning models, 2026d. URL https://arxiv.org/abs/2607.28449.

Heming Xia, Chak Tou Leong, Wenjie Wang, Yongqi Li, and Wenjie Li. TokenSkip: Controllable chain-of-thought compression in LLMs. In *Proceedings of the 2025 Conference on Empirical Methods in Natural Language Processing*, pp. 3351–3363. Association for Computational Linguistics, 2025. doi: 10.18653/v1/2025.emnlp-main.165. URL https://aclanthology.org/2025.emnlp-main.165/.

Prateek Yadav, Derek Tam, Leshem Choshen, Colin Raffel, and Mohit Bansal. TIES-Merging: Resolving interference when merging models. In A. Oh, T. Naumann, A. Globerson, K. Saenko, M. Hardt, and S. Levine (eds.), *Advances in Neural Information Processing Systems*, volume 36, pp. 7093–7115. Curran Associates, Inc., 2023. doi: 10.52202/075280-0310. URL https://proceedings.neurips.cc/paper_files/paper/2023/file/1644c9af28ab7916874f6fd6228a9bcf-Paper-Conference.pdf.

An Yang, Anfeng Li, Baosong Yang, Beichen Zhang, Binyuan Hui, Bo Zheng, Bowen Yu, Chang Gao, Chengen Huang, Chenxu Lv, Chujie Zheng, Dayiheng Liu, Fan Zhou, Fei Huang, Feng Hu, Hao Ge, Haoran Wei, Huan Lin, Jialong Tang, Jian Yang, Jianhong Tu, Jianwei Zhang, Jianxin Yang, Jiaxi Yang, Jing Zhou, Jingren Zhou, Junyang Lin, Kai Dang, Keqin Bao, Kexin Yang, Le Yu, Lianghao Deng, Mei Li, Mingfeng Xue, Mingze Li, Pei Zhang, Peng Wang, Qin Zhu, Rui Men, Ruize Gao, Shixuan Liu, Shuang Luo, Tianhao Li, Tianyi Tang, Wenbiao Yin, Xingzhang Ren, Xinyu Wang, Xinyu Zhang, Xuancheng Ren, Yang Fan, Yang Su, Yichang Zhang, Yinger Zhang, Yu Wan, Yuqiong Liu, Zekun Wang, Zeyu Cui, Zhenru Zhang, Zhipeng Zhou, and Zihan Qiu. Qwen3 technical report, 2025. URL https://arxiv.org/abs/2505.09388.

Enneng Yang, Zhenyi Wang, Li Shen, Shiwei Liu, Guibing Guo, Xingwei Wang, and Dacheng Tao. AdaMerging: Adaptive model merging for multi-task learning. In B. Kim, Y. Yue, S. Chaudhuri, K. Fragkiadaki, M. Khan, and Y. Sun (eds.), *International Conference on Learning Representations*, volume 2024, pp. 22743–22763, 2024a. URL https://proceedings.iclr.cc/paper_files/paper/2024/file/62868cc2fc1eb5cdf321d05b4b88510c-Paper-Conference.pdf.

Rui Yang, Xiaoman Pan, Feng Luo, Shuang Qiu, Han Zhong, Dong Yu, and Jianshu Chen. Rewards-in-context: Multi-objective alignment of foundation models with dynamic preference adjustment. In Ruslan Salakhutdinov, Zico Kolter, Katherine Heller, Adrian Weller, Nuria Oliver, Jonathan Scarlett, and Felix Berkenkamp (eds.), *Proceedings of the 41st International Conference on Machine Learning*, volume 235 of *Proceedings of Machine Learning Research*, pp. 56276–56297. PMLR, 21–27 Jul 2024b. URL https://proceedings.mlr.press/v235/yang24q.html.

Wenkai Yang, Weijie Liu, Ruobing Xie, Kai Yang, Saiyong Yang, and Yankai Lin. Learning beyond teacher: Generalized on-policy distillation with reward extrapolation, 2026a. URL https://arxiv.org/abs/2602.12125.

Zhuolin Yang, Zihan Liu, Yang Chen, Wenliang Dai, Boxin Wang, Sheng-Chieh Lin, Chankyu Lee, Yangyi Chen, Dongfu Jiang, Jiafan He, Renjie Pi, Grace Lam, Nayeon Lee, Alexander Bukharin, Mohammad Shoeybi, Bryan Catanzaro, and Wei Ping. Nemotron-Cascade 2: Post-training LLMs with cascade RL and multi-domain on-policy distillation, 2026b. URL https://arxiv.org/abs/2603.19220.

Yuxuan Yao, Shuqi LIU, Zehua Liu, Qintong Li, Mingyang LIU, Xiongwei Han, Zhijiang Guo, Han Wu, and Linqi Song. Activation-guided consensus merging for large language models. In D. Belgrave, C. Zhang, H. Lin, R. Pascanu, P. Koniusz, M. Ghassemi, and N. Chen (eds.), *Advances in Neural Information Processing Systems*, volume 38, Main Conference, pp. 124041–124069. Curran Associates, Inc., 2025. doi: 10.52202/085713-4133. URL https://proceedings.neurips.cc/paper_files/paper/2025/file/b395e7bd5eaf3e980386debf2e9d7f11-Paper-Conference.pdf.

Shan You, Chang Xu, Chao Xu, and Dacheng Tao. Learning from multiple teacher networks. In *Proceedings of the 23rd ACM SIGKDD International Conference on Knowledge Discovery and Data Mining*, KDD '17, pp. 1285–1294. ACM, August 2017. doi: 10.1145/3097983.3098135. URL http://dx.doi.org/10.1145/3097983.3098135.

Fangxu Yu, Weijia Xu, Michael Xu, Tianyi Zhou, and Zinan Lin. Weak-to-strong on-policy distillation, 2026. URL https://arxiv.org/abs/2607.26246.

Le Yu, Bowen Yu, Haiyang Yu, Fei Huang, and Yongbin Li. Language models are Super Mario: Absorbing abilities from homologous models as a free lunch. In Ruslan Salakhutdinov, Zico Kolter, Katherine Heller, Adrian Weller, Nuria Oliver, Jonathan Scarlett, and Felix Berkenkamp (eds.), *Proceedings of the 41st International Conference on Machine Learning*, volume 235 of *Proceedings of Machine Learning Research*, pp. 57755–57775. PMLR, 21–27 Jul 2024. URL https://proceedings.mlr.press/v235/yu24p.html.

Qiying Yu, Zheng Zhang, Ruofei Zhu, Yufeng Yuan, Xiaochen Zuo, Yu Yue, Weinan Dai, Tiantian Fan, Gaohong Liu, juncai liu, LingJun Liu, Xin Liu, Haibin Lin, Zhiqi Lin, Bole Ma, Guangming Sheng, Yuxuan Tong, Chi Zhang, Mofan Zhang, Ru Zhang, Wang Zhang, Hang Zhu, Jinhua Zhu, Jiaze Chen, Jiangjie Chen, Chengyi Wang, Hongli Yu, Yuxuan Song, Xiangpeng Wei, Hao Zhou, Jingjing Liu, Wei-Ying Ma, Ya-Qin Zhang, Lin Yan, Yonghui Wu, and Mingxuan Wang. DAPO: An open-source LLM reinforcement learning system at scale. In D. Belgrave, C. Zhang, H. Lin, R. Pascanu, P. Koniusz, M. Ghassemi, and N. Chen (eds.), *Advances in Neural Information Processing Systems*, volume 38, Main Conference, pp. 113222–113244. Curran Associates, Inc., 2025. doi: 10.52202/085713-3775. URL https://proceedings.neurips.cc/paper_files/paper/2025/file/a4277440d50f1f15d2cb4c14f7e0c0d2-Paper-Conference.pdf.

Ruixiang Zhang, Richard He Bai, Huangjie Zheng, Navdeep Jaitly, Ronan Collobert, and Yizhe Zhang. Embarrassingly simple self-distillation improves code generation, 2026a. URL https://arxiv.org/abs/2604.01193.

Zhaoyang Zhang, Shuli Jiang, Yantao Shen, Yuting Zhang, Dhananjay Ram, Shuo Yang, Zhuowen Tu, Wei Xia, and Stefano Soatto. Reinforcement-aware knowledge distillation for LLM reasoning. In *Proceedings of the 43rd International Conference on Machine Learning*, 2026b. URL https://icml.cc/virtual/2026/poster/66775.

Zhen Zhang, Xuehai He, Weixiang Yan, Ao Shen, Chenyang Zhao, and Xin Eric Wang. Soft thinking: Unlocking the reasoning potential of LLMs in continuous concept space. In *Advances in Neural Information Processing Systems*, volume 38, 2025. URL https://proceedings.neurips.cc/paper_files/paper/2025/hash/f7396d1c54d51416958d63e285377103-Abstract-Conference.html.

Xueliang Zhao, Wei Wu, Jian Guan, Zhuocheng Gong, and Lingpeng Kong. PromptCoT 2.0: Scaling prompt synthesis for large language model reasoning, 2025. URL https://arxiv.org/abs/2509.19894.

Yifan Zhong, Chengdong Ma, Xiaoyuan Zhang, Ziran Yang, Haojun Chen, Qingfu Zhang, Siyuan Qi, and Yaodong Yang. Panacea: Pareto alignment via preference adaptation for LLMs. In A. Globerson, L. Mackey, D. Belgrave, A. Fan, U. Paquet, J. Tomczak, and C. Zhang (eds.), *Advances in Neural Information Processing Systems*, volume 37, pp. 75522–75558. Curran Associates, Inc., 2024. doi: 10.52202/079017-2405. URL https://proceedings.neurips.cc/paper_files/paper/2024/file/89f39d0b3d49a47606a165eefba2778c-Paper-Conference.pdf.

A THEORETICAL ANALYSIS AND PROOFS

This section analyzes the full-distribution formulation underlying Tilted-Target DOPD and Lightning Weave. We characterize the explicit learning target for offline capability transfer and the joint target obtained by composing multiple policy shifts. The results are stated for the zero-discount, token-level DOPD surrogate used in Section 3: at each fixed state, the anchor shift is treated as an immediate reward. They do not identify the resulting local target with the conditionals of the idealized sequence-level optimum in Eq. 3, whose conditionals can also depend on future shifts. We first derive a general variational identity, then apply it to one anchor pair and to a weighted composition of multiple anchor-pair shifts.

A.1 SETUP AND ASSUMPTIONS

Let $\mathcal{A}$ be the finite student-token action space and $\mathcal{P}(\mathcal{A})$ its probability simplex. Fix a token-level state s in the support of the cached state distribution d_{π_b}, and write $b_s(a) = \pi_b(a \mid s)$. We use d_{π_b} for the behavior-policy state distribution; the implementation replaces it by the corresponding finite empirical distribution of cached states. The target construction is pointwise in s. We make the following assumptions:

1. $\alpha > 0$ and $b_s(a) > 0$ for every $a \in \mathcal{A}$;
2. every aligned anchor score $r_i(a \mid s)$ is finite; and
3. b_s and the anchor scores are cached quantities and therefore do not depend on the optimized parameters θ.

These conditions hold for finite-logit softmax policies in exact arithmetic. More generally, the analysis can be restricted to any common support on which the conditions hold. For extensions to a non-empirical state distribution, we additionally assume that the reward, KL, and log-partition terms have finite expectations for the policies under consideration. This condition holds automatically for a finite cache under the assumptions above.

For a finite score function $r : \mathcal{A} \to \mathbb{R}$ and a distribution $p \in \mathcal{P}(\mathcal{A})$, define the local regularized objective

$$\Phi_s(p; r) = \sum_{a \in \mathcal{A}} p(a) r(a \mid s) - \alpha D_{\mathrm{KL}}(p \,\|\, b_s), \tag{12}$$

where $0 \log 0 = 0$. Its partition function and exponentially tilted distribution are

$$Z_r(s) = \sum_{a \in \mathcal{A}} b_s(a) \exp\left(\frac{r(a \mid s)}{\alpha}\right), \tag{13}$$

$$T_r(a \mid s) = \frac{b_s(a) \exp(r(a \mid s)/\alpha)}{Z_r(s)}. \tag{14}$$

Finiteness of $\mathcal{A}$ and of r implies $0 < Z_r(s) < \infty$, so $T_r(\cdot \mid s)$ is a well-defined, strictly positive distribution.

When all policies share an action space and both anchors are strictly positive on it, an anchor pair induces

$$r_i(a \mid s) = \log \frac{\pi_i^+(a \mid s)}{\pi_i^-(a \mid s)}. \tag{15}$$

The variational results below require only that r_i be finite; thus they also apply to the finite scores produced by cross-tokenizer alignment. The exact product-of-policy-ratios interpretation additionally requires Eq. 15. We describe the practical alignment procedure separately in Appendix B.4.

A.2 TILTED-TARGET DOPD: OBJECTIVE EQUIVALENCE AND FIXED POINT

Lemma A.1 (Exponential-tilting identity)**.** *For every $p \in \mathcal{P}(\mathcal{A})$,*

$$\alpha D_{\mathrm{KL}}(p \,\|\, T_r(\cdot \mid s)) = \alpha D_{\mathrm{KL}}(p \,\|\, b_s) - \sum_{a \in \mathcal{A}} p(a) r(a \mid s) + \alpha \log Z_r(s). \tag{16}$$

Proof. First suppose $p(a) > 0$ for every a. Equation 14 gives

$$\log T_r(a \mid s) = \log b_s(a) + \frac{r(a \mid s)}{\alpha} - \log Z_r(s).$$

Substituting this expression into the definition of KL divergence yields

$$\begin{aligned}\alpha D_{\mathrm{KL}}(p \,\|\, T_r) &= \alpha \sum_a p(a) \left[\log p(a) - \log b_s(a) - \frac{r(a \mid s)}{\alpha} + \log Z_r(s)\right] \\ &= \alpha D_{\mathrm{KL}}(p \,\|\, b_s) - \sum_a p(a) r(a \mid s) + \alpha \log Z_r(s),\end{aligned}$$

where the last term uses $\sum_a p(a) = 1$. For a distribution on the boundary of the simplex, the same identity follows by continuity using $\lim_{u \downarrow 0} u \log u = 0$, since both b_s and T_r are strictly positive. □

Proposition A.2 (Unique single-anchor target)**.** *For a fixed state s, the tilted distribution $T_r(\cdot \mid s)$ is the unique maximizer of the local objective in Eq. 12. In particular, taking $r = r_\Delta$ recovers the target q in Eq. 5.*

Proof. Rearranging Lemma A.1 gives

$$\Phi_s(p; r) = \alpha \log Z_r(s) - \alpha D_{\mathrm{KL}}(p \,\|\, T_r(\cdot \mid s)). \tag{17}$$

Gibbs' inequality gives $D_{\mathrm{KL}}(p \,\|\, T_r) \geq 0$, with equality if and only if $p = T_r$ because T_r is strictly positive. Since $\alpha > 0$, the stated maximizer is therefore unique. □

The pointwise result extends directly to the fixed offline state distribution. Define

$$\mathcal{J}_d(\pi; r) = \mathbb{E}_{s \sim d_{\pi_b}} \left[\Phi_s(\pi(\cdot \mid s); r)\right], \tag{18}$$

$$\mathcal{L}_d(\pi; r) = \alpha\, \mathbb{E}_{s \sim d_{\pi_b}} \left[D_{\mathrm{KL}}\big(\pi(\cdot \mid s) \,\|\, T_r(\cdot \mid s)\big)\right]. \tag{19}$$

Corollary A.3 (Offline objective equivalence)**.** *For every policy π,*

$$\mathcal{L}_d(\pi; r) = -\mathcal{J}_d(\pi; r) + \alpha\, \mathbb{E}_{s \sim d_{\pi_b}}[\log Z_r(s)]. \tag{20}$$

Consequently, minimizing $\mathcal{L}_d$ and maximizing $\mathcal{J}_d$ are equivalent over any common policy class, including a restricted parametric class. If that class can realize T_r on d_{π_b}-almost every state, then T_r is a global minimizer with zero loss; otherwise, training minimizes the expected reverse KL to this explicit target.

Proof. Take the expectation of Eq. 16 over the fixed distribution d_{π_b}. The final term in Eq. 20 depends only on cached quantities, not on π. The statements about optimization over a policy class follow immediately. □

Corollary A.4 (Fixed-point property)**.** *Suppose $\pi_{\theta^\star}(\cdot \mid s) = T_r(\cdot \mid s)$ for d_{π_b}-almost every s, and π_θ is differentiable at $\theta^\star$. For a non-empirical state distribution, additionally assume that differentiation and expectation can be interchanged. Then*

$$\mathcal{L}_d(\pi_{\theta^\star}; r) = 0 \qquad \textit{and} \qquad \nabla_\theta \mathcal{L}_d(\pi_\theta; r)\big|_{\theta = \theta^\star} = 0.$$

Proof. The first statement follows from equality of the two distributions. For a fixed state, differentiating the KL divergence at $\pi_{\theta^\star} = T_r$ gives

$$\begin{aligned}\nabla_\theta D_{\mathrm{KL}}(\pi_\theta \,\|\, T_r)\big|_{\theta = \theta^\star} &= \sum_a \nabla_\theta \pi_{\theta^\star}(a \mid s) \left(\log \frac{\pi_{\theta^\star}(a \mid s)}{T_r(a \mid s)} + 1\right) \\ &= \nabla_\theta \sum_a \pi_{\theta^\star}(a \mid s) = 0.\end{aligned}$$

Taking the expectation over fixed cached states preserves the equality. □

Corollary A.3 also precisely states the connection to the online update at initialization. If $\pi_{\theta_0} = \pi_b$, then the online state distribution and the distribution used to generate the cache coincide at θ_0. Hence, in expectation over cache construction and when sampled states are treated as fixed during the actor update, gradient descent on the Tilted-Target loss and gradient ascent on the zero-discount DOPD surrogate have the same expected per-state update direction at that point. A particular finite cache retains ordinary sampling error. The statement also does not extend to later online state distributions once π_θ departs from π_b.

Why the cached sampled-KL surrogate lacks this guarantee. The sampled KL estimator in Eq. 4 is $g(\ell) = \exp(\ell) - 1 - \ell$, where $\ell(a) = \log b_s(a) - \log p(a)$. For a strictly positive p, if $a \sim p$, then

$$\mathbb{E}_{a\sim p}[g(\ell(a))] = \sum_a p(a) \left[\frac{b_s(a)}{p(a)} - 1 - \log \frac{b_s(a)}{p(a)} \right] = D_{\mathrm{KL}}(p \,\|\, b_s). \tag{21}$$

For a cached action $a_b \sim b_s$, however, its population expectation is

$$\widetilde{K}_{b_s}(p) = \sum_a b_s(a) \left[\frac{b_s(a)}{p(a)} - 1 - \log \frac{b_s(a)}{p(a)} \right], \tag{22}$$

which is generally not $D_{\mathrm{KL}}(p \,\|\, b_s)$. Therefore the identity in Lemma A.1 does not apply to the expected cached sampled-KL objective away from $p = b_s$.

For a concrete counterexample, take two actions and set $\alpha = 1$, $b_s = \pi^- = (1/2, 1/2)$, and $\pi^+ = (3/4, 1/4)$. This anchor pair induces $r = (\log(3/2), \log(1/2))$, and the exact tilted target is $T_r = (3/4, 1/4)$. Parameterizing $p = (x, 1-x)$, direct differentiation of Eq. 22 gives

$$\frac{\mathrm{d}}{\mathrm{d}x} \widetilde{K}_{b_s}(x, 1-x) = \frac{1}{2} \frac{x - 1/2}{x^2} - \frac{1}{2} \frac{(1-x) - 1/2}{(1-x)^2},$$

and therefore

$$\frac{\mathrm{d}}{\mathrm{d}x} \widetilde{K}_{b_s}(x, 1-x) \bigg|_{x=3/4} = \frac{20}{9}.$$

Thus the derivative of $\Phi_s^{\mathrm{cached}}(p; r) = \langle p, r \rangle - \alpha \widetilde{K}_{b_s}(p)$ at the exact target is $\log 3 - 20/9 \neq 0$. The intended tilted target is not even a stationary point in this example. This establishes a lack of a general fixed-point guarantee; it does not assert that every finite run of the naive surrogate must fail.

A.3 Lightning Weave: Joint Targets for Capability Composition

For K anchor pairs, let $\mathbf{w} = (w_1, \ldots, w_K)$ with $w_i \geq 0$, and define the joint score

$$r_{\mathbf{w}}(a \mid s) = \sum_{i=1}^K w_i r_i(a \mid s).$$

Proposition A.5 (Unique multi-anchor target)**.** *For every fixed state s, the unique solution to*

$$\max_{p \in \mathcal{P}(\mathcal{A})} \left\{ \sum_{i=1}^K w_i \mathbb{E}_{a\sim p}[r_i(a \mid s)] - \alpha D_{\mathrm{KL}}(p \,\|\, b_s) \right\} \tag{23}$$

is

$$q_{\mathbf{w}}(a \mid s) = \frac{b_s(a) \exp\left(\frac{1}{\alpha} \sum_{i=1}^K w_i r_i(a \mid s) \right)}{Z_{\mathbf{w}}(s)}, \tag{24}$$

where

$$Z_{\mathbf{w}}(s) = \sum_a b_s(a) \exp\left(\frac{1}{\alpha} \sum_{i=1}^K w_i r_i(a \mid s) \right).$$

If every score satisfies Eq. 15, then

$$q_{\mathbf{w}}(a \mid s) = \frac{b_s(a)}{Z_{\mathbf{w}}(s)} \prod_{i=1}^K \left(\frac{\pi_i^+(a \mid s)}{\pi_i^-(a \mid s)} \right)^{w_i/\alpha}. \tag{25}$$

Proof. Linearity of expectation makes Eq. 23 equal to $\Phi_s(p; r_{\mathbf{w}})$. Proposition A.2, applied to the finite score $r_{\mathbf{w}}$, gives the unique solution in Eq. 24. Under Eq. 15,

$$\exp\left(\frac{1}{\alpha}\sum_i w_i r_i(a \mid s)\right) = \exp\left(\sum_i \frac{w_i}{\alpha}\log\frac{\pi_i^+(a \mid s)}{\pi_i^-(a \mid s)}\right) = \prod_i \left(\frac{\pi_i^+(a \mid s)}{\pi_i^-(a \mid s)}\right)^{w_i/\alpha},$$

which proves Eq. 25. □

Define the fixed-state-distribution multi-anchor objective

$$\mathcal{J}_{\mathrm{joint},d}(\pi; \mathbf{w}) = \mathbb{E}_{s\sim d_{\pi_b}}\left[\sum_{i=1}^K w_i \mathbb{E}_{a\sim\pi(\cdot|s)}[r_i(a \mid s)] - \alpha D_{\mathrm{KL}}\big(\pi(\cdot \mid s) \,\|\, b_s\big)\right]. \tag{26}$$

Corollary A.6 (Lightning Weave objective equivalence)**.** *For every policy π,*

$$\alpha\mathbb{E}_{s\sim d_{\pi_b}}\left[D_{\mathrm{KL}}\big(\pi(\cdot \mid s) \,\|\, q_{\mathbf{w}}(\cdot \mid s)\big)\right] = -\mathcal{J}_{\mathrm{joint},d}(\pi; \mathbf{w}) + \alpha\mathbb{E}_{s\sim d_{\pi_b}}[\log Z_{\mathbf{w}}(s)]. \tag{27}$$

Hence the Lightning Weave loss in Eq. 11 is exactly the negative joint regularized objective on the fixed cached states, up to a constant independent of the student policy. This equivalence holds over any common policy class.

Proof. Apply Lemma A.1 with $r = r_{\mathbf{w}}$ and take the expectation over d_{π_b}. □

Corollary A.7 (Reduction to Tilted-Target DOPD)**.** *If $K = 1$ and $w_1 = 1$, then $r_{\mathbf{w}} = r_1$, $q_{\mathbf{w}} = T_{r_1}$, and Eq. 27 reduces exactly to Corollary A.3. If all $w_i = 0$, then $q_{\mathbf{w}} = b_s$.*

Proof. Both statements follow by substitution into Eq. 24. □

A.4 Structural Properties of the Joint Target

Proposition A.8 (Pairwise-odds decomposition)**.** *For any two actions $a, a' \in \mathcal{A}$,*

$$\log\frac{q_{\mathbf{w}}(a \mid s)}{q_{\mathbf{w}}(a' \mid s)} = \log\frac{b_s(a)}{b_s(a')} + \frac{1}{\alpha}\sum_{i=1}^K w_i\left[r_i(a \mid s) - r_i(a' \mid s)\right]. \tag{28}$$

Proof. Take the log-ratio of Eq. 24 for a and a'. The shared normalizer $Z_{\mathbf{w}}(s)$ cancels. □

Equation 28 gives a precise interpretation of local agreement and conflict. If all positively weighted anchors increase the score of a relative to a', then the joint target increases the corresponding odds relative to the behavior policy. If the anchors disagree, the signed weighted sum—rather than any one anchor or an ordering of anchors—determines the change in odds.

Corollary A.9 (Permutation, baseline, and scale properties)**.** *The joint target is invariant to any simultaneous permutation of the anchor scores and their weights. It is also invariant to replacing each score with $r_i(a \mid s) + c_i(s)$ for any action-independent state baseline $c_i(s)$. Moreover, it depends on $\mathbf{w}$ and α only through the ratios w_i/α. In particular, for every $c > 0$,*

$$q_{c\mathbf{w}}^{(\alpha)} = q_{\mathbf{w}}^{(\alpha/c)}, \tag{29}$$

where the superscript denotes the KL coefficient used to construct the target.

Proof. Permutation invariance follows from commutativity of addition. Adding the state baselines multiplies every unnormalized target probability by the same factor $\exp(\sum_i w_i c_i(s)/\alpha)$, which cancels in the normalizer. Finally, Eq. 24 depends on the weights and KL coefficient only through $\sum_i (w_i/\alpha) r_i$. □

Remark A.10 (Joint target versus sequential training). Corollary A.9 concerns the explicitly constructed distribution $q_{\mathbf{w}}$ at a fixed state. It does not imply that sequentially training a parameterized model on separate anchor targets is order invariant: different stages can change the model, the visited states, and the approximation error before the next stage begins.

Remark A.11 (Fixed point of the finite-candidate surrogate). The implementation uses the squared log-residual loss in Eq. 32, rather than evaluating the full-distribution KL directly. At a fixed cached state, suppose $\widehat{b}$, $\widehat{q}$, and $\widehat{\pi}_\theta$ are strictly positive on the candidate-plus-residual outcome space, $m_b(s) > 0$ is fixed, and the numerical clamps are inactive. This loss is a positively weighted sum of squared log residuals, so it is non-negative and equals zero if and only if $\widehat{\pi}_\theta = \widehat{q}$. If $\widehat{\pi}_\theta$ is differentiable, the loss gradient with respect to θ also vanishes at that target, since every residual is zero. This applies to both single-anchor and composed finite targets. Thus, the surrogate preserves the zero-loss, zero-gradient property at its finite target, but does not inherit the full-distribution KL objective equivalence established above.

Scope of the guarantees. The propositions establish exact target construction and objective equivalence for finite aligned scores, a full action distribution, and the fixed cached state distribution. They do not guarantee that a finite parameterization represents every target exactly, that an optimizer reaches the best point in that parameterization, or that cached states cover states visited after a large policy change. They also do not by themselves imply an improvement in task accuracy or response length; those are empirical properties of the selected anchor shifts. Finally, finite-support scoring and cross-tokenizer alignment introduce practical approximations to the full-distribution setup analyzed here; Appendix B.4 specifies those choices.

B Supplementary Experimental Details

This section specifies the models, data, optimization, score alignment, and evaluation protocols used in our experiments. The method in Section 3 is stated over a common action space and full distributions; below we distinguish this idealized definition from the finite-candidate implementation used to cache policy shifts.

B.1 Models, Anchor Pairs, and Training Data

Models and anchors. We conduct experiments with Qwen3-1.7B, Qwen3-4B, Qwen3-4B-Thinking-2507, Qwen3.5-4B, and OLMo-3-7B-Think as student models. We use three anchor pairs: Qwen3-8B-Base $\rightarrow$ Klear-Reasoner-8B (Klear), DeepSeek-R1-Distill-Qwen-1.5B $\rightarrow$ DECS-1.5B (DECS), and MiMo-7B-Base $\rightarrow$ MiMo-7B-RL-0530 (MiMo-RL). Klear and MiMo-RL provide accuracy-oriented shifts, while DECS provides an efficiency-oriented shift.

Mathematics training data. We select 3,200 prompts from the mathematics split of Skywork-OR1-RL-Data (He et al., 2025) and convert them to the DAPO prompt format (Yu et al., 2025). Prompts exceeding the student context limit are discarded.

Code training data. We select 3,200 prompts from KlearReasoner-CodeSub-15K (Su et al., 2026) after length filtering and prompt deduplication. We additionally screen the selected data against LiveCodeBench v6 and find no overlapping problems.

Behavior trajectories. For each student and domain, we sample four responses per prompt from the initial student π_b, using temperature 1, top-$p = 1$, and a maximum of 2,048 response tokens. This produces 12,800 trajectories. All anchors score the same cached student trajectories, which are subsequently reused throughout training.

B.2 Training Hyperparameters

Single- and multi-anchor runs share the settings in Table 5. Each run replays 12,800 cached trajectories for two epochs: 100 rounds of 256 trajectories, with four optimizer updates per round at a global batch size of 64 trajectories (400 updates in total). Mathematics and code checkpoints are trained separately on their corresponding datasets.

Table 5: Shared training hyperparameters for single- and multi-anchor configurations.

Hyperparameter	**Value**	**Hyperparameter**	**Value**
Replay rounds	100	Global batch size	64
Cached trajectories per round	256	Learning rate	1.0×10^{-6}
Training epochs	2	LR schedule	Constant
Maximum response length	2,048	Optimizer	Adam
Rollout temperature	1.0	Adam (β_1, β_2)	$(0.9, 0.999)$
Rollout top-p	1.0	Weight decay	0.01
α	2.0	Gradient clipping	1.0

We use $\alpha = 2.0$ for all single- and multi-anchor runs. Multi-anchor weights are normalized to sum to one, with $w_i = 1/K$ for equal composition of K anchors. Consequently, a composition endpoint with one weight equal to one uses the same target and training configuration as the corresponding single-anchor run.

B.3 Training Cost

We compare online and offline costs in four mathematics settings: Qwen3-1.7B with two anchors and Qwen3-4B with one, two, or three anchors. Runs use 100 rounds of 256 trajectories (64 prompts $\times$ four responses), capped at 2,048 tokens. Offline training replays 12,800 unique cached trajectories for two epochs (25,600 uses). All GPU stages use eight H100 GPUs.

For the four Qwen3 settings, Lightning Weave reduces measured GPU-hour cost per composition by 1.70–$2.18\times$ (Table 6). Both pipelines score each anchor pair, so this reduction need not grow with anchor count. More importantly, Lightning Weave avoids concurrent anchor serving during student training: Online DOPD keeps all $2K$ anchor policies in the training loop, whereas Lightning Weave scores pairs sequentially before student-only training.

Reusing cached trajectories, student-reference scores, and anchor shifts across weight configurations makes additional compositions student-only GPU training runs. Using the Qwen3-4B three-anchor costs, we project five compositions at $9.07 + 5 \times 2.48 = 21.47$ GPU hours with Lightning Weave, compared with $5 \times 19.66 = 98.30$ GPU hours online: a $4.58\times$ amortized cost reduction, assuming unchanged training cost per composition.

B.4 Cross-Tokenizer Policy-Shift Alignment

Some students and anchors have different tokenizers, so a student action need not be an atomic action under an anchor. We align decisions through the serialized byte-level token strings, which define a tokenizer-independent view of the text prefix. For a generated student prefix s_t, we first losslessly project the entire observed prefix into each anchor tokenizer. Non-atomic student tokens may decompose into several anchor tokens for this context construction. Added tokens are accepted only when decoding and re-encoding preserves their text exactly.

Table 6: GPU-hour costs for one composition in each of four 100-round settings. CPU target construction is excluded; totals use unrounded stage costs.

Student	Qwen3-1.7B	Qwen3-4B		
Number of anchors	2	1	2	3
Online DOPD	15.65	15.49	17.64	19.66
Lightning Weave	**7.17**	**8.31**	**9.58**	**11.55**
Online/offline cost ratio	$2.18\times$	$1.86\times$	$1.84\times$	$1.70\times$
Lightning Weave breakdown				
Student rollout collection	1.59	3.50	3.50	3.50
Student-reference scoring	0.49	0.62	0.62	0.62
Anchor scoring	2.93	1.76	2.93	4.95
Student-only training	2.17	2.43	2.53	2.48

For a candidate student action a, let $\phi_i(a)$ denote its representation under anchor i. We retain the position for anchor i only if every cached student candidate maps atomically, i.e., $\phi_i(a)$ is exactly one anchor token for all 16 candidates. Its score is then evaluated at the anchor boundary immediately preceding that token:

$$\widehat{r}_i(a \mid s_t) = \log \pi_i^+(\phi_i(a) \mid \phi_i(s_t)) - \log \pi_i^-(\phi_i(a) \mid \phi_i(s_t)) \,. \tag{30}$$

This rule deliberately masks a boundary at which a candidate expands into multiple anchor tokens; it does not substitute the likelihood of the first piece, whose meaning would depend on future pieces. It also ensures that the pre- and post-anchor likelihoods are conditioned on exactly the same text prefix. For a multi-anchor target, we take the logical intersection of the anchor masks and sum the valid shifts at the corresponding student decision, as in Eq. 8. A masked position is excluded from both the loss and its token normalization; there is no fallback score. Across the Klear–DECS experiments in the main table, 93.8–100% of generated token positions survive this test, and every cached trajectory contains at least one valid position.

Finite-candidate target. The full-vocabulary target in Eq. 10 is the conceptual objective. In the implementation, we preserve the behavior probability of the 16 cached student candidates and aggregate all remaining vocabulary mass into one *other* outcome. Candidate probabilities are gathered from full-vocabulary-normalized logits; they are not renormalized within the top 16. For the single-anchor case, the cached target over $\mathcal{C}(s) \cup \{\text{other}\}$ is

$$\begin{aligned} \widehat{q}(a \mid s) &\propto \pi_b(a \mid s) \exp(\widehat{r}(a \mid s)/\alpha) \,, && a \in \mathcal{C}(s), \\ \widehat{q}(\text{other} \mid s) &\propto 1 - \sum_{a \in \mathcal{C}(s)} \pi_b(a \mid s), \end{aligned} \tag{31}$$

where the unobserved residual is assigned zero shift. For multiple anchors, $\widehat{r}$ is replaced by $\sum_i w_i \widehat{r}_i$ after intersecting the validity masks. Retaining the residual outcome avoids treating the cached top-16 set as the complete vocabulary and makes the approximation exact when all non-candidate actions have zero composed shift.

We fit this finite target with a squared log-residual surrogate. Let $\widehat{b}$ and $\widehat{\pi}_\theta$ denote the behavior and current-student distributions over the 17 outcomes, and let $m_b(s) = \sum_{a \in \mathcal{C}(s)} \pi_b(a \mid s)$ be the behavior probability mass covered by the cached candidates. The implemented per-state loss is

$$\widehat{\mathcal{L}}_{\mathrm{TT}}(s) = \frac{\alpha}{2 m_b(s)} \sum_{z \in \mathcal{C}(s) \cup \{\text{other}\}} \widehat{b}(z \mid s) \left[\log \widehat{\pi}_\theta(z \mid s) - \log \widehat{q}(z \mid s)\right]^2 . \tag{32}$$

We clamp residual masses below 10^{-8} and log arguments below 10^{-30} for numerical stability. Equation 32 is a finite-support surrogate for, rather than a numerical evaluation of, the full-vocabulary KL in Eq. 11. It preserves the desired fixed point because its value and gradient vanish at $\widehat{\pi}_\theta = \widehat{q}$. The division by $m_b(s)$ additionally makes its initialization gradient match the candidate-renormalized Direct-OPD surrogate used to define the cached update.

B.5 Benchmarks and Test Sets

Mathematics. We evaluate on AIME 2024, AIME 2025, and HMMT February 2025. Each benchmark contains 30 competition-level mathematics problems covering topics such as algebra, geometry, combinatorics, and number theory.

Code. We evaluate code generation on LiveCodeBench (Jain et al., 2025), which contains recently released competitive-programming problems and reduces the risk of test-set contamination. Following the official release filters, LCB v5 and v6 contain 279 and 131 problems, respectively. All methods are evaluated on the same problem sets.

B.6 Evaluation Prompts and Answer Extraction

Mathematics prompt. Before application of the model's native chat template, each mathematics example is represented exactly as

```
Question: {Problem}
Answer:
```

We enable the model's native reasoning mode where available and stop on its end-of-sequence or end-of-turn token. For every problem we independently sample 64 responses at temperature 0.6 and top-$p = 0.95$, allowing at most 32,768 generated tokens. We extract the last balanced `\boxed{...}` expression, remove superficial formatting such as whitespace, delimiters, and units, and canonicalize integer answers before exact comparison with the reference. We do not use a computer-algebra system to grant additional symbolic equivalences. A length-truncated response is still scored if it contains a valid extracted answer.

LiveCodeBench prompt. We use LiveCodeBench's `CodeQwenInstruct` generation format. Its user message begins with:

```
You will be given a question (problem specification) and
will generate a correct Python program that matches the
specification and passes all tests. You will NOT return
anything except for the program.
Question: {question_content}
```

For problems with starter code, the message then asks the model to complete the supplied code and enclose the answer in code delimiters. Otherwise it instructs the model to read from standard input, write to standard output, and return the program inside a Python code block initialized with `# YOUR CODE HERE`. The official system wrapper is `You are a helpful assistant.`, expressed with the Qwen instruction delimiters. We sample four responses per problem at temperature 0.6 and top-$p = 0.95$, with a maximum of 40,960 generated tokens.

We use LiveCodeBench's official code extraction and test execution. A sample is correct only if its extracted program passes every test for that problem. Tests run in isolated, read-only containers with the benchmark's fast-test mode and a six-second timeout per test. Runtime errors, timeouts, extraction failures, and incomplete programs are scored as incorrect.

B.7 Metrics and Aggregation

Let $c_{j,r} \in \{0, 1\}$ indicate whether response r to benchmark problem j is correct. For a benchmark with N problems and R samples per problem, we report

$$\mathrm{Acc} = \frac{100}{NR} \sum_{j=1}^{N} \sum_{r=1}^{R} c_{j,r}. \tag{33}$$

Here $R = 64$ for mathematics and $R = 4$ for LiveCodeBench. Code accuracy is therefore an average over four generations (Avg@4), not pass@4: a problem with one successful sample contributes $1/4$, rather than being counted as fully solved. Mean response length is computed over the same NR samples using the evaluated student's tokenizer and counts generated tokens only.

The Average accuracy and response-token columns are unweighted arithmetic means of the five benchmark-level values. Following O1-Pruner (Luo et al., 2026b), AES compares a trained policy with its corresponding base student. We compute the score separately for each benchmark before averaging. For benchmark k, let

$$\Delta_{L,k} = \frac{L_{\mathrm{base},k} - L_k}{L_{\mathrm{base},k}}, \qquad \Delta_{A,k} = \frac{A_k - A_{\mathrm{base},k}}{A_{\mathrm{base},k}}, \tag{34}$$

where A_k and L_k are the policy's accuracy and mean response length, and $A_{\mathrm{base},k}$ and $L_{\mathrm{base},k}$ are those of its corresponding base student under the same evaluation protocol. The reported AES is the unweighted mean of the five benchmark-level scores:

$$\mathrm{AES} = \frac{1}{5} \sum_{k=1}^{5} \left[\begin{cases} \Delta_{L,k} + 3|\Delta_{A,k}|, & \Delta_{A,k} \geq 0, \\ \Delta_{L,k} - 5|\Delta_{A,k}|, & \Delta_{A,k} < 0. \end{cases} \right] \tag{35}$$

Thus, AES rewards both accuracy gains and token savings, while penalizing an accuracy loss more strongly than an equal relative gain.

B.8 Implementation Details

We implement our method in Slime. Qwen models are trained with Megatron-Core, while OLMo is trained with PyTorch FSDP. All of our training runs use bfloat16 precision on a single eight-GPU node. We use seed 42 for behavior generation and seed 1234 for training, and report the final checkpoint of each run. Each configuration is trained once; the repeated generations used for evaluation measure decoding variability rather than training-seed variance.

C Additional Experimental Results

We provide additional results on the accuracy–efficiency trade-off and anchor generalization, including the five-point Qwen3-4B composition sweep and MiMo-RL compositions on Qwen3-1.7B and Qwen3.5-4B.

C.1 Klear–DECS Operating Points

Table 7: Qwen3-4B Klear–DECS weight sweep across mathematics and code. We set $w_{\mathrm{DECS}} = \rho_{\mathrm{DECS}}$ and $w_{\mathrm{Klear}} = 1 - \rho_{\mathrm{DECS}}$, so the capability weights sum to one. Mathematics uses Avg@64 and code uses Avg@4.

ρ_{DECS}	AIME 2024		AIME 2025		HMMT 2025		LCB v5		LCB v6	
	Acc.↑	#Tok.↓	Acc.↑	#Tok.↓	Acc.↑	#Tok.↓	Acc.↑	#Tok.↓	Acc.↑	#Tok.↓
0.250	78.8	14,466	74.3	17,236	48.8	17,420	59.1	13,165	52.9	13,719
0.375	77.4	12,998	73.2	15,317	48.7	15,372	59.6	12,406	50.8	12,652
0.500	76.0	11,521	70.1	13,816	43.0	13,743	59.2	11,702	51.3	12,357
0.625	74.2	10,374	66.1	12,328	38.8	12,207	57.8	11,036	49.4	11,585
0.750	70.0	9,566	62.3	11,131	34.7	10,595	55.6	10,705	46.9	11,284

Table 7 reports the five standardized composition fractions for the Qwen3-4B sweep, presenting mathematics and code in a single view. Increasing ρ_{DECS} generally shortens responses, while lower and intermediate fractions preserve higher accuracy. The consistent movement across benchmarks shows that the composition fraction provides a controllable accuracy–efficiency axis across student policies.

C.2 Generalization with MiMo-RL

Table 8: Additional anchor-composition results on Qwen3-1.7B and Qwen3.5-4B. We report accuracy (Acc.; %) and mean response tokens (#Tok.). Mathematics uses Avg@64, while LCB results marked with * use Pass@1. Within each student block, the best and second-best results are marked in **bold** and underlined, respectively.

Anchors	AIME 2024		AIME 2025		HMMT 2025		LCB v5*		LCB v6*		Average		
	Acc.↑	#Tok.↓	Acc.↑	#Tok.↓	Acc.↑	#Tok.↓	Acc.↑	#Tok.↓	Acc.↑	#Tok.↓	Acc.↑	#Tok.↓	AES↑
Qwen3-1.7B													
Base	45.8	17,564	40.4	17,537	21.7	17,570	36.9	14,663	28.2	14,868	34.62	16,440	0.00
Klear-only	53.2	18,457	41.7	19,178	24.1	19,751	36.6	15,206	32.8	15,288	37.68	17,576	0.20
DECS-only	46.2	**14,558**	34.9	**14,534**	20.9	**14,160**	31.9	**13,518**	31.3	**13,458**	33.05	**14,046**	−0.08
MiMo-RL	51.8	19,352	38.8	20,739	23.8	19,927	36.6	15,849	29.8	15,882	36.14	18,350	0.02
Klear+DECS	55.1	15,289	40.8	16,151	22.9	15,855	38.4	13,963	32.8	13,870	38.00	15,026	0.38
Klear+MiMo-RL	**60.2**	22,004	**47.0**	23,792	**30.0**	24,171	**42.7**	17,568	**35.1**	17,798	**42.99**	21,067	**0.44**
DECS+MiMo-RL	53.5	16,035	37.6	16,348	23.5	16,021	38.4	14,175	30.5	13,627	36.70	15,241	0.25
Qwen3.5-4B													
Base	72.9	18,316	63.5	20,322	59.2	26,481	41.9	27,209	36.6	26,500	54.84	23,766	0.00
Klear-only	78.2	21,522	66.7	23,346	56.7	27,096	50.9	24,951	45.0	26,200	59.49	24,623	0.22
DECS-only	64.2	15,052	55.8	17,335	52.1	22,228	45.9	**22,570**	38.9	**23,495**	51.38	20,136	−0.16
MiMo-RL	80.4	20,770	68.5	21,975	58.8	25,490	40.1	26,653	37.4	27,738	57.04	24,525	0.09
Klear+DECS	**84.2**	18,900	**74.6**	20,757	**64.0**	23,635	**57.0**	24,404	**52.7**	25,665	**66.47**	22,672	**0.68**
Klear+MiMo-RL	78.8	**12,789**	68.9	**14,496**	63.6	**15,874**	54.1	25,628	46.6	26,243	62.40	**19,006**	0.61
DECS+MiMo-RL	78.3	13,314	68.5	14,931	62.5	18,248	53.4	24,374	47.3	24,936	62.01	19,161	0.59

Table 8 extends the MiMo-RL compositions in Table 3 to two additional students. On Qwen3-1.7B, Klear+MiMo-RL achieves the highest average accuracy and AES, while DECS+MiMo-RL im-

proves average accuracy over the base model by 2.08 points with 7.3% fewer tokens. On Qwen3.5-4B, Klear+MiMo-RL and DECS+MiMo-RL improve average accuracy by 7.56 and 7.17 points while reducing response tokens by 20.0% and 19.4%, respectively. These results demonstrate that capability composition with MiMo-RL transfers across student sizes and anchor pairings.

D CASE STUDIES

Aggregate metrics show the overall accuracy–efficiency trade-off, but do not reveal how different anchor shifts change an individual response. Following the qualitative-example format used in prior reasoning-efficiency work (Jiang et al., 2026; Luo et al., 2026b), each case below foregrounds the question and matched policy responses in a single panel. We select the mathematics cases from the shared Qwen3-4B AIME 2024 evaluation and the code case from the corresponding LCB v5 evaluation, using fixed correctness and length criteria before inspecting the response text. Each panel reproduces the beginning and decisive ending of the sampled response, starting from `<think>`. The model's full response length appears in the header, and the bracketed omission marker reports the exact full-response length under the student tokenizer. We normalize whitespace and mathematical typesetting only. These examples illustrate the aggregate trends rather than establish causal effects.

D.1 COMBINING COMPLEMENTARY ACCURACY SIGNALS

CASE A **MiMo-RL supplies the correct behavior** **AIME 2024 I-5, Sample 22**

Question. Rectangles $ABCD$ and $EFGH$ satisfy that D, E, C, F are collinear and A, D, H, G are concyclic. Given $BC = 16$, $AB = 107$, $FG = 17$, and $EF = 184$, find CE. **Reference: 104**

Klear-only **Incorrect: 107** **29,849 tokens**

<think> Okay, so I need to solve this geometry problem. Let me read it again carefully. We have two rectangles, $ABCD$ and $EFGH$ … *[middle omitted; full response: 29,849 tokens]*

Then $CE \approx |199 - 92.092| = 106.908$. This is very close to 107, and the intended answer is likely $\boxed{107}$.

MiMo-RL **Correct: 104** **14,535 tokens**

<think> Okay, let me try to figure out this geometry problem. So, we have two rectangles, $ABCD$ and $EFGH$ … *[middle omitted; full response: 14,535 tokens]*

The problem assumes that the points are ordered as D, E, C, F. Therefore, we take the case where $e = 3$, which gives $\boxed{104}$.

Klear+MiMo-RL **Correct: 104** **15,659 tokens**

<think> Okay, so I need to solve this geometry problem. Let me read it again carefully. We have two rectangles, $ABCD$ and $EFGH$ … *[middle omitted; full response: 15,659 tokens]*

We must have $E = (3, 0)$ and $F = (187, 0)$, so that $0 < 3 < 107 < 187$. Therefore, $CE = |107 - 3| = 104$. The four points satisfy the circle equation. **Final Answer:** $\boxed{104}$.

CASE B **Klear-only supplies the correct behavior** **AIME 2024 I-13, Sample 10**

Question. Let p be the least prime for which p^2 divides $n^4 + 1$ for some positive integer n. Find the least positive m for which p^2 divides $m^4 + 1$. **Reference: 110**

Klear-only **Correct: 110** **15,507 tokens**

<think> Okay, so I need to find the least prime number p such that there's a positive integer n where $n^4 + 1$ is divisible by p^2 … *[middle omitted; full response: 15,507 tokens]*

$m = 8 + 17 \cdot 6 = 110$. This is the smallest solution among the lifts of the four solutions modulo 17. **Final Answer:** $\boxed{110}$.

MiMo-RL **Incorrect: 134** **14,821 tokens**

<think> Okay, so I need to find the least prime number p such that there's a positive integer n where $n^4 + 1$ is divisible by p^2 … *[middle omitted; full response: 14,821 tokens]*

$m = 15 + 17 \cdot 7 = 134$. So the least positive integer m such that $m^4 + 1 \equiv 0 \pmod{17^2}$ is $\boxed{134}$.

Klear+MiMo-RL **Correct: 110** **18,549 tokens**

<think> Okay, so I need to find the least prime number p such that there's a positive integer n where $n^4 + 1$ is divisible by p^2 … *[middle omitted; full response: 18,549 tokens]*

$110^4 + 1 \equiv 0 \pmod{289}$. Since it is the smallest among the four lifts, it is the least positive integer m. **Final Answer:** $\boxed{110}$.

Figure 4: Complementary accuracy cases. MiMo-RL alone solves Case A and Klear-only alone solves Case B; Klear+MiMo-RL solves both.

Figure 4 shows complementary outcomes: MiMo-RL supplies the correct answer in Case A, whereas Klear-only does so in Case B. Klear+MiMo-RL solves both, preserving behavior contributed by either accuracy-oriented anchor.

D.2 Combining Accuracy and Efficiency

Figure 5 shows the same composition pattern across mathematics and code: Klear-only is correct but long, DECS-only is shorter but incorrect, and Klear+DECS is both correct and shortest.

CASE C **Accuracy–efficiency composition in mathematics** **AIME 2024 I-14, Sample 28**

Question. A tetrahedron has opposite edge-length pairs $(\sqrt{41}, \sqrt{41})$, $(\sqrt{80}, \sqrt{80})$, and $(\sqrt{89}, \sqrt{89})$. Its inradius is $m\sqrt{n}/p$ in reduced form. Find $m + n + p$. **Reference: 104**

Klear-only **Correct: 104** **21,323 tokens**

<think> Okay, so I need to find the distance from a point I inside the tetrahedron $ABCD$ to each of its faces ... *[middle omitted; full response: 21,323 tokens]*

$m = 20$, $n = 21$, and $p = 63$. **Final Answer:** $m + n + p = 20 + 21 + 63 = \boxed{104}$.

DECS-only **Incorrect: 125** **10,101 tokens**

<think> Okay, so I need to find the distance from a point I inside the tetrahedron $ABCD$ to each of its faces ... *[middle omitted; full response: 10,101 tokens]*

$m = 20$, $n = 42$, and $p = 63$. **Final Answer:** $m + n + p = 20 + 42 + 63 = \boxed{125}$.

Klear+DECS **Correct: 104** **7,601 tokens**

<think> Okay, so I need to solve this geometry problem about a tetrahedron. The tetrahedron is $ABCD$ with specific edge lengths ... *[middle omitted; full response: 7,601 tokens]*

The distance is $\frac{20\sqrt{21}}{63}$. This is in the required form with $m = 20$, $n = 21$, and $p = 63$. **Final Answer:** $m + n + p = 20 + 21 + 63 = \boxed{104}$.

CASE D **Accuracy–efficiency composition in code** **LCB v5, Question 3487, Sample 2**

Question: Find Maximum Removals From Source String. Given `source`, a subsequence `pattern`, and `targetIndices`, remove the maximum number of indexed characters while keeping `pattern` a subsequence. Here $n \leq 3{,}000$.

Klear-only **Correct: Pass** **17,076 tokens**

<think> Okay, let's see. The problem is about finding the maximum number of operations we can perform where each operation removes a character from `source` ... *[middle omitted; full response: 17,076 tokens]*

We use a dynamic programming approach to find the minimum cost of indices in `targetIndices` that are used in forming the pattern: `dp = [[INF] * (m + 1) for _ in range(n + 1)]; return len(targetIndices) - dp[n][m]`.

DECS-only **Incorrect: Wrong Answer** **15,726 tokens**

<think> Okay, I need to solve this problem where I have to find the maximum number of operations I can perform by removing characters from the source string ... *[middle omitted; full response: 15,726 tokens]*

But the example says 1. This suggests that the code is incorrect. ... Given the time constraints, I will proceed with the code that checks for the maximum k by removing the last k indices: `removed = set(targetIndices[-mid:])`.

Klear+DECS **Correct: Pass** **9,389 tokens**

<think> Okay, let's see. The problem is about removing characters from the source string, but only from indices in `targetIndices` ... *[middle omitted; full response: 9,389 tokens]*

The DP array `dp` is used where `dp[i]` represents the minimal cost to form the first i characters of the pattern: `dp = [INF] * (m + 1); dp[0] = 0; for j in range(m-1, -1, -1): ... return len(targetIndices) - dp[m]`.

Figure 5: Accuracy–efficiency composition in mathematics (Case C) and code (Case D). Klear+DECS retains Klear-only's correct outcome while producing the shortest response in both cases.

E Limitations and Future Work

Limitations. First, due to computational constraints, our experiments focus on models below 10B parameters, and we have not yet established whether the observed benefits persist at larger scales. Second, our method assumes access to both a post-trained model exhibiting the desired capability and its corresponding pre-anchor, so that the capability-specific policy shift can be recovered. Such matched anchor pairs may not always be available, particularly for new tasks. Third, although Lightning Weave improves the accuracy–efficiency balance, its efficiency gains remain smaller than those achieved by methods optimized exclusively for efficient reasoning.

Future work. We plan to evaluate Lightning Weave on larger models and a broader range of model architectures. We will also extend capability composition to new domains, particularly agentic reasoning and tool-use tasks.