run_poc_simulation.py

Imports

Libraries

In [1]:
```
import numpy as np
import os
import sys
sys.path.append(os.path.abspath("..."))
```

Core computation imports

In [2]:
```
from src.robotic_arm import forward_kinematics
from src.optimizer import compute_cost, compute_gradients, optimize_arm
```

Plot utilities (import as functions or call via CLI as needed)

In [3]:
```
from src.visualizations.cost_convergence_plot import plot_cost_convergence
from src.visualizations.pose_comparison_plot import plot_pose_comparison
```

Define Run Simulation

In [4]:
```
def run_simulation():
    # Initial angles
    theta1_init = np.radians(20)
    theta2_init = np.radians(10)
    # Target position
    target_x, target_y = 1.2, 1.3

    # Run optimization
    theta1_final, theta2_final, history = optimize_arm(
        theta1_init,
        theta2_init,
        target_x,
        target_y,
        learning_rate=0.1,
        iterations=50
    )

    # Extract costs for plotting
    costs = [entry[2] for entry in history]
    plot_cost_convergence(costs, title="Cost Convergence (PoC Test Run)", filename="poc_cost_convergence.png")

    # Plot arm pose comparison (initial vs. optimized)
    plot_pose_comparison(theta1_init, theta2_init, theta1_final, theta2_final, title="Pose Comparison: Initial vs. Optimized")

    # Output summary
    print(f"✅ Final Angles: θ1 = {np.degrees(theta1_final):.2f}°, θ2 = {np.degrees(theta2_final):.2f}°")
    print(f"✅ Final Cost: {costs[-1]:.4f}")
```

Main Run

In [5]:
```
if __name__ == "__main__":
    run_simulation()
```

```
Iteration 1: Cost = 0.7594
Iteration 11: Cost = 0.2074
Iteration 21: Cost = 0.2090
Iteration 31: Cost = 0.2100
Iteration 41: Cost = 0.2221
Iteration 50: Cost = 0.1451
✅ Cost convergence plot saved to: outputs\poc_cost_convergence.png
```

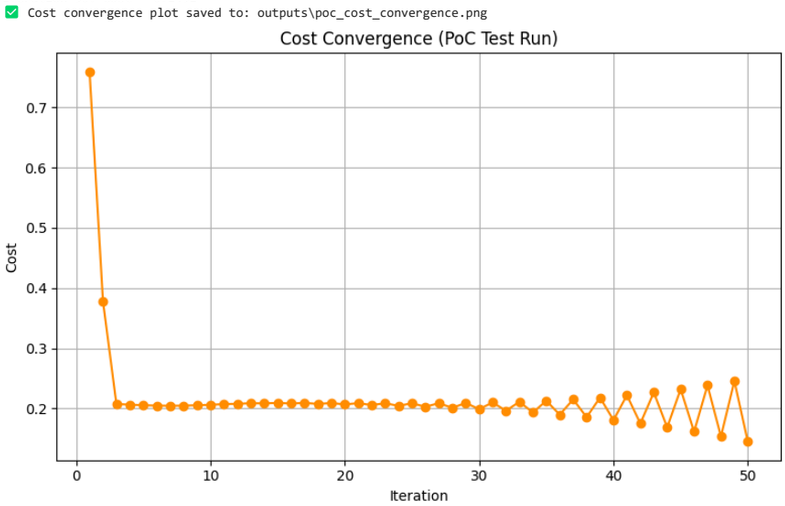


```
✅ Pose comparison plot saved to: outputs\pose_comparison_initial_vs_optimized.png
```

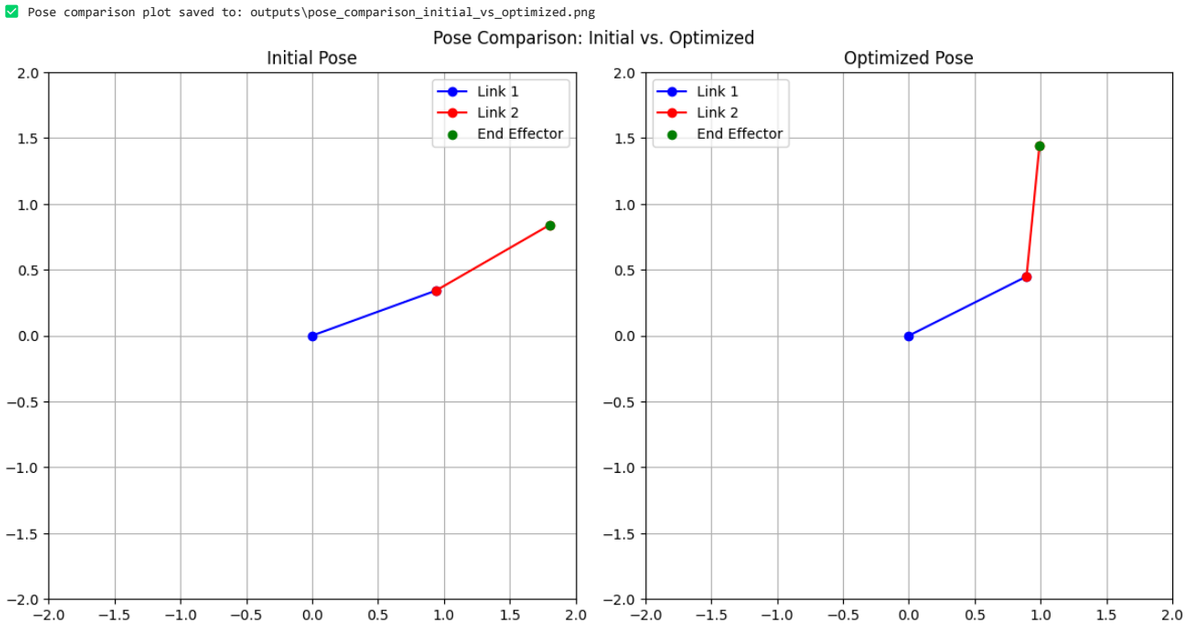


```
✅ Final Angles: θ1 = 26.70°, θ2 = 57.65°
✅ Final Cost: 0.1451
```