

Internet Protocol - IP

2017/18 Q2

Jaime Delgado

DAC – UPC

Contents

- Unit 1: IP.
- Unit 2: Other supporting protocols and services.
- Unit 3: Routing algorithms.
- Unit 4: Security.

Contents Unit 2

Other supporting protocols and services:

- ARP (Address Resolution Protocol).
- ICMP (Internet Control Message Protocol).
- DHCP (Dynamic Host Configuration Protocol).
- NAT (Network Address Translation).
- DNS (Domain Name System).

Contents Unit 2

Other supporting protocols and services:


- ARP (Address Resolution Protocol).
- ICMP (Internet Control Message Protocol).
- DHCP (Dynamic Host Configuration Protocol).
- NAT (Network Address Translation).
- **DNS (Domain Name System).**

DNS (Domain Name System)

- Application protocol needed for IP:
 - Obtain IP addresses from “names”.
- Domain/sub-domain/host name:
 - Hierarchical structure: “*myhost.ac.upc.edu*”
 - *.edu* is a TLD (Top Level Domain).
- IP of *myhost.ac.upc.edu* (node/host name) known by local **Name Server** of *ac.upc.edu*
- DNS format & protocol needed.


DNS (Domain Name System)

- Application protocol:

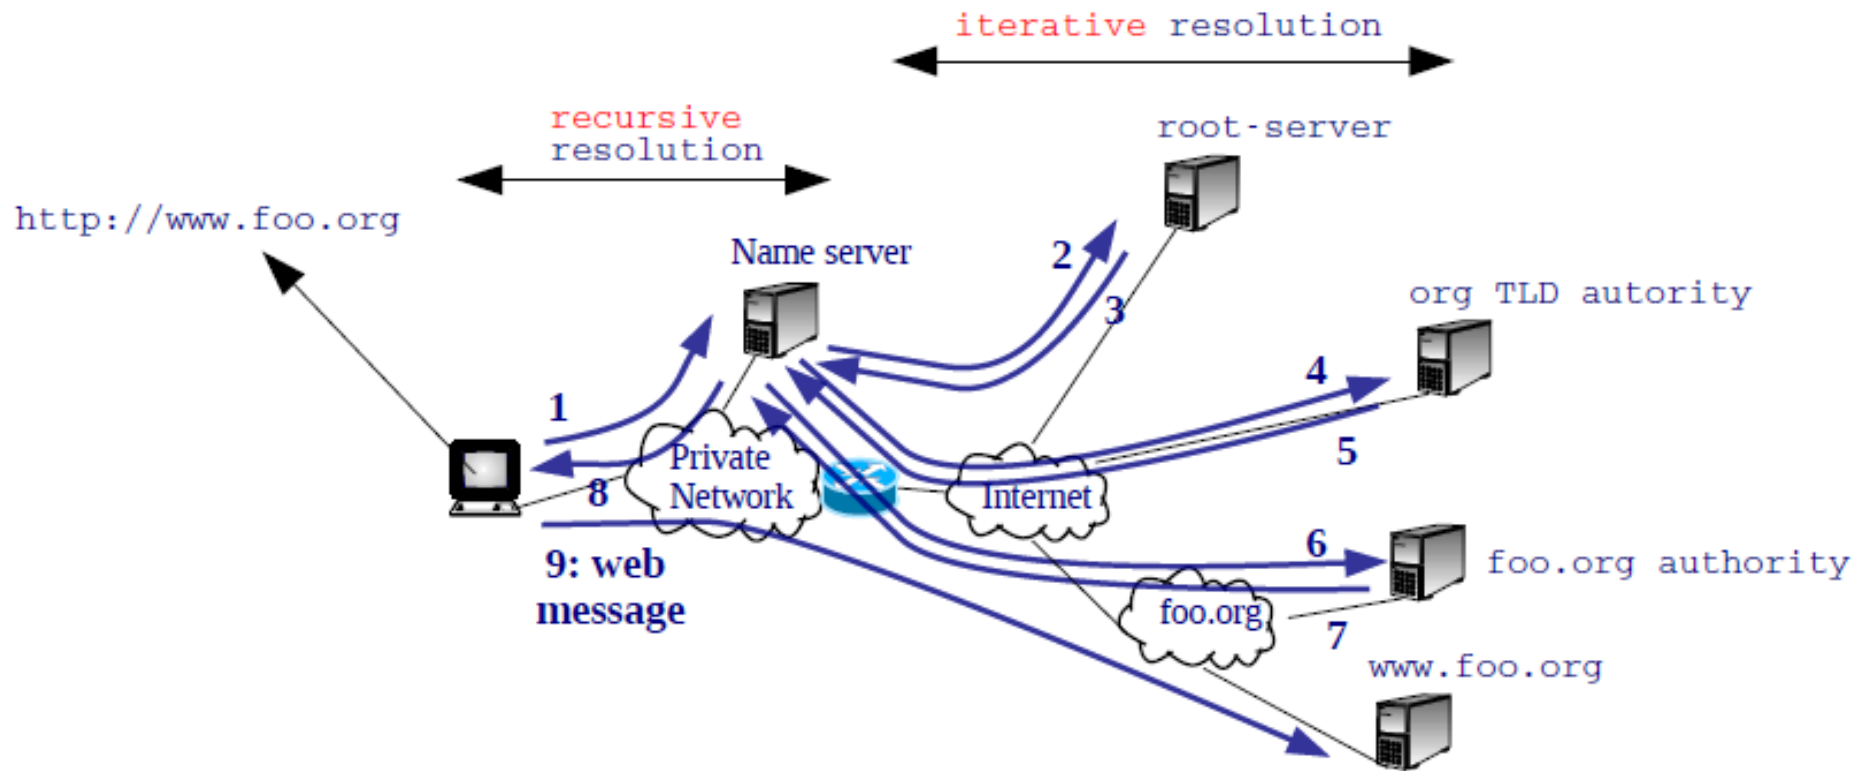


DNS (Domain Name System)

- Application protocol:

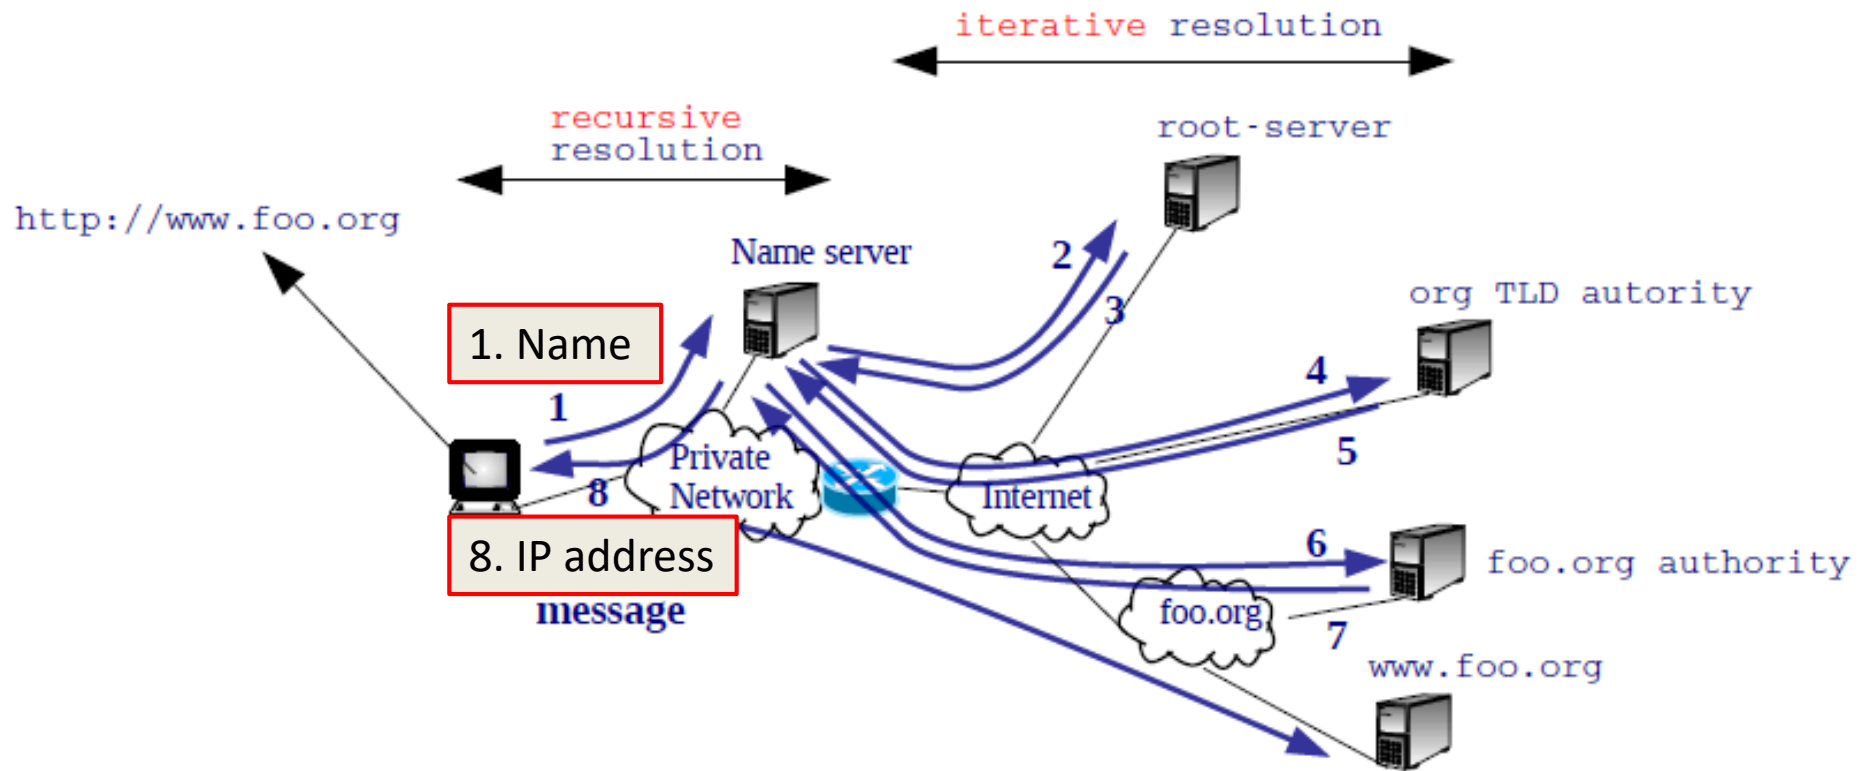

DNS (Domain Name System)

- Application protocol:

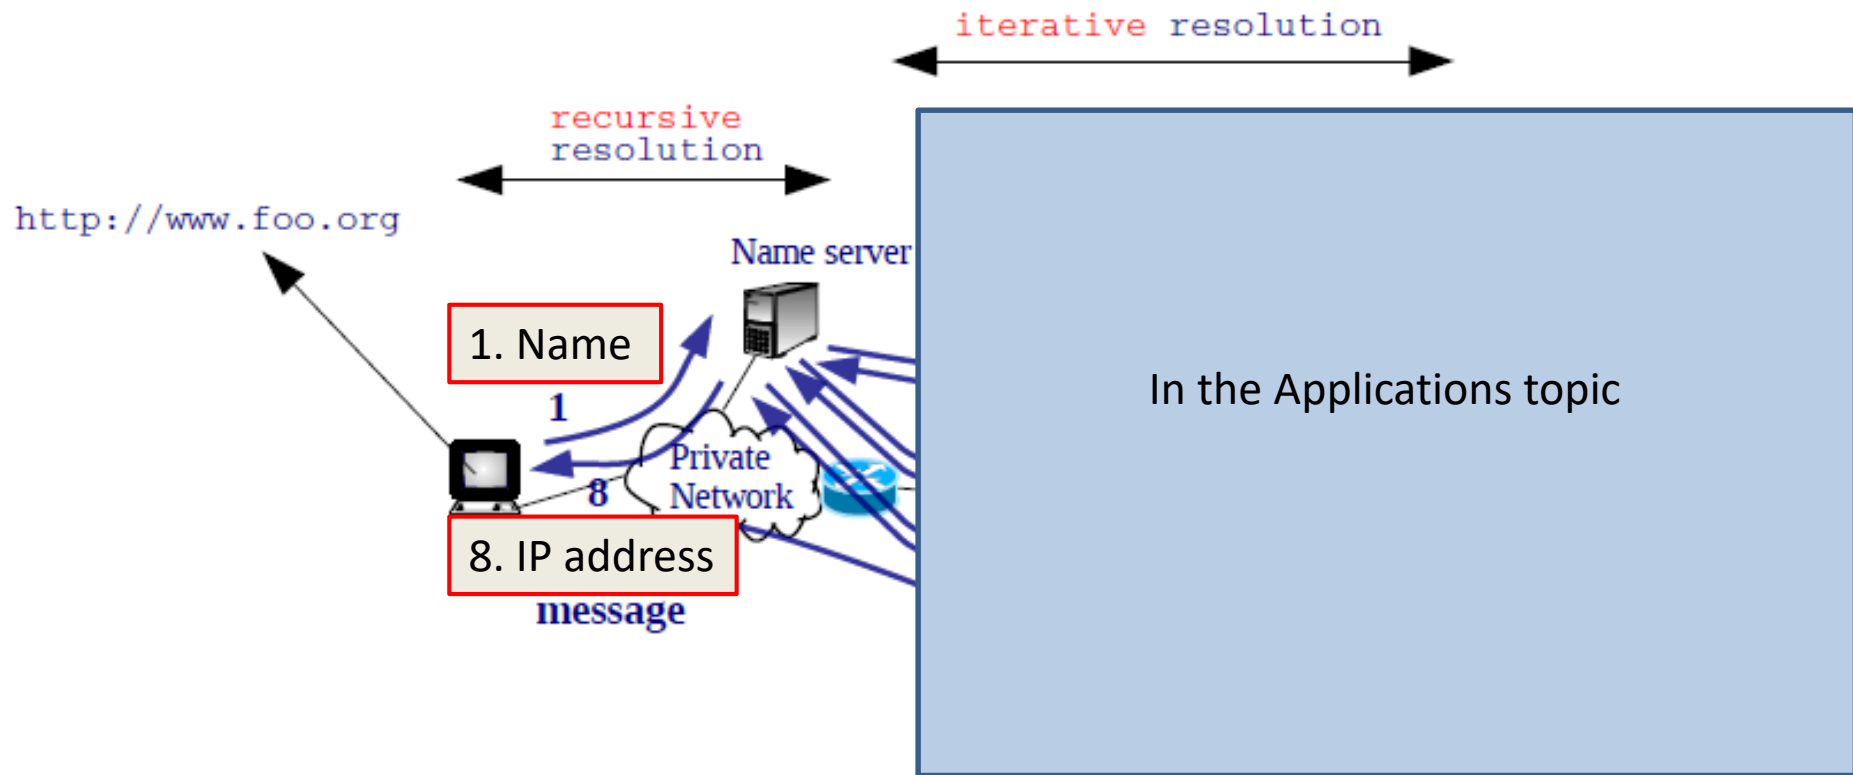

Unit 2


Other supporting protocols and services:

- ARP (Address Resolution Protocol).
- ICMP (Internet Control Message Protocol).
- DHCP (Dynamic Host Configuration Protocol).
- NAT (Network Address Translation).
- DNS (Domain Name System).

Example with DHCP, DNS, ARP


The Internet

Ri: Router

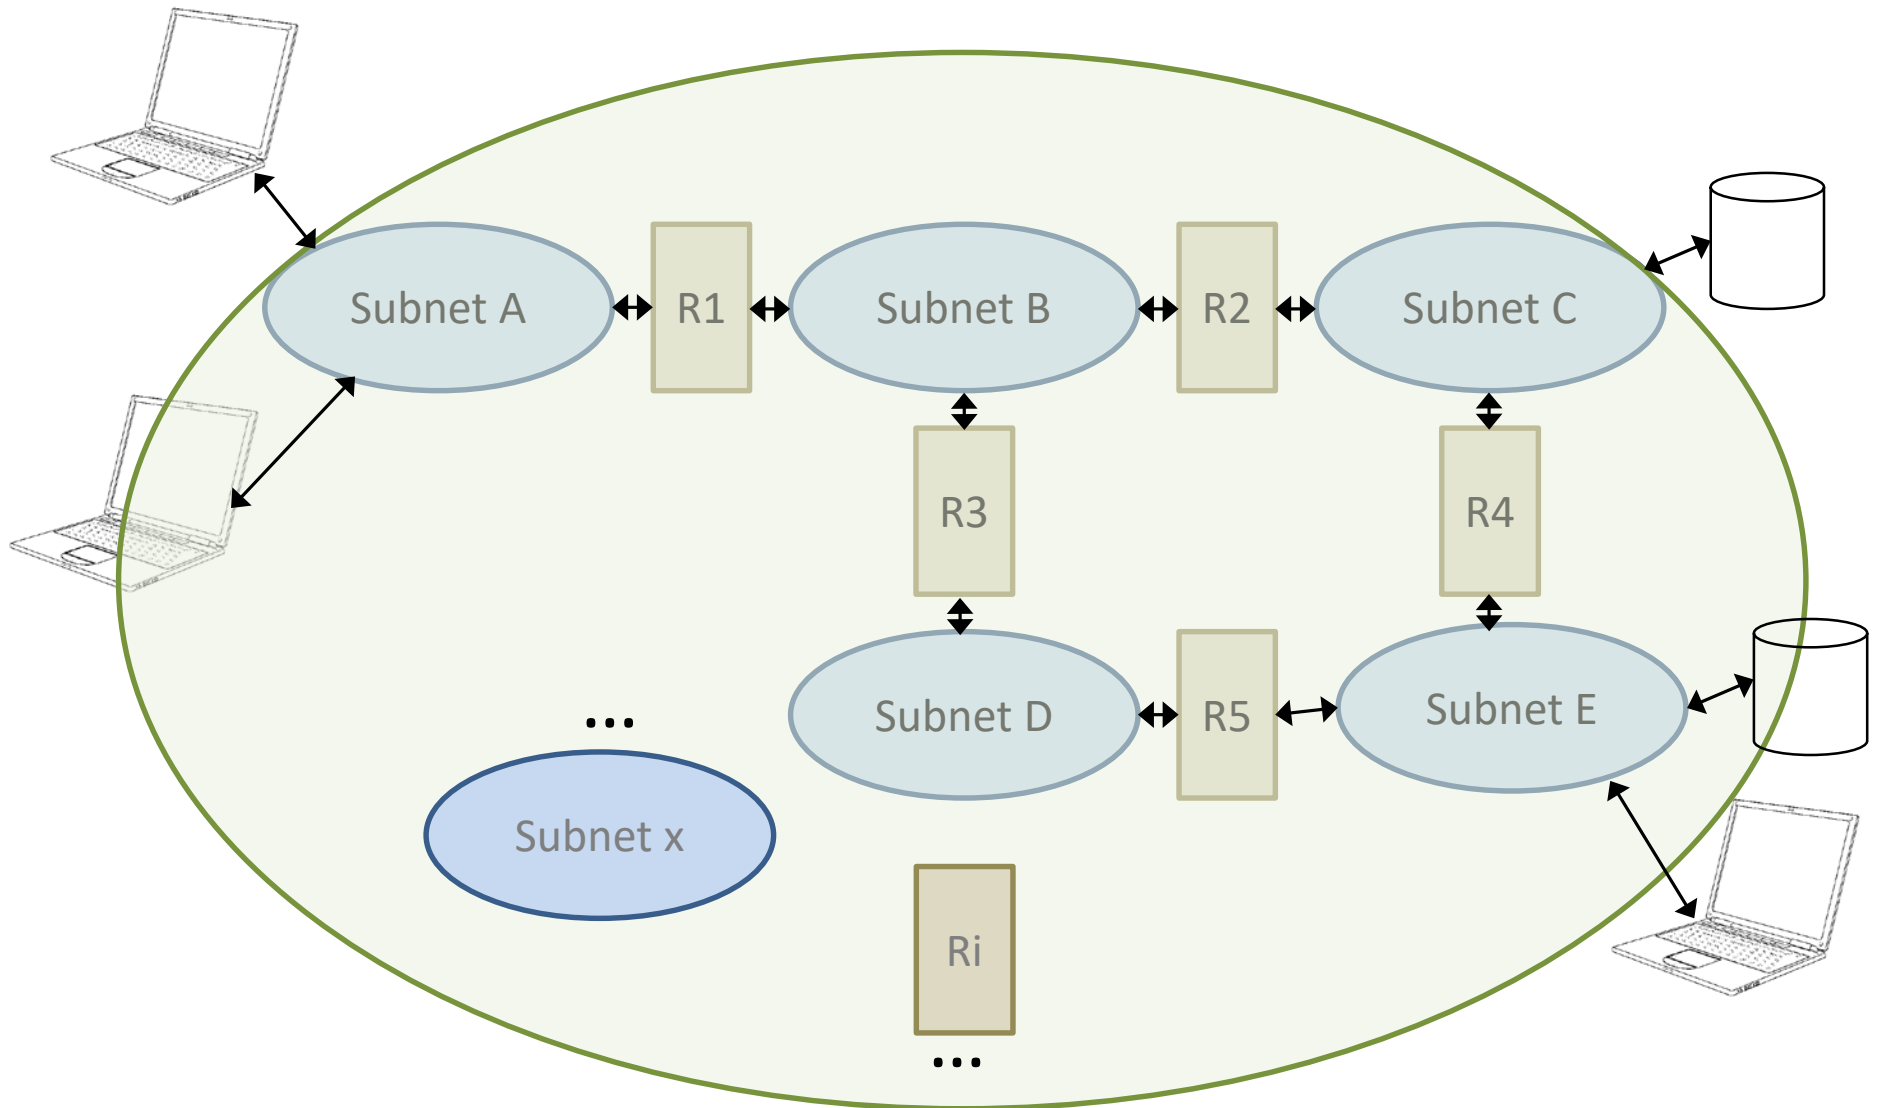


The Internet

Ri: Router

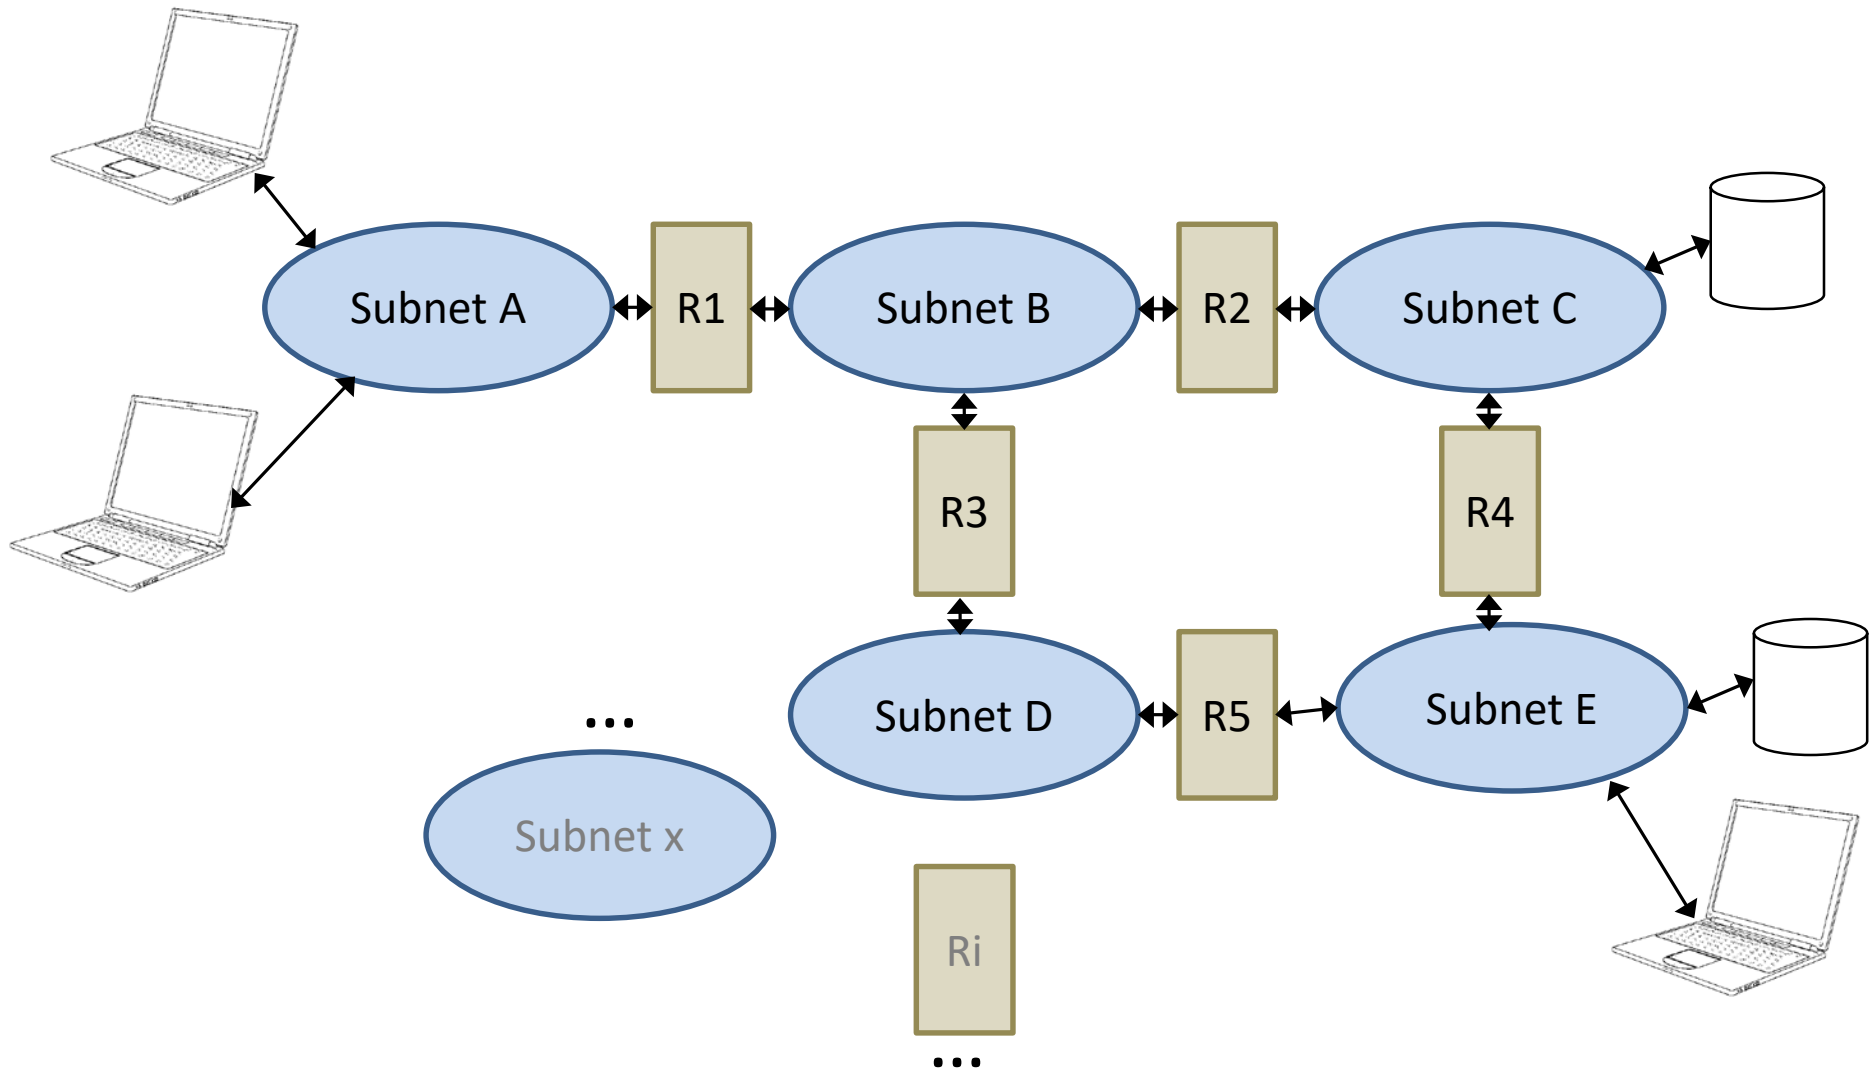


The Internet


Ri: Router

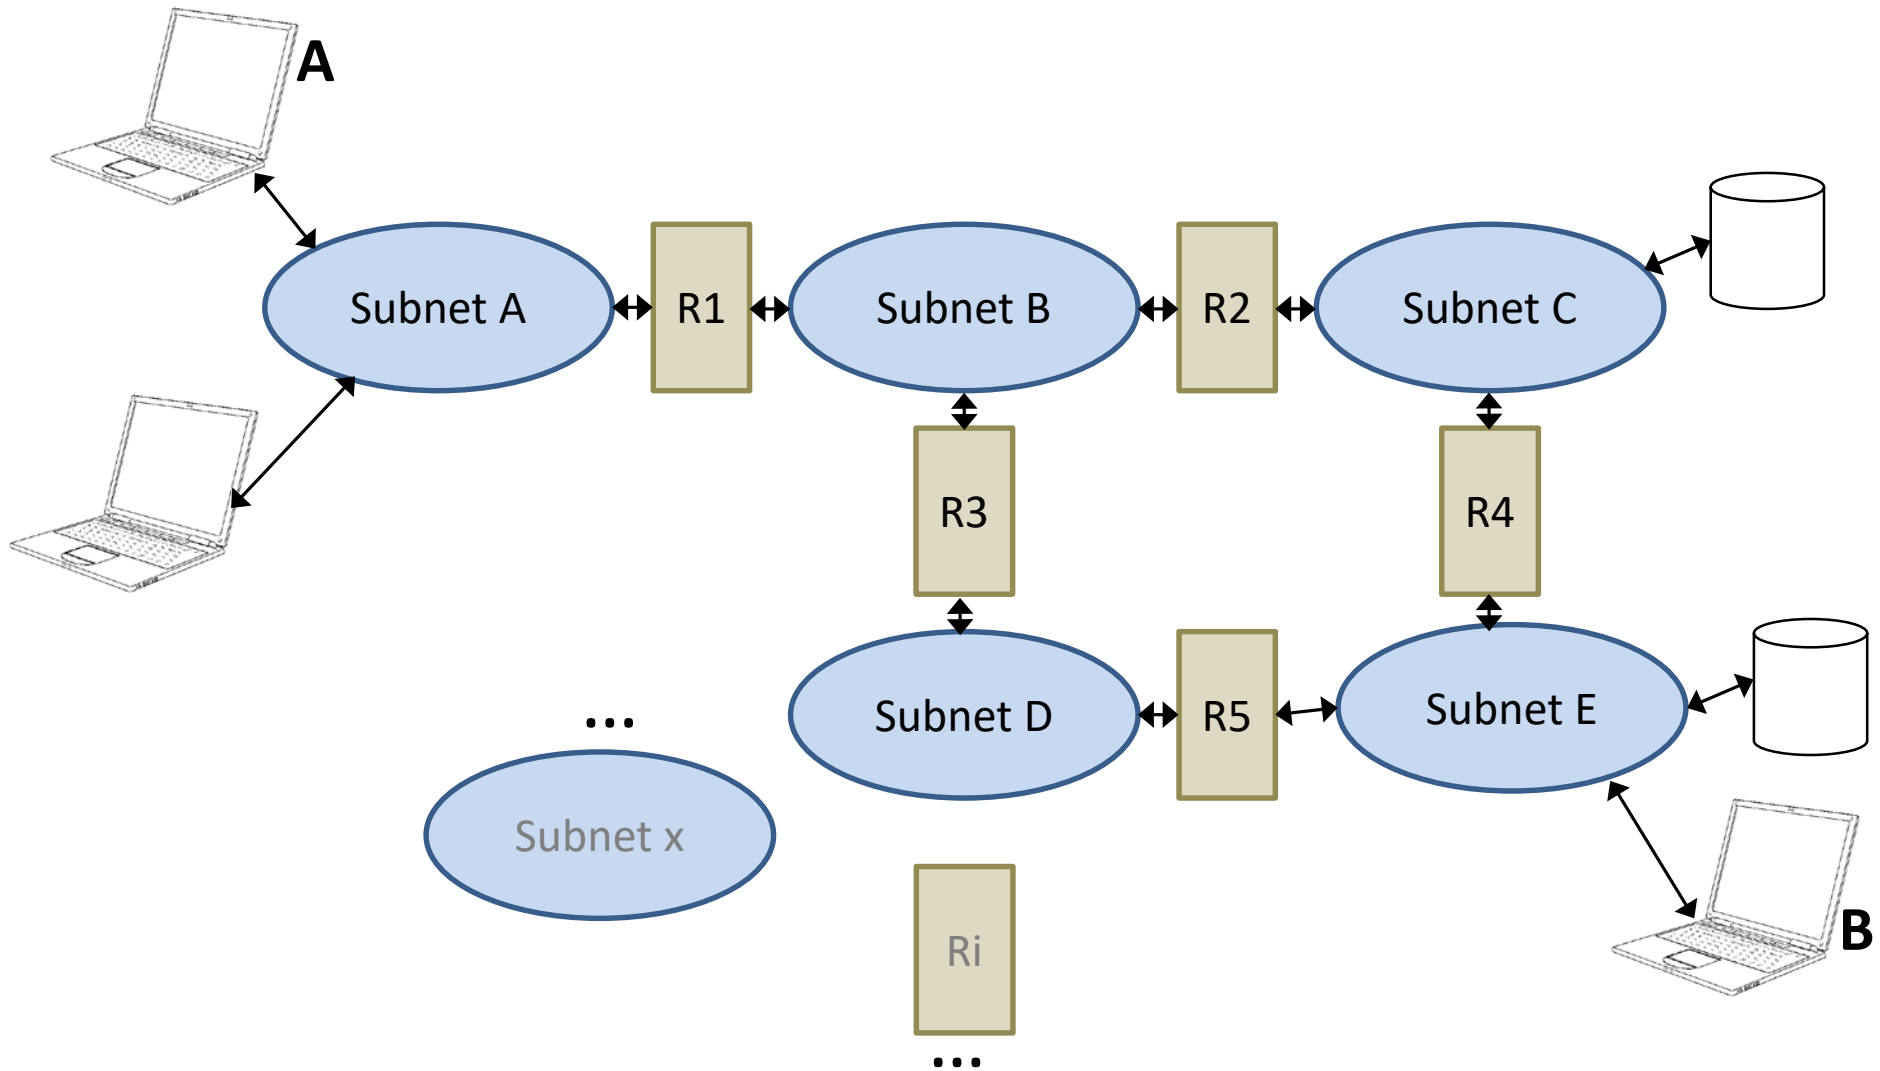

A wants to send a datagram to B

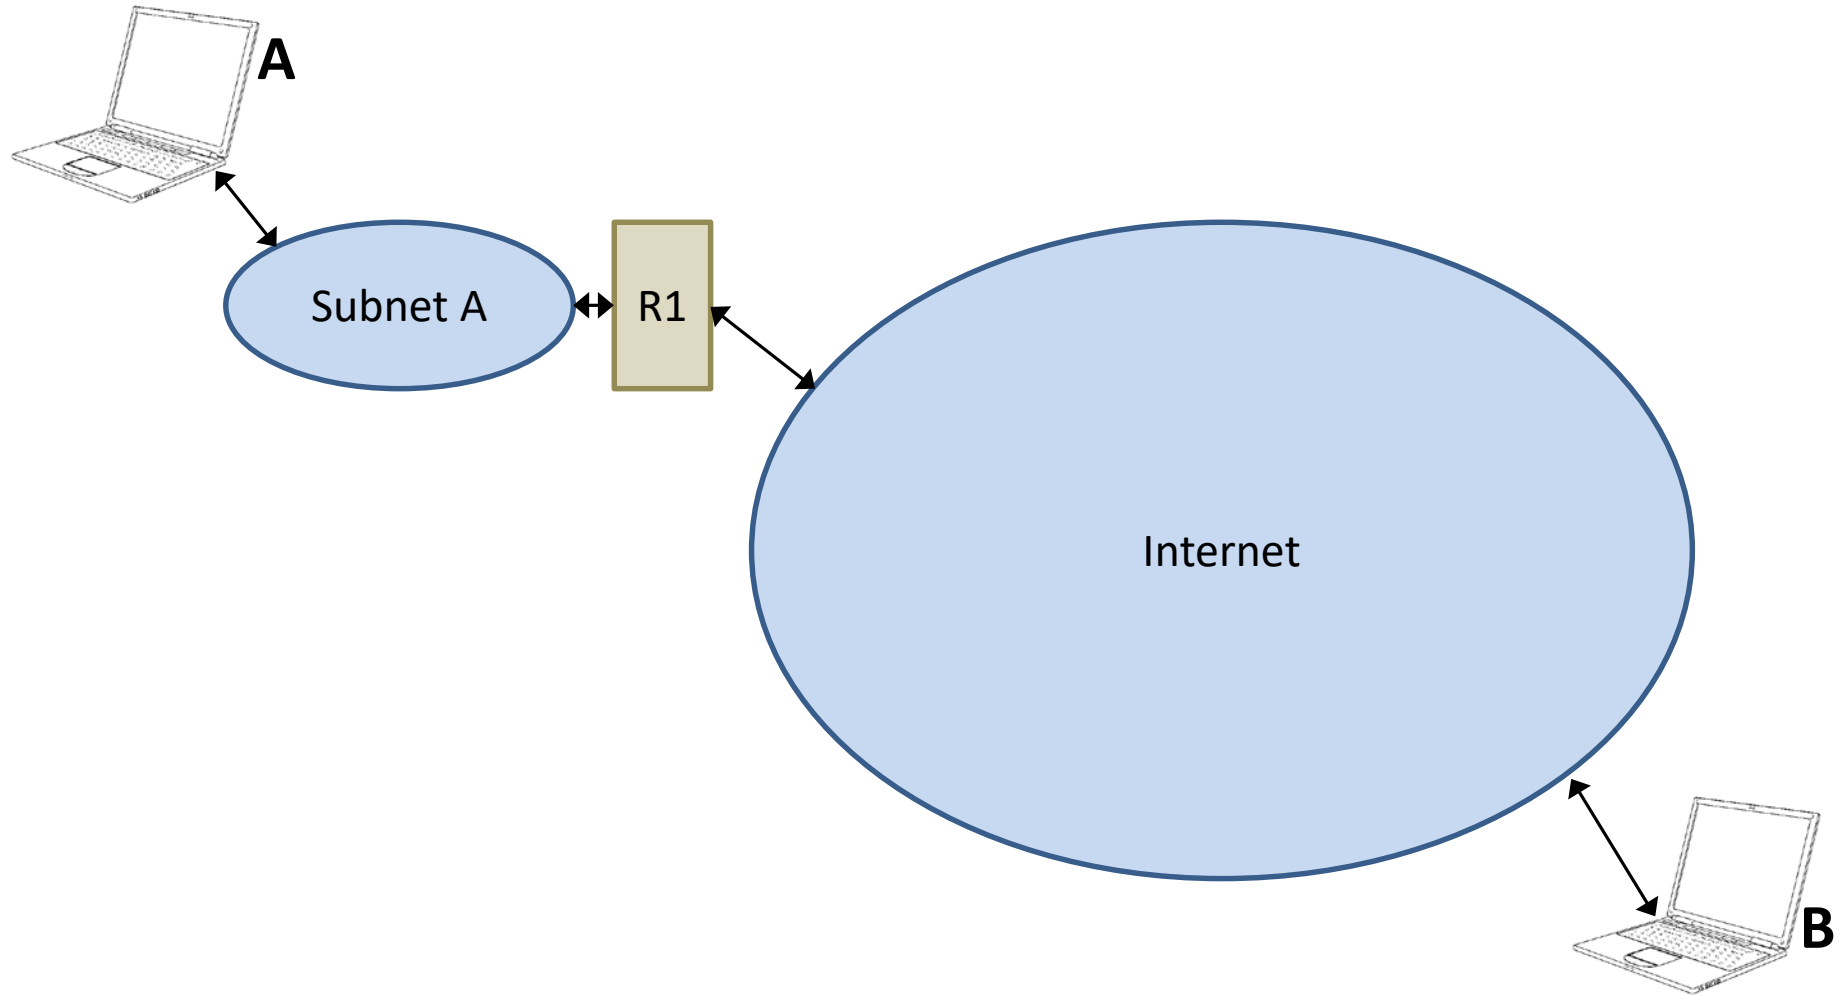


A wants to send a datagram to B

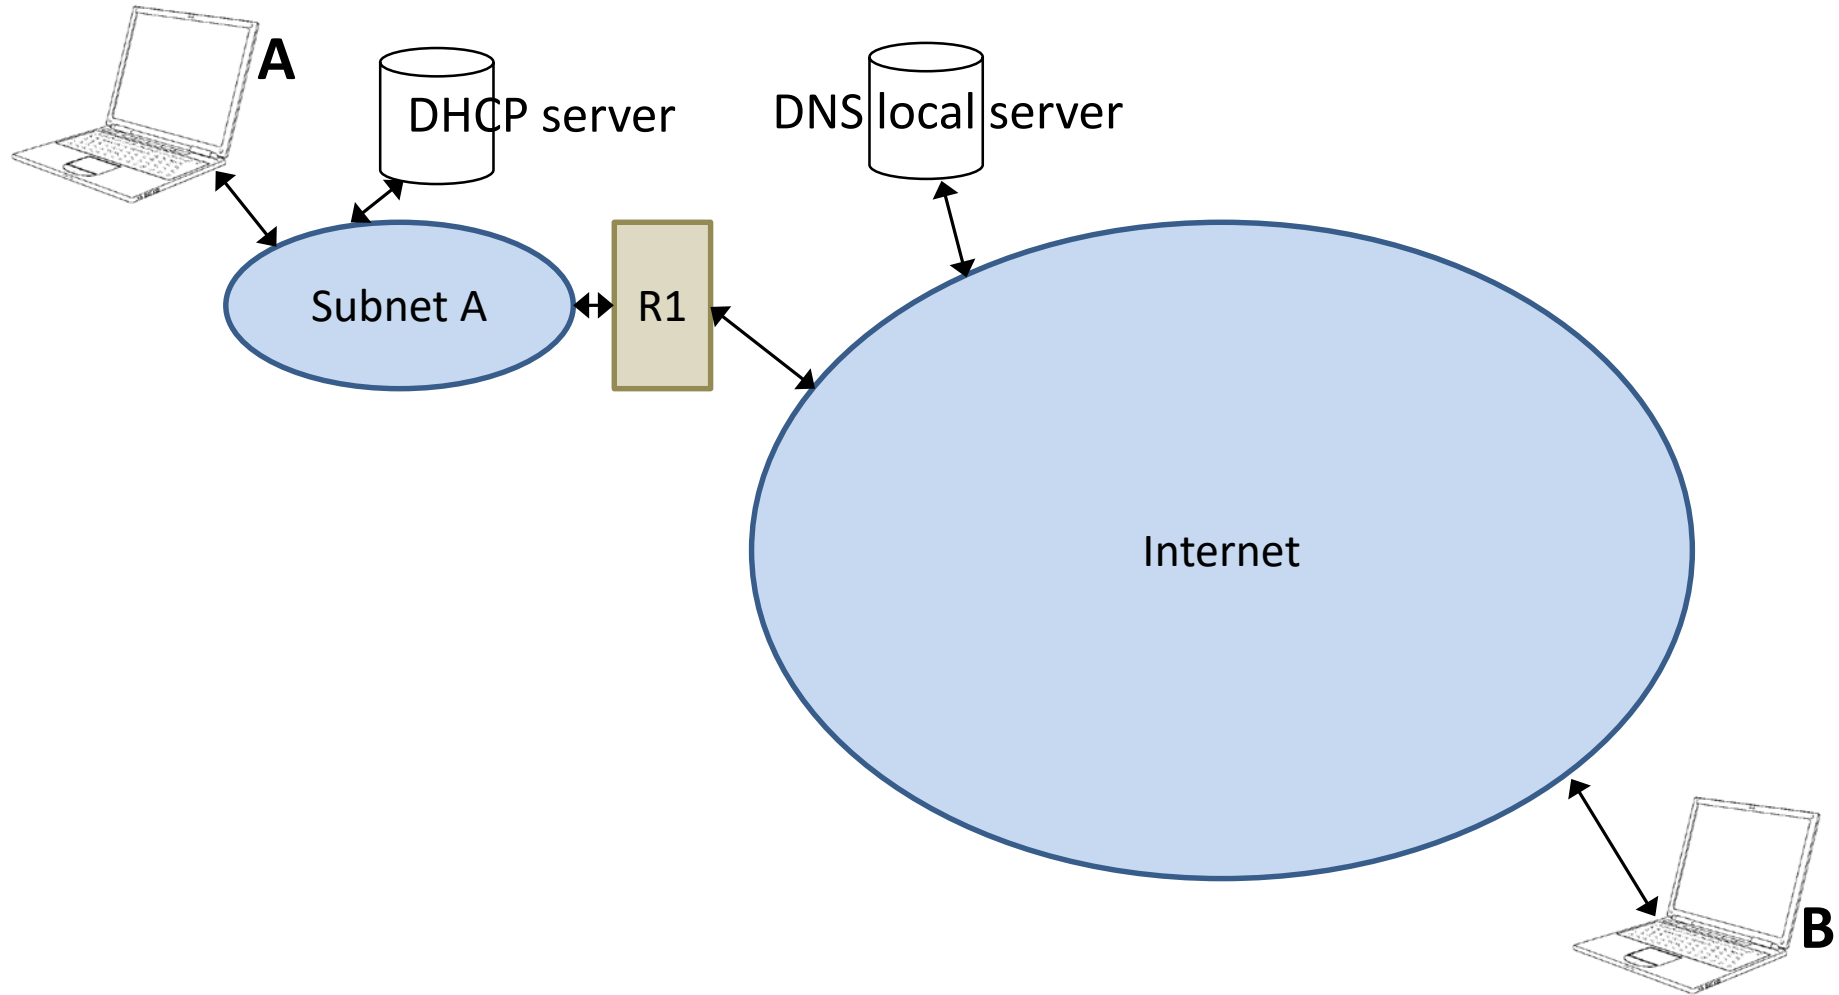

Protocols sequence

- A wants to send a datagram to B
- Host A starts → **DHCP**
- A needs to ask **DNS** for IP of host B (domain name)
- A checks *Routing Table* to know where to send DNS request (DNS server) → to R1
- A needs to find R1 → **ARP**
- A sends **DNS** Request to R1
- Once IP address of Host B known, datagram is sent to R1, after checking Routing Table.

DHCP

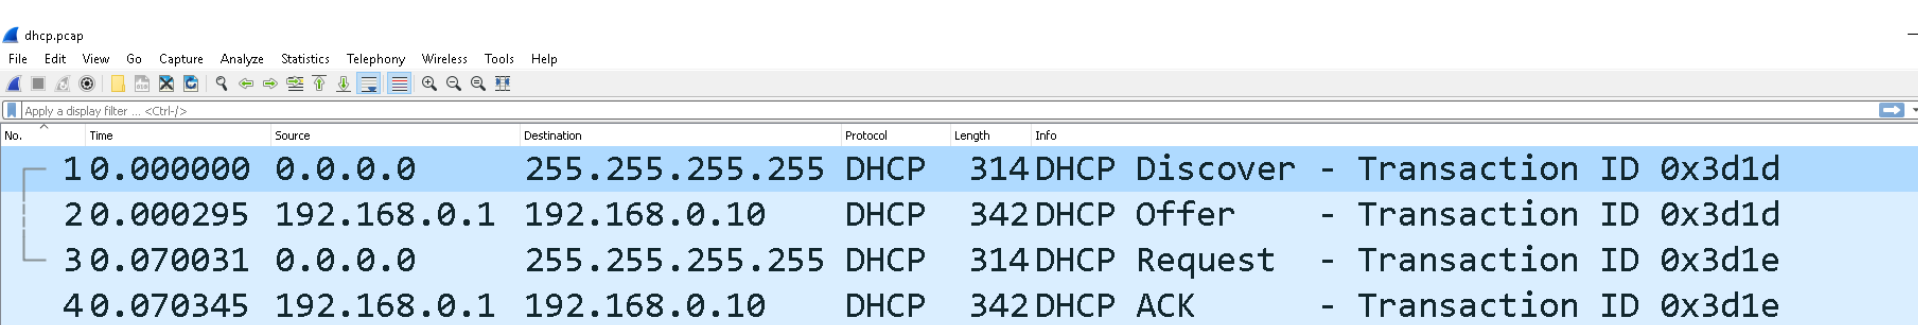

The image shows a Wireshark packet capture window titled 'dhcp.pcap'. The interface includes a menu bar (File, Edit, View, Go, Capture, Analyze, Statistics, Telephony, Wireless, Tools, Help) and a toolbar with various icons. Below the toolbar is a display filter bar showing 'Apply a display filter ... <Ctrl-F>'. The main packet list table is displayed with the following columns: No., Time, Source, Destination, Protocol, Length, and Info. Four packets are listed, all related to a DHCP transaction with Transaction ID 0x3d1d. A bracket on the left side of the first three packets indicates they belong to the same conversation.

No.	Time	Source	Destination	Protocol	Length	Info
1	0.000000	0.0.0.0	255.255.255.255	DHCP	314	DHCP Discover - Transaction ID 0x3d1d
2	0.000295	192.168.0.1	192.168.0.10	DHCP	342	DHCP Offer - Transaction ID 0x3d1d
3	0.070031	0.0.0.0	255.255.255.255	DHCP	314	DHCP Request - Transaction ID 0x3d1e
4	0.070345	192.168.0.1	192.168.0.10	DHCP	342	DHCP ACK - Transaction ID 0x3d1e

- > Frame 1: 314 bytes on wire (2512 bits), 314 bytes captured (2512 bits)
- > Ethernet II, Src: Grandstr_01:fc:42 (00:0b:82:01:fc:42), Dst: Broadcast (ff:ff:ff:ff:ff:ff)
- > Internet Protocol Version 4, Src: 0.0.0.0, Dst: 255.255.255.255
- > User Datagram Protocol, Src Port: 68, Dst Port: 67
- > Bootstrap Protocol (Discover)

DHCP Discover

No.	Time	Source	Destination	Protocol	Length	Info
1	0.000000	0.0.0.0	255.255.255.255	DHCP	314	DHCP Discover - Transaction ID 0x3d1d
2	0.000295	192.168.0.1	192.168.0.10	DHCP	342	DHCP Offer - Transaction ID 0x3d1d
3	0.070031	0.0.0.0	255.255.255.255	DHCP	314	DHCP Request - Transaction ID 0x3d1e
4	0.070345	192.168.0.1	192.168.0.10	DHCP	342	DHCP ACK - Transaction ID 0x3d1e

> Ethernet II, Src: Grandstr_01:fc:42 (00:0b:82:01:fc:42), Dst: Broadcast (ff:ff:ff:ff:ff:ff)
> Internet Protocol Version 4, Src: 0.0.0.0, Dst: 255.255.255.255
> User Datagram Protocol, Src Port: 68, Dst Port: 67

> Bootstrap Protocol (Discover)

Message type: Boot Request (1)

Hardware type: Ethernet (0x01)

Hardware address length: 6

Hops: 0

Transaction ID: 0x00003d1d

Seconds elapsed: 0

> Bootp flags: 0x0000 (Unicast)

Client IP address: 0.0.0.0

Your (client) IP address: 0.0.0.0

Next server IP address: 0.0.0.0

Relay agent IP address: 0.0.0.0

Client MAC address: Grandstr_01:fc:42 (00:0b:82:01:fc:42)

Client hardware address padding: 00000000000000000000

Server host name not given

Boot file name not given

Magic cookie: DHCP

> Option: (53) DHCP Message Type (Discover)

> Option: (61) Client identifier

> Option: (50) Requested IP Address

> Option: (55) Parameter Request List

> Option: (255) End

Padding: 0000000000000000

DHCP Discover – IP/UDP

dhcpcap

File Edit View Go Capture Analyze Statistics Telephony Wireless Tools Help

Apply a display filter ... <Ctrl-/>

No.	Time	Source	Destination	Protocol	Length	Info
1	0.000000	0.0.0.0	255.255.255.255	DHCP	314	DHCP Discover - Transaction ID 0x3d1d
2	0.000295	192.168.0.1	192.168.0.10	DHCP	342	DHCP Offer - Transaction ID 0x3d1d
3	0.070031	0.0.0.0	255.255.255.255	DHCP	314	DHCP Request - Transaction ID 0x3d1e
4	0.070345	192.168.0.1	192.168.0.10	DHCP	342	DHCP ACK - Transaction ID 0x3d1e

Internet Protocol Version 4, Src: 0.0.0.0, Dst: 255.255.255.255

- 0100 = Version: 4
- 0101 = Header Length: 20 bytes (5)
- > Differentiated Services Field: 0x00 (DSCP: CS0, ECN: Not-ECT)
- Total Length: 300
- Identification: 0xa836 (43062)
- > Flags: 0x00
- Fragment offset: 0
- Time to live: 250
- Protocol: UDP (17)
- Header checksum: 0x178b [validation disabled]
- [Header checksum status: Unverified]
- Source: 0.0.0.0
- Destination: 255.255.255.255
- [Source GeoIP: Unknown]
- [Destination GeoIP: Unknown]

User Datagram Protocol, Src Port: 68, Dst Port: 67

- Source Port: 68
- Destination Port: 67
- Length: 280
- Checksum: 0x591f [unverified]
- [Checksum Status: Unverified]
- [Stream index: 0]

[illegible]

dhcp.pcap

File Edit View Go Capture Analyze Statistics Telephony Wireless Tools Help

Apply a display filter ... <Ctrl-/>

No.	Time	Source	Destination	Protocol	Length	Info
1	0.000000	0.0.0.0	255.255.255.255	DHCP	314	DHCP Discover - Transaction ID 0x3d1d
2	0.000295	192.168.0.1	192.168.0.10	DHCP	342	DHCP Offer - Transaction ID 0x3d1d
3	0.070031	0.0.0.0	255.255.255.255	DHCP	314	DHCP Request - Transaction ID 0x3d1e
4	0.070345	192.168.0.1	192.168.0.10	DHCP	342	DHCP ACK - Transaction ID 0x3d1e

```
> User Datagram Protocol, Src Port: 67, Dst Port: 68
```

- ✓ Bootstrap Protocol (Offer)

Message type: Boot Reply (2)

```
Hardware type: Ethernet (0x01)
```

```
Hardware address length: 6
```

Hops: 0

Transaction ID: 0x00003d1d

Seconds elapsed: 0

```
> Bootp flags: 0x0000 (Unicast)
```

```
Client IP address: 0.0.0.0
```

Your (client) IP address: 192.168.0.10

Next server IP address: 192.168.0.1

Relay agent IP address: 0.0.0.0

Client MAC address: Grandstr_01:fc:42 (00:0b:82:01:fc:42)

Client hardware address padding: 00000000000000000000

Server host name not given

```
Boot file name not given
```

Magic cookie: DHCP

```
> Option: (53) DHCP Message Type (Offer)
```

- Option: (1) Subnet Mask

```
> Option: (58) Renewal Time Value
```

> Option: (59) Rebinding Time Value

```
> Option: (51) IP Address Lease Time
```

> Option: (54) DHCP Server Identifier

```
> Option: (255) End
```

[illegible]

DHCP Request

dhcpcap

File Edit View Go Capture Analyze Statistics Telephony Wireless Tools Help

Apply a display filter ... <Ctrl-/>

No.	Time	Source	Destination	Protocol	Length	Info
1	0.000000	0.0.0.0	255.255.255.255	DHCP	314	DHCP Discover - Transaction ID 0x3d1d
2	0.000295	192.168.0.1	192.168.0.10	DHCP	342	DHCP Offer - Transaction ID 0x3d1d
3	0.070031	0.0.0.0	255.255.255.255	DHCP	314	DHCP Request - Transaction ID 0x3d1e
4	0.070345	192.168.0.1	192.168.0.10	DHCP	342	DHCP ACK - Transaction ID 0x3d1e

▼ Bootstrap Protocol (Request)

Message type: Boot Request (1)
Hardware type: Ethernet (0x01)
Hardware address length: 6
Hops: 0
Transaction ID: 0x00003d1e
Seconds elapsed: 0

► Bootp flags: 0x0000 (Unicast)
Client IP address: 0.0.0.0
Your (client) IP address: 0.0.0.0
Next server IP address: 0.0.0.0
Relay agent IP address: 0.0.0.0
Client MAC address: Grandstr_01:fc:42 (00:0b:82:01:fc:42)
Client hardware address padding: 00000000000000000000
Server host name not given
Boot file name not given
Magic cookie: DHCP

► Option: (53) DHCP Message Type (Request)
► Option: (61) Client identifier
► Option: (50) Requested IP Address
► Option: (54) DHCP Server Identifier
► Option: (55) Parameter Request List
► Option: (255) End
Padding: 00

[illegible]

dhcp.pcap

File Edit View Go Capture Analyze Statistics Telephony Wireless Tools Help

Apply a display filter ... <Ctrl-/>

No.	Time	Source	Destination	Protocol	Length	Info
1	0.000000	0.0.0.0	255.255.255.255	DHCP	314	DHCP Discover - Transaction ID 0x3d1d
2	0.000295	192.168.0.1	192.168.0.10	DHCP	342	DHCP Offer - Transaction ID 0x3d1d
3	0.070031	0.0.0.0	255.255.255.255	DHCP	314	DHCP Request - Transaction ID 0x3d1e
4	0.070345	192.168.0.1	192.168.0.10	DHCP	342	DHCP ACK - Transaction ID 0x3d1e

[illegible]

Message type: Boot Reply (2)

Hardware type: Ethernet (0x01)

Hardware address length: 6

Hops: 0

Transaction ID: 0x00003d1e

Seconds elapsed: 0

```
> Bootp flags: 0x0000 (Unicast)
```

Client IP address: 0.0.0.0

Your (client) IP address: 192.168.0.10

Next server IP address: 0.0.0.0

Relay agent IP address: 0.0.0.0

Client MAC address: Grandstr_01:fc:42 (00:0b:82:01:fc:42)

```
Client hardware address padding: 00000000000000000000
```

Server host name not given

Boot file name not given

Magic cookie: DHCP

```
> Option: (53) DHCP Message Type (ACK)
```

```
> Option: (58) Renewal Time Value
```

```
> Option: (59) Rebinding Time Value
```

```
> Option: (51) IP Address Lease Time
```

```
> Option: (54) DHCP Server Identifier
```

- Option: (1) Subnet Mask

```
> Option: (255) End
```

[illegible]

DNS

captura 1 portátil.pcapng

File Edit View Go Capture Analyze Statistics Telephony Wireless Tools Help



Apply a display filter ... <Ctrl-/>

No.	Time	Source	Destination	Protocol	Length	Info
171	44.703751	192.168.1.63	80.58.61.250	DNS	74	Standard query 0xdf3c A www.google.com
172	44.709958	80.58.61.250	192.168.1.63	DNS	90	Standard query response 0xdf3c A www.google.com A 216.58.214.164
174	44.717829	192.168.1.63	80.58.61.250	DNS	74	Standard query 0xdc91 A www.google.com
175	44.724166	80.58.61.250	192.168.1.63	DNS	90	Standard query response 0xdc91 A www.google.com A 216.58.211.196
178	44.736042	192.168.1.63	80.58.61.250	DNS	74	Standard query 0xdc53 AAAA www.google.com
180	44.741684	80.58.61.250	192.168.1.63	DNS	102	Standard query response 0xdc53 AAAA www.google.com AAAA 2a00:1450:4003:801::2004

Frame 171: 74 bytes on wire (592 bits), 74 bytes captured (592 bits) on interface 0

Interface id: 0 (\Device\NPF_{EF1318FF-F69D-48B1-87F6-F2D3DB77C5B7})

Encapsulation type: Ethernet (1)

Arrival Time: Jan 24, 2017 23:09:29.047821000 Hora estándar romance

[Time shift for this packet: 0.000000000 seconds]

Epoch Time: 1485295769.047821000 seconds

[Time delta from previous captured frame: 0.508059000 seconds]

[Time delta from previous displayed frame: 0.508059000 seconds]

[Time since reference or first frame: 44.703751000 seconds]

Frame Number: 171

Frame Length: 74 bytes (592 bits)

Capture Length: 74 bytes (592 bits)

[Frame is marked: False]

[Frame is ignored: False]

[Protocols in frame: eth:ethertype:ip:udp:dns]

[Coloring Rule Name: UDP]

[Coloring Rule String: udp]

Ethernet II, Src: IntelCor_3a:04:3a (5c:e0:c5:3a:04:3a), Dst: Mitrasta_3d:35:90 (e0:41:36:3d:35:90)

> Destination: Mitrasta_3d:35:90 (e0:41:36:3d:35:90)

> Source: IntelCor_3a:04:3a (5c:e0:c5:3a:04:3a)

Type: IPv4 (0x0800)

> Internet Protocol Version 4, Src: 192.168.1.63, Dst: 80.58.61.250

> User Datagram Protocol, Src Port: 57619, Dst Port: 53

> Domain Name System (query)

DNS - ARP

No.	Time	Source	Destination	Protocol	Length	Info
2	0.554532	IntelCor_3a:04:3a	Broadcast	ARP	42	Who has 192.168.1.1? Tell 192.168.1.63
4	0.556282	Mitrasta_3d:35:90	IntelCor_3a:04:3a	ARP	42	192.168.1.1 is at e0:41:36:3d:35:90
22	8.381676	Mitrasta_3d:35:90	IntelCor_3a:04:3a	ARP	42	Who has 192.168.1.63? Tell 192.168.1.1
23	8.381696	IntelCor_3a:04:3a	Mitrasta_3d:35:90	ARP	42	192.168.1.63 is at 5c:e0:c5:3a:04:3a
26	10.581077	IntelCor_3a:04:3a	Broadcast	ARP	42	Who has 192.168.1.1? Tell 192.168.1.63
28	10.583178	Mitrasta_3d:35:90	IntelCor_3a:04:3a	ARP	42	192.168.1.1 is at e0:41:36:3d:35:90
51	20.598894	IntelCor_3a:04:3a	Broadcast	ARP	42	Who has 192.168.1.1? Tell 192.168.1.63
53	20.600845	Mitrasta_3d:35:90	IntelCor_3a:04:3a	ARP	42	192.168.1.1 is at e0:41:36:3d:35:90
78	30.633732	IntelCor_3a:04:3a	Broadcast	ARP	42	Who has 192.168.1.1? Tell 192.168.1.63
80	30.635448	Mitrasta_3d:35:90	IntelCor_3a:04:3a	ARP	42	192.168.1.1 is at e0:41:36:3d:35:90
150	40.660490	IntelCor_3a:04:3a	Broadcast	ARP	42	Who has 192.168.1.1? Tell 192.168.1.63
152	40.664348	Mitrasta_3d:35:90	IntelCor_3a:04:3a	ARP	42	192.168.1.1 is at e0:41:36:3d:35:90
523	47.181598	Mitrasta_3d:35:90	IntelCor_3a:04:3a	ARP	42	Who has 192.168.1.63? Tell 192.168.1.1
524	47.181617	IntelCor_3a:04:3a	Mitrasta_3d:35:90	ARP	42	192.168.1.63 is at 5c:e0:c5:3a:04:3a
1593	50.691356	IntelCor_3a:04:3a	Broadcast	ARP	42	Who has 192.168.1.1? Tell 192.168.1.63
1594	50.693206	Mitrasta_3d:35:90	IntelCor_3a:04:3a	ARP	42	192.168.1.1 is at e0:41:36:3d:35:90
12608	60.758095	IntelCor_3a:04:3a	Broadcast	ARP	42	Who has 192.168.1.1? Tell 192.168.1.63
12609	60.760331	Mitrasta_3d:35:90	IntelCor_3a:04:3a	ARP	42	192.168.1.1 is at e0:41:36:3d:35:90
13504	70.804026	IntelCor_3a:04:3a	Broadcast	ARP	42	Who has 192.168.1.1? Tell 192.168.1.63
13505	70.805997	Mitrasta_3d:35:90	IntelCor_3a:04:3a	ARP	42	192.168.1.1 is at e0:41:36:3d:35:90
13843	80.825163	IntelCor_3a:04:3a	Broadcast	ARP	42	Who has 192.168.1.1? Tell 192.168.1.63
13846	80.826847	Mitrasta_3d:35:90	IntelCor_3a:04:3a	ARP	42	192.168.1.1 is at e0:41:36:3d:35:90
14496	86.062337	Mitrasta_3d:35:90	IntelCor_3a:04:3a	ARP	42	Who has 192.168.1.63? Tell 192.168.1.1
14497	86.062362	IntelCor_3a:04:3a	Mitrasta_3d:35:90	ARP	42	192.168.1.63 is at 5c:e0:c5:3a:04:3a
14498	86.409500	WistronN_f2:c3:21	Broadcast	ARP	60	Gratuitous ARP for 192.168.1.58 (Request)
14499	86.411352	WistronN_f2:c3:21	Broadcast	ARP	60	Who has 192.168.1.58? Tell 0.0.0.0

- > Frame 2: 42 bytes on wire (336 bits), 42 bytes captured (336 bits) on interface 0
- ▼ Ethernet II, Src: IntelCor_3a:04:3a (5c:e0:c5:3a:04:3a), Dst: Broadcast (ff:ff:ff:ff:ff:ff)
 - > Destination: Broadcast (ff:ff:ff:ff:ff:ff)
 - > Source: IntelCor_3a:04:3a (5c:e0:c5:3a:04:3a)
 - Type: ARP (0x0806)
- > Address Resolution Protocol (request)

DNS - ARP Request

No.	Time	Source	Destination	Protocol	Length	Info
2	0.554532	IntelCor_3a:04:3a	Broadcast	ARP	42	Who has 192.168.1.1? Tell 192.168.1.63
4	0.556282	Mitrasta_3d:35:90	IntelCor_3a:04:3a	ARP	42	192.168.1.1 is at e0:41:36:3d:35:90
22	8.381676	Mitrasta_3d:35:90	IntelCor_3a:04:3a	ARP	42	Who has 192.168.1.63? Tell 192.168.1.1
23	8.381696	IntelCor_3a:04:3a	Mitrasta_3d:35:90	ARP	42	192.168.1.63 is at 5c:e0:c5:3a:04:3a
26	10.581077	IntelCor_3a:04:3a	Broadcast	ARP	42	Who has 192.168.1.1? Tell 192.168.1.63
28	10.583178	Mitrasta_3d:35:90	IntelCor_3a:04:3a	ARP	42	192.168.1.1 is at e0:41:36:3d:35:90
51	20.598894	IntelCor_3a:04:3a	Broadcast	ARP	42	Who has 192.168.1.1? Tell 192.168.1.63
53	20.600845	Mitrasta_3d:35:90	IntelCor_3a:04:3a	ARP	42	192.168.1.1 is at e0:41:36:3d:35:90
78	30.633732	IntelCor_3a:04:3a	Broadcast	ARP	42	Who has 192.168.1.1? Tell 192.168.1.63
80	30.635448	Mitrasta_3d:35:90	IntelCor_3a:04:3a	ARP	42	192.168.1.1 is at e0:41:36:3d:35:90
150	40.660490	IntelCor_3a:04:3a	Broadcast	ARP	42	Who has 192.168.1.1? Tell 192.168.1.63
152	40.664348	Mitrasta_3d:35:90	IntelCor_3a:04:3a	ARP	42	192.168.1.1 is at e0:41:36:3d:35:90
523	47.181598	Mitrasta_3d:35:90	IntelCor_3a:04:3a	ARP	42	Who has 192.168.1.63? Tell 192.168.1.1
524	47.181617	IntelCor_3a:04:3a	Mitrasta_3d:35:90	ARP	42	192.168.1.63 is at 5c:e0:c5:3a:04:3a
1593	50.691356	IntelCor_3a:04:3a	Broadcast	ARP	42	Who has 192.168.1.1? Tell 192.168.1.63
1594	50.693206	Mitrasta_3d:35:90	IntelCor_3a:04:3a	ARP	42	192.168.1.1 is at e0:41:36:3d:35:90
12608	60.758095	IntelCor_3a:04:3a	Broadcast	ARP	42	Who has 192.168.1.1? Tell 192.168.1.63
12609	60.760331	Mitrasta_3d:35:90	IntelCor_3a:04:3a	ARP	42	192.168.1.1 is at e0:41:36:3d:35:90
13504	70.804026	IntelCor_3a:04:3a	Broadcast	ARP	42	Who has 192.168.1.1? Tell 192.168.1.63
13505	70.805997	Mitrasta_3d:35:90	IntelCor_3a:04:3a	ARP	42	192.168.1.1 is at e0:41:36:3d:35:90
13843	80.825163	IntelCor_3a:04:3a	Broadcast	ARP	42	Who has 192.168.1.1? Tell 192.168.1.63
13846	80.826847	Mitrasta_3d:35:90	IntelCor_3a:04:3a	ARP	42	192.168.1.1 is at e0:41:36:3d:35:90
14496	86.062337	Mitrasta_3d:35:90	IntelCor_3a:04:3a	ARP	42	Who has 192.168.1.63? Tell 192.168.1.1
14497	86.062362	IntelCor_3a:04:3a	Mitrasta_3d:35:90	ARP	42	192.168.1.63 is at 5c:e0:c5:3a:04:3a
14498	86.409500	WistronN_f2:c3:21	Broadcast	ARP	60	Gratuitous ARP for 192.168.1.58 (Request)
14499	86.411352	WistronN_f2:c3:21	Broadcast	ARP	60	Who has 192.168.1.58? Tell 0.0.0.0

> Frame 2: 42 bytes on wire (336 bits), 42 bytes captured (336 bits) on interface 0
 > Ethernet II, Src: IntelCor_3a:04:3a (5c:e0:c5:3a:04:3a), Dst: Broadcast (ff:ff:ff:ff:ff:ff)

▼ Address Resolution Protocol (request)

Hardware type: Ethernet (1)
 Protocol type: IPv4 (0x0800)
 Hardware size: 6
 Protocol size: 4
 Opcode: request (1)
 Sender MAC address: IntelCor_3a:04:3a (5c:e0:c5:3a:04:3a)
 Sender IP address: 192.168.1.63
 Target MAC address: 00:00:00_00:00:00 (00:00:00:00:00:00)
 Target IP address: 192.168.1.1

DNS - ARP Reply

No.	Time	Source	Destination	Protocol	Length	Info
2	0.554532	IntelCor_3a:04:3a	Broadcast	ARP	42	Who has 192.168.1.1? Tell 192.168.1.63
4	0.556282	Mitrasta_3d:35:90	IntelCor_3a:04:3a	ARP	42	192.168.1.1 is at e0:41:36:3d:35:90
22	8.381676	Mitrasta_3d:35:90	IntelCor_3a:04:3a	ARP	42	Who has 192.168.1.63? Tell 192.168.1.1
23	8.381696	IntelCor_3a:04:3a	Mitrasta_3d:35:90	ARP	42	192.168.1.63 is at 5c:e0:c5:3a:04:3a
26	10.581077	IntelCor_3a:04:3a	Broadcast	ARP	42	Who has 192.168.1.1? Tell 192.168.1.63
28	10.583178	Mitrasta_3d:35:90	IntelCor_3a:04:3a	ARP	42	192.168.1.1 is at e0:41:36:3d:35:90
51	20.598894	IntelCor_3a:04:3a	Broadcast	ARP	42	Who has 192.168.1.1? Tell 192.168.1.63
53	20.600845	Mitrasta_3d:35:90	IntelCor_3a:04:3a	ARP	42	192.168.1.1 is at e0:41:36:3d:35:90
78	30.633732	IntelCor_3a:04:3a	Broadcast	ARP	42	Who has 192.168.1.1? Tell 192.168.1.63
80	30.635448	Mitrasta_3d:35:90	IntelCor_3a:04:3a	ARP	42	192.168.1.1 is at e0:41:36:3d:35:90
150	40.660490	IntelCor_3a:04:3a	Broadcast	ARP	42	Who has 192.168.1.1? Tell 192.168.1.63
152	40.664348	Mitrasta_3d:35:90	IntelCor_3a:04:3a	ARP	42	192.168.1.1 is at e0:41:36:3d:35:90
523	47.181598	Mitrasta_3d:35:90	IntelCor_3a:04:3a	ARP	42	Who has 192.168.1.63? Tell 192.168.1.1
524	47.181617	IntelCor_3a:04:3a	Mitrasta_3d:35:90	ARP	42	192.168.1.63 is at 5c:e0:c5:3a:04:3a
1593	50.691356	IntelCor_3a:04:3a	Broadcast	ARP	42	Who has 192.168.1.1? Tell 192.168.1.63
1594	50.693206	Mitrasta_3d:35:90	IntelCor_3a:04:3a	ARP	42	192.168.1.1 is at e0:41:36:3d:35:90
12608	60.758095	IntelCor_3a:04:3a	Broadcast	ARP	42	Who has 192.168.1.1? Tell 192.168.1.63
12609	60.760331	Mitrasta_3d:35:90	IntelCor_3a:04:3a	ARP	42	192.168.1.1 is at e0:41:36:3d:35:90
13504	70.804026	IntelCor_3a:04:3a	Broadcast	ARP	42	Who has 192.168.1.1? Tell 192.168.1.63
13505	70.805997	Mitrasta_3d:35:90	IntelCor_3a:04:3a	ARP	42	192.168.1.1 is at e0:41:36:3d:35:90
13843	80.825163	IntelCor_3a:04:3a	Broadcast	ARP	42	Who has 192.168.1.1? Tell 192.168.1.63
13846	80.826847	Mitrasta_3d:35:90	IntelCor_3a:04:3a	ARP	42	192.168.1.1 is at e0:41:36:3d:35:90
14496	86.062337	Mitrasta_3d:35:90	IntelCor_3a:04:3a	ARP	42	Who has 192.168.1.63? Tell 192.168.1.1
14497	86.062362	IntelCor_3a:04:3a	Mitrasta_3d:35:90	ARP	42	192.168.1.63 is at 5c:e0:c5:3a:04:3a
14498	86.409500	WistronN_f2:c3:21	Broadcast	ARP	60	Gratuitous ARP for 192.168.1.58 (Request)
14499	86.411352	WistronN_f2:c3:21	Broadcast	ARP	60	Who has 192.168.1.58? Tell 0.0.0.0

> Frame 4: 42 bytes on wire (336 bits), 42 bytes captured (336 bits) on interface 0
 > Ethernet II, Src: Mitrasta_3d:35:90 (e0:41:36:3d:35:90), Dst: IntelCor_3a:04:3a (5c:e0:c5:3a:04:3a)

✓ Address Resolution Protocol (reply)

Hardware type: Ethernet (1)
 Protocol type: IPv4 (0x0800)
 Hardware size: 6
 Protocol size: 4
 Opcode: reply (2)
 Sender MAC address: Mitrasta_3d:35:90 (e0:41:36:3d:35:90)
 Sender IP address: 192.168.1.1
 Target MAC address: IntelCor_3a:04:3a (5c:e0:c5:3a:04:3a)
 Target IP address: 192.168.1.63

DNS Request IP/UDP

Wireshark 3.10.0 (64-bit)

No.	Time	Source	Destination	Protocol	Length	Info
171	44.703751	192.168.1.63	80.58.61.250	DNS	74	Standard query 0xdf3c A www.google.com
172	44.709958	80.58.61.250	192.168.1.63	DNS	90	Standard query response 0xdf3c A www.google.com A 216.58.214.164
174	44.717829	192.168.1.63	80.58.61.250	DNS	74	Standard query 0xdc91 A www.google.com
175	44.724166	80.58.61.250	192.168.1.63	DNS	90	Standard query response 0xdc91 A www.google.com A 216.58.211.196
178	44.736042	192.168.1.63	80.58.61.250	DNS	74	Standard query 0xdc53 AAAA www.google.com
180	44.741684	80.58.61.250	192.168.1.63	DNS	102	Standard query response 0xdc53 AAAA www.google.com AAAA 2a00:1450:4003:801::2004

> Ethernet II, Src: IntelCor_3a:04:3a (5c:e0:c5:3a:04:3a), Dst: Mitrasta_3d:35:90 (e0:41:36:3d:35:90)

▼ Internet Protocol Version 4, Src: 192.168.1.63, Dst: 80.58.61.250

0100 = Version: 4

.... 0101 = Header Length: 20 bytes (5)

> Differentiated Services Field: 0x00 (DSCP: CS0, ECN: Not-ECT)

Total Length: 60

Identification: 0x04ab (1195)

> Flags: 0x00

Fragment offset: 0

Time to live: 128

Protocol: UDP (17)

Header checksum: 0xe5ea [validation disabled]

[Header checksum status: Unverified]

Source: 192.168.1.63

Destination: 80.58.61.250

[Source GeoIP: Unknown]

[Destination GeoIP: Unknown]

▼ User Datagram Protocol, Src Port: 57619, Dst Port: 53

Source Port: 57619

Destination Port: 53

Length: 40

Checksum: 0x6055 [unverified]

[Checksum Status: Unverified]

[Stream index: 9]

▼ Domain Name System (query)

[\[Response In: 172\]](#)

Transaction ID: 0xdf3c

> Flags: 0x0100 Standard query

Questions: 1

Answer RRs: 0

Authority RRs: 0

Additional RRs: 0

> Queries