


# CLI Client

# CLI CLIENT



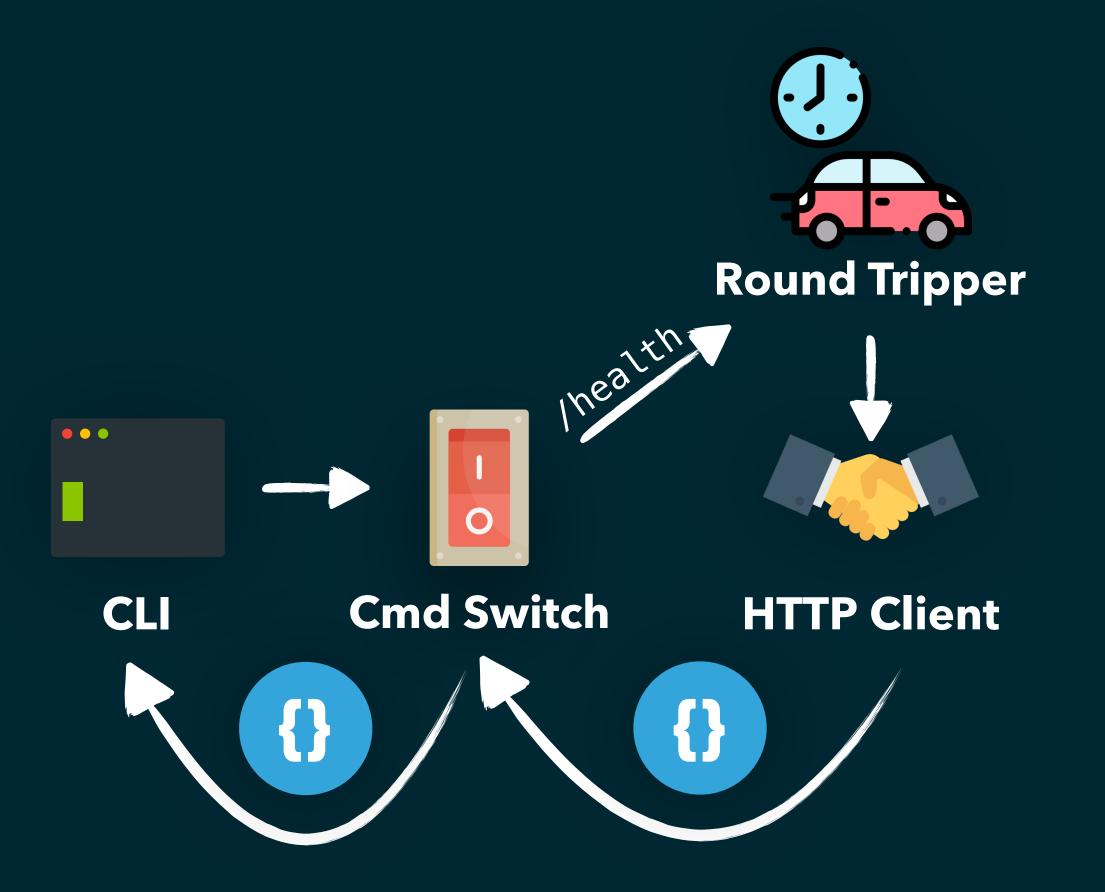

#### COMMANDS



- ./bin/client create
- ./bin/client edit
- ./bin/client fetch
- ./bin/client delete

#### CREATE



./bin/client create

--title string

--message string

-duration time Duration

#### **EDIT**



```
./bin/client edit
```

--id []flag.Value

--title string

--message string

--duration time.Duration

## FETCH



```
./bin/client fetch
--id []flag.Value
```

### DELETE



./bin/client delete

--id []flag.Value

# []FLAG.VALUE




```
type Value interface {
   String() string
   Set(string) error
}
```

# INTERFACES IN GO











```
type Buyer interface {
    HasMoney() bool
    Age() int
}
```

#### **CLIENT RESPONSE**



```
"id": "2020-01-09 13:11:56 +0200",
"title": "Some title",
"message": "Some message",
"duration": 1000000000,
"created_at": "2020-01-14T18:08:09.731354+02:00",
"modified_at": "2020-01-14T18:08:09.731354+02:00"
}
```