


F:/sg mitarai/ReoEngine
/src/RenderTargetManager.h

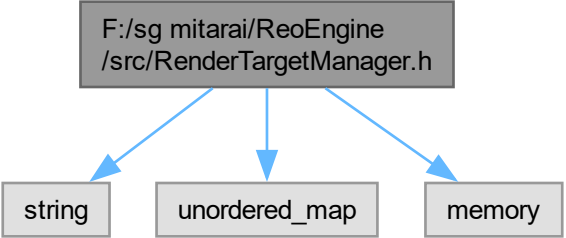

```
graph TD; A["F:/sg mitarai/ReoEngine  
/src/RenderTargetManager.h"] --> B["string"]; A --> C["unordered_map"]; A --> D["memory"];
```

The diagram illustrates the dependencies of the file `F:/sg mitarai/ReoEngine/src/RenderTargetManager.h`. It is represented as a central gray box at the top. Three blue arrows originate from the bottom of this box and point to three separate gray boxes below it. These boxes are labeled `string`, `unordered_map`, and `memory` from left to right, indicating that the header file depends on these standard C++ components.

string

unordered_map

memory