

Skygate Play

SKG26 BUILDING 345 & 346

SCH001 - ARCHITECTURAL MATERIALS, FIXTURES & FITTINGS SCHEDULE

Brisbane Airport Corporation Pty Ltd
11 The Circuit Brisbane Airport QLD 4008
PO Box 61 Hamilton QLD 4007 Australia
Site Description: SKG26

Prepared by:
Archipelago Architects
Level 3, 199 George Street, BRISBANE QLD 4000

Prepared for:
Brisbane Airport Corporation Pty Ltd



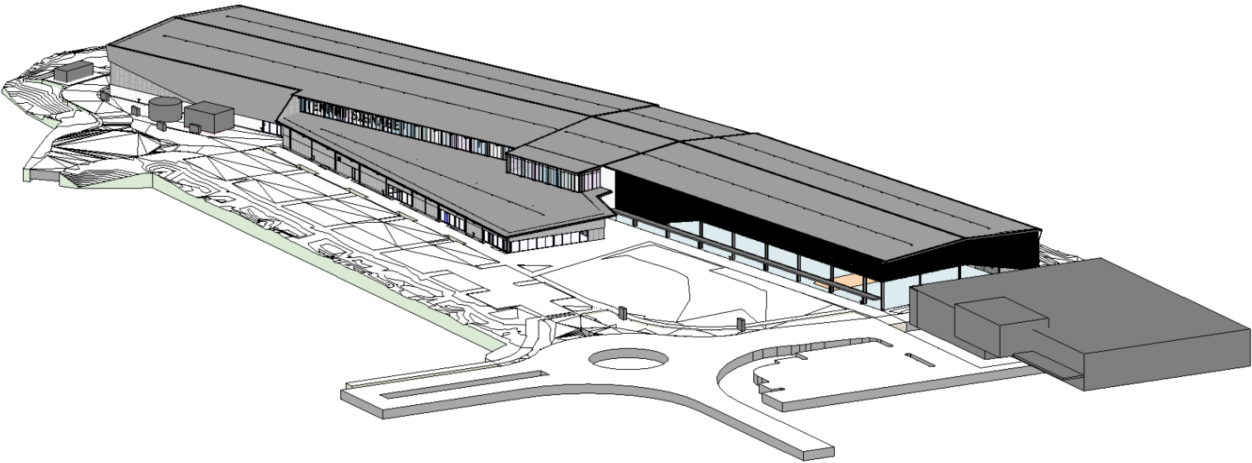
TABLE OF CONTENTS

Number	Section	Contents	Page No.
1	STRUCTURE	Structural building elements - blockwork, structural steel	1
2	ENCLOSURE	Cladding, doors, glazing, roofing, waterproofing	3
3	INSULATION	Roof and wall insulation	7
4	LININGS	Internal wall linings	8
5	PARTITIONS	External and internal wall system build ups, including proprietary cubicle partition systems	9
6	CEILINGS & SOFFITS	Internal and external ceiling and soffit materials	11
7	FLOOR & WALL FINISHES	Internal floor and wall finishes, including splashbacks and skirtings	12
8	PAINT & POWDERCOAT FINISHES	Paint and powdercoat finishes to structural elements, enclosure, linings and ceilings / soffits	13
9	METALWORK	Metalwork awnings, balustrades, gates, handrails, screening	15
10	SIGNAGE	Building signage, room identification signage, statutory signage	17
11	FIXTURES, FITTINGS & EQUIPMENT	Miscellaneous fitments	18
12	JOINERY	Joinery finishes to benchtops, cupboards and kickboards, including joinery hardware	19
13	MECHANICAL	Mechanical equipment	20
14	HYDRAULIC	Hydraulic fixtures and fittings	21
15	ELECTRICAL	Electrical fittings, including fans, lighting and switches	26

DOCUMENT CONTROL

Client:	Brisbane Airport Corporation Pty Ltd
Document:	SCH001 - ARCHITECTURAL MATERIALS, FIXTURES & FITTINGS SCHEDULE
File:	J:\Projects\25027_BNP_Skygate Play\03 Design Process\AR\11 Data and Schedules\MF&F\SCH001 Materials, Fixtures & Fittings Schedule.xls
Date:	04.02.2026
Revision:	2
Author:	JB
Checked by:	DC

Note: This schedule is to be read in conjunction with Brisbane Airport Corporation Design Guidelines. Refer any discrepancies to the Architect for confirmation.



KEYNOTE CODE	KEYNOTE DESCRIPTION	PRODUCT DESCRIPTION	LOCATION IN PROJECT	SUPPLIER DETAILS	WARRANTY	COMMENTS/ APPLICATION	INDICATIVE IMAGE
1. STRUCTURE							
CON001	CONCRETE SLAB	Sealed. Steel trowel burnished finish. Final surface to achieve min P4 slip rating. Contractor to provide test result to certifier for approval. CCS streetscape penetrative sealer. Ardex WPM155 to wet areas	Internally UNO				
CON002	CONCRETE SLAB	Sealed and Waterwashed finish refer to Landscape Architect. Final surface to achieve min P4 slip rating. Contractor to provide test result to certifier for approval.	Externally			Refer LA	
COL	STRUCTURAL STEEL COLUMN. REFER TO ENG DETAILS. PNT100 TO ALL EXPOSED STRUCTURAL STEEL	Refer to Structural Eng Details for member sizing and connection details and required protective galvanising finished. REFER TO PNT100 FOR REQUIRED VISIBLE FINISH TO ALL EXPOSED STRUCTURAL STEEL	General				
STR001	STRUCTURAL STEEL COLUMN. REFER TO ENG DETAILS. PNT100 TO ALL EXPOSED STRUCTURAL STEEL	Refer to Structural Eng Details for member sizing and connection details and required protective galvanising finished. REFER TO PNT100 FOR REQUIRED VISIBLE FINISH TO ALL EXPOSED STRUCTURAL STEEL	General				
STR002	STRUCTURAL STEEL FRAMING. REFER TO ENG DETAILS.	Refer to Structural Eng Details for member sizing and connection details and required protective galvanising finished. REFER TO PNT100 FOR REQUIRED VISIBLE FINISH TO ALL EXPOSED STRUCTURAL STEEL	General				

KEYNOTE CODE	KEYNOTE DESCRIPTION	PRODUCT DESCRIPTION	LOCATION IN PROJECT	SUPPLIER DETAILS	WARRANTY	COMMENTS/ APPLICATION	INDICATIVE IMAGE
2. ENCLOSURE							
CLD001	FC CLADDING - EXPRESSED JOINT	Manufacturer: James Hardie compressed fibre cement board with expressed joint and cavity tophat with backing strip Range: Exotec Finish: Prefinished to all sides Colour: tbc Thickness: 9mm + 35mm vertical cavity batten with membrane to frame Sheet joints: As appearing in elevations, 1/3 stretcher (Ashler) pattern Installed in accordance to manufacturer's recommendation including gasket and backing strips Accessories: Propriety Internal & External corners, flashings, joiners, cavity vent strip to bottom edge.	External walls - refer Elevations				
CLD003	PROFILED METAL SHEET CLADDING - TRIMDEK	Manufacturer: Lysaght Range: Trimdek Finish: Colorbond Colour: tbc Thickness: 0.42 BMT with vertical 35mm top hat fixings with membrane to frame Sheet joints: As appearing in elevations. Membrane: Installed in accordance to manufacturer's recommendation Accessories: Propriety Internal & External corners, flashings, joiners, cavity vent strip to bottom edge.	External walls - refer Elevations				
CLD004	INSULATED PANEL CLADDING	Manufacturer: Kingspan Range: KS1000RW Trapazoidal Wall Panel throuhg fixed to girts Finish: Mix of 3 standard colours in vertical banding as indicated in Elevations Core thickness: 100mm + profile Colour: tbc Installed in accordance to manufacturer's recommendation Accessories: Propriety Internal & External corners, flashings, joiners, Refer to Section J Report	External walls - refer Elevations				

KEYNOTE CODE	KEYNOTE DESCRIPTION	PRODUCT DESCRIPTION	LOCATION IN PROJECT	SUPPLIER DETAILS	WARRANTY	COMMENTS/ APPLICATION	INDICATIVE IMAGE
CLD005	DANPALON - SINGLE GLAZED TRANSLUCENT CLADDING	Manufacturer: Danpalon Range: Microcell polycarbonate glazing panels DP16 Finish:Where @ high level - 30% Opal, 30% Dark Opal, 20% Blue, 10% Premium Purple. All other locations Dark Opal Thickness: 16mm Colour: tbc Framing: Fixed to wall girts with aluminium connector as per manufacturers details. Connector size to suit spans and wind loading Installed in accordance to manufacturer's recommendation Accessories: End caps to junctions Non acetic silicone seal to junctions where downpipe stand off brackets penetrate sheet joins	External walls - refer Elevations			Refer to Section J Report	
CLD006	PRECAST CONCRETE	Precast concrete 'dado' wall - CLASS 2 FINISH Refer to Structural Engineer Clear sealer to external side	External walls - refer Elevations				
D04	HINGED DOOR - SOLID CORE LEAF DOUBLE GLAZED SWING DOOR IN STEEL FRAME	Solid core door 40mm Frame to suit wall thickness Refer to door schedule for hardware requirements and finish Frame & Colour: PNT005 Hardware height in accordance with AS1428.1 Note threshold drain to exterior Painted timber reveals refer details	External doors				
D06	HINGED DOUBLE DOOR - SOLID CORE LEAFS IN STEEL FRAME	Solid core doors 40mm Frame to suit wall thickness Refer to door schedule for hardware requirements and finish Frame Colour: PNT005 Hardware height in accordance with AS1428.1 Note threshold drain to exterior Painted timber reveals refer details	External doors				
D03	ALUMINIUM FRAMED GLAZING - AUTOMATED SLIDING DOOR	FRAMING SYSTEM: Alspec Swan Evo 101.6mm Flush Glazed Frame Subsill/Sub head used where required. GLS001 Unless noted otherwise within window schedule Powdercoat finish to frame Overhead automated door operator Frame Colour - PDC001 Painted timber reveals refer details Note threshold drain to exterior	Tenancy entry doors			Fire rated in accordance with Fire Engineering. Refer Certifier report and Fire Engineering PBDB	

KEYNOTE CODE	KEYNOTE DESCRIPTION	PRODUCT DESCRIPTION	LOCATION IN PROJECT	SUPPLIER DETAILS	WARRANTY	COMMENTS/ APPLICATION	INDICATIVE IMAGE
D01, D02	ALUMINIUM FRAMED GLAZING - GLAZED DOUBLE DOOR	FRAMING SYSTEM: Alspec Macarthur EVO 101.6mm Flush Glazed Frame Subsill/Sub head used where required. GLS001 Unless noted otherwise within window schedule Powdercoat finish to frame Overhead automated door operator Frame Colour - PDC001 Painted timber reveals refer details Note threshold drain to exterior	External doors within glazing suites				
D07	ROLLER DOOR - MANUAL	B&D Industrial Roll-a-door. Refer door schedule for size. HMR MDF LAM01 enclosure to drum with removable front to prevent dust collection. With manual winding chain and chain stay. Xtratec Xtra-Lok 2A Internal Roller Door Lock (galvanised), including fixings. HDG angle steel guard to jamb Finish: to match PDC003. Note threshold drain to exterior	Loading area				
D08	PUSH BUTTON SLIDER - SOLID CORE LEAFS IN STEEL FRAME	Solid core door 40mm Frame to suit wall thickness Refer to door schedule for hardware requirements and finish Frame & Colour: PNT005 Hardware height in accordance with AS1428.1 Note threshold drain to exterior Painted timber reveals refer details Overhead automated door operator					
D09	TOP HUNG BI-FOLD DOOR	TOP HUNG BIFOLD DOOR FRAMING SYSTEM: Alspec Hawkesbury 101.6mm Flush Glazed Frame Subsill/Sub head used where required. GLS001 Unless noted otherwise within window schedule Powdercoat finish to frame Overhead automated door operator Frame Colour - PDC001 Painted timber reveals refer details Note threshold drain to exterior					
D13	TOILET PARTITION DOOR	Proprietary toilet cubicle partition system. Refer to wet area scheduling for partition system details.	Amenities				

KEYNOTE CODE	KEYNOTE DESCRIPTION	PRODUCT DESCRIPTION	LOCATION IN PROJECT	SUPPLIER DETAILS	WARRANTY	COMMENTS/ APPLICATION	INDICATIVE IMAGE
GLS001	GENERAL EXTERNAL GLASS	Toughened laminated glazing to meet AS 1288 requirements. Glass to be certified Grade A safety glass as defined in AS2208 Thickness - 6.38mm for partition walls Colour - Clear SHGC - 0.54/0.47 U value - 4.8/4.7 Viridian EVantage Clear (all areas UNO) All glass to be Grade A safety rated. Glazing to be in accordance with ADG-1132	Generally			Refer to NCC 2022 Section J (Energy Efficiency) Report	
GLS002	SLIDING DOOR GLASS	Toughened laminated glazing to meet AS 1288 requirements. Glass to be certified Grade A safety glass as defined in AS2208 Thickness - 10-16mm for sliding door Colour - Clear SHGC - 0.54/0.47 U value - 4.8/4.7 Viridian EVantage Clear (all areas UNO) All glass to be Grade A safety rated. Glazing to be in accordance with ADG-1132	Sliding entry door			Refer to NCC 2022 Section J (Energy Efficiency) Report	
GLZ001	ALUMINIUM FRAMED GLAZING	FRAMING SYSTEM: Macarthur EVO 101.6mm Flush Glazed Frame Subsill/Sub head used where required. GLS001 Unless noted otherwise within window schedule Powdercoat finish to frame Frame Colour - PDC001 Painted timber reveals refer details	Generally				
RPM001	INSULATED ROOF PANEL	Manufacturer: Kingspan Range: KS1000RW Trapazoidal Roof Panel Finish: tbc Core thickness: 100mm + profile Colour: tbc Installed in accordance to manufacturer's recommendation Accessories: Propriety Internal & External corners, flashings, joiners, Refer to Section J Report	Roof			Refer to NCC 2022 Section J (Energy Efficiency) Report	
RPM002	COLORBOND METAL CAPPING	Folded colour bonded steel flashing. Colour: tbc Fixings to be colour matched. BMT to be tested & presented to Architect requirement in selection is to achieve minimal oil canning.	Generally				
RPM003	FLASHINGS GENERALLY	Folded colour bonded steel flashings as required. Colour: Colorbond tbc All fixings to be colour matched. BMT to be tested & presented to Architect requirement in selection is to achieve minimal oil canning.	Generally				

SKYGATE PLAY SKG26 BUILDING 345, 346


KEYNOTE CODE	KEYNOTE DESCRIPTION	PRODUCT DESCRIPTION	LOCATION IN PROJECT	SUPPLIER DETAILS	WARRANTY	COMMENTS/ APPLICATION	INDICATIVE IMAGE
RSS001	ROOF SAFETY SYSTEM	Sayfa LD402 - Roof Mount Ladder Bracket, metal deck static line and strop system or agreed equivalent. System designed and certified by specialist. Access ladders between lower and upper roof to be foldable with access platform.	Roof				
WPM001	MEMBRANE SHEETING	General class 2 building wrap. 0.9/0.03 Example Systems: James Hardie - Hardie Wrap - Weather barrier	Generally			Refer to NCC 2022 Section J (Energy Efficiency) Report	
WPM003	LIQUID MEMBRANE (WET AREAS)	NOTE: Water proof membrane to be applied above screed layer and below tiling. Water proofing to continue under wall tiles Example system: ARDEX Multiprime (under screed) ARDEX WPM 155 RAPID PLUS	Wet areas				
WPM005	UNDERSLAB WATERPROOFING	Under slab vapour barrier 200 MICRONS POLYTHENE PLASTIC SHEETING	Under slab				

KEYNOTE CODE	KEYNOTE DESCRIPTION	PRODUCT DESCRIPTION	LOCATION IN PROJECT	SUPPLIER DETAILS	WARRANTY	COMMENTS/ APPLICATION	INDICATIVE IMAGE
3. INSULATION							
INS090	INSULATION - WALLS	90mm Glasswool Partition batts – R2.0 Bradford Gold Wall Batt Batts or agreed equivalent				Refer to NCC 2022 Section J (Energy Efficiency) Report	


KEYNOTE CODE	KEYNOTE DESCRIPTION	PRODUCT DESCRIPTION	LOCATION IN PROJECT	SUPPLIER DETAILS	WARRANTY	COMMENTS/ APPLICATION	INDICATIVE IMAGE
4. LININGS							
INL001	FIBRE CEMENT	James Hardie - Villaboard 9mm fibre cement To be group rating 1					
INL002	MOISTURE RESISTANT FLUSH PLASTERBOARD	CSR - Gyprock Aquachek Plasterboard CD 13mm or agreed equiv. Flush plasterboard To use recycled paper linings.	Amenities, wet areas				


KEYNOTE CODE	KEYNOTE DESCRIPTION	PRODUCT DESCRIPTION	LOCATION IN PROJECT	SUPPLIER DETAILS	WARRANTY	COMMENTS/ APPLICATION	INDICATIVE IMAGE
5. PARTITIONS							
WT001	WALL TYPE 1 - INTERNAL PARTITION (WET AREA)	Side 1 lining : INL002 Stud: 92mm steel stud - INS090 Side 2 lining : INL002					
WT101	EXTERNAL WALL TYPE 1	Precast concrete (refer to Structural Eng) Stud: 92mm steel stud w/ INS090 Lining : INL001				Refer to NCC 2022 Section J (Energy Efficiency) Report	
WT102	EXTERNAL WALL TYPE 2	Side 1 lining : CLD001 Barrier: WPM001 Stud: 92mm steel stud w/ INS090 Lining : INL001				Refer to NCC 2022 Section J (Energy Efficiency) Report	
WT103	EXTERNAL WALL TYPE 3	Side 1 lining : CLD003 Barrier: WPM001 Stud: 92mm steel stud w/ INS090 Lining : INL001				Refer to NCC 2022 Section J (Energy Efficiency) Report	
WT104	EXTERNAL WALL TYPE 4	Side 1 lining : CLD001 Barrier: WPM001 Stud: 92mm steel stud Lining : CLD004					
WT105	EXTERNAL WALL TYPE 5 -FIRE RATED WALL	Side 1 lining : INL001 Stud: 92mm steel stud w/ INS090 Precast concrete (refer to Structural Eng) Stud: 92mm steel stud w/ INS090 Side 1 lining : INL001	Tenancy division wall			To achieve 90/90/90 fire separation. Refer Fire Engineer	


KEYNOTE CODE	KEYNOTE DESCRIPTION	PRODUCT DESCRIPTION	LOCATION IN PROJECT	SUPPLIER DETAILS	WARRANTY	COMMENTS/ APPLICATION	INDICATIVE IMAGE
6. CEILINGS & SOFFITS							
CFL01	FLUSH PLASTERBOARD CEILING INCLUDING BULKHEADS	CSR - Gyprock Aquachek Plasterboard CD 13mm or agreed equiv. Flush plasterboard To use recycled paper linings. Flush set to all junctions UNO Framing - Fixed to ceiling battens suspended from roof purlins as required to Eng details Finish - Refer to reflected ceiling plan.	Amenities, Wet areas			Refer to NCC 2022 Section J (Energy Efficiency) Report	
CFL02	BATTEN FIXED FIBRE CEMENT SOFFIT	Manufacturer: James Hardie compressed fibre cement board with expressed joint and rear batten with backing strip Range: Exotec Finish: Prefinished to all sides Colour: tbc Thickness: 9mm + 35mm tophats with membrane to frame Sheet joints: As appearing in RCP's Installed in accordance to manufacturer's recommendation including gasket and backing strips Accessories: Proprietary Internal & External corners, flashings, joiners.	Raked soffit generally				
CFL03	FLUSH FIRE RATED CEILING	CSR - Gyprock Fyrecek Plasterboard 2x 16mm or agreed equiv. to achieve 120/120/120 fire rating Flush set to all junctions UNO Framing - Fixed to ceiling battens suspended from roof purlins as required to Eng details Finish - Refer to reflected ceiling plan.	Service Enclosure				


KEYNOTE CODE	KEYNOTE DESCRIPTION	PRODUCT DESCRIPTION	LOCATION IN PROJECT	SUPPLIER DETAILS	WARRANTY	COMMENTS/ APPLICATION	INDICATIVE IMAGE
7. FLOOR & WALL FINISHES							
M-FLT1	WET AREA TILES - FLOOR	Metz - Bergamo Beige Range: Bergamo Colour: Beige Finish: Natural Grout: Ardex EG 15 Epoxy Grout - Magellan Grey Grout Thickness: As per manufacturer recommendation Slip Rating: P3 Dimensions: 600x600x8.5mm Laid Square WPM003 waterproof membrane	Amenties		1 Year (If Metz do not complete install)		
M-FLT2	WET AREA TILES - FLOOR	Metz - Bergamo Beige Range: Bergamo Colour: Beige Finish: Micro Grip Grout: Ardex EG 15 Epoxy Grout - Magellan Grey Grout Thickness: As per manufacturer recommendation Slip Rating: P5 Dimensions: 600x600x8.5mm Laid Square WPM003 waterproof membrane	PWD		1 Year (If Metz do not complete install)		
M-VNL1	SHEET VINYL- FLOOR	Forbo - Sphera Subfloor prep: Manufacturers Instructions Product Name: Sphera Energetic Product Colour: 50236 Thyme Slip Rating: P3 Adhesive: Manufacturers Instructions Dimensions: 2000mm x <27000mm x 2mm Skirting: 200H coved skirt with 35mm radius to walls. Surface Preparation: Waterproof membrane applied over screen or structural slab. WPM002 or agreed equiv. Skim coat ARDEX Feather Finish or agreed equiv. to structural slab to achieve a homogenous smooth finish (1.5mm thk Nom). Installed to manufacturer's recommendations. Where applied over screeded falls screed to have WPM003 between structural floor and screed	Parents Room			Install in accordance with manufacturers recommendations and Australian Standards	


SKYGATE PLAY SKG26 BUILDING 345, 346

KEYNOTE CODE	KEYNOTE DESCRIPTION	PRODUCT DESCRIPTION	LOCATION IN PROJECT	SUPPLIER DETAILS	WARRANTY	COMMENTS/ APPLICATION	INDICATIVE IMAGE
M-TIL1	Wall Tile	National Tiles - Rectified White Matt Tile MATT MAXWP009 300 x 600mm White, Matt Ardex EG 15 Epoxy Grout - Misty Grey Keep compressed adhesive to 8mm thickness (excluding Parents Room) - Tiles to sit flush with skirting wall tile	Ameneities	National Tiles Jacqui Buyn 0449808142 jbuyn@nationaltiles.com.au		Generally from top of skirting to 1300mm AFFL In PWDs: from top of skirting to 2100AFFL	
SKT001	COVED VINYL SKIRTING	Coved homeogenous vinyl skirting 100h, to match flooring	Generally				
SKT002	ALUMINIUM FLUSH SKIRTING	-Timber Radiata pine. -Size (h x t) (mm): 68 x 12mm. -Profile: Bull nose or splayed.	To all internal wall unless noted otherwise				

KEYNOTE CODE	KEYNOTE DESCRIPTION	PRODUCT DESCRIPTION	LOCATION IN PROJECT	SUPPLIER DETAILS	WARRANTY	COMMENTS/ APPLICATION	INDICATIVE IMAGE
8. PAINT & POWDERCOAT FINISHES							
PDC001	POWDER COATED FINISH - GLAZING FRAMING	Dulux - Duratec Elements TBC Monument Flat 9E17724F	Glazing framing generally				
PDC003	POWDER COATED FINISH - SCREENS	Dulux - Duratec Elements TBC Monument Flat 9E17724F	Gates and Screens				
M-PDC1	Powdercoat	Dulux Duralloy 2721139M White Matt		M-TRM1	Dulux Alison Sayce 0423 783 989 alison.sayce@d ulux.com.au		
PNT001	PAINT SYSTEM 02 - EXTERNAL WALL PAINT - HIGH LEVEL	Primer: AUDU00148 Dulux 1 Step Prep 1st Coat: AUDD0053 Dulux Weathershield Low Sheen 2nd Coat: AUDD0053 Dulux Weathershield Low Sheen 3rd Coat: Dulux Surfaceshield FP Graffiti Resistant Coating Install as per manufacturer's recommendations Colour: TBC Colorbond Monument UNO LRV: 8 CODE: N/A To be <50g/L VOC	GENERAL USE ON EXTERNAL FC WALLS				
PNT002	PAINT SYSTEM 03 - EXTERNAL SOFFIT PAINT - GENERAL	Primer: AUDU00148 Dulux 1 Step Prep 1st Coat: AUDD0053 Dulux Weathershield Low Sheen 2nd Coat: AUDD0053 Dulux Weathershield Low Sheen 3rd Coat: Dulux Surfaceshield FP Graffiti Resistant Coating Install as per manufacturer's recommendations Colour: TBC Cobbler LRV: 46 SA: 0.58 CODE: S14E4 To be <50g/L VOC	GENERAL USE ON EXTERNAL FC SOFFITS				

KEYNOTE CODE	KEYNOTE DESCRIPTION	PRODUCT DESCRIPTION	LOCATION IN PROJECT	SUPPLIER DETAILS	WARRANTY	COMMENTS/ APPLICATION	INDICATIVE IMAGE
PNT003	PAINT SYSTEM 04 - INTERNAL PAINT - GENERAL WALLS & CEILING	Primer AU_DD02680 Dulux Enviro2 Interior Acrylic Sealer Undercoat 1st Coat AU_DD02681 Dulux Enviro2 Interior Low Sheen 2nd Coat AU_DD02681 Dulux Enviro2 Interior Low Sheen Install as per manufacturer's recommendations Colour - TBC White Duck Quarter LRV - 78 SA - 0.293 CODE - S16B1Q To be <50g/L VOC	GENERAL USE ON INTERNAL WALLS				
PNT004	PAINT SYSTEM 05 - INTERNAL PAINT - TIMBER DOOR TRIMS & TIMBER DOORS	Primer AU_DD02680 Dulux Enviro2 Interior Acrylic Sealer Undercoat 1st Coat AU_DD02681 Dulux Enviro2 Interior Semi-gloss 2nd Coat AU_DD02681 Dulux Enviro2 Interior Semi-gloss Install as per manufacturer's recommendations Colour: TBC Colorbond Monument UNO LRV: 8 CODE: N/A	GENERAL USE ON INTERNAL TRIMS & TIMBER DOORS				
PNT100	MICACEOUS IRON OXIDE	Micaceous iron oxide paint system 1st Coat - 75 um Luxaprime ZP single pack etch primer 2nd Coat - 125um Murabond - Bridge Paint 3rd Coat - 125um Murabond - Bridge Paint Surface preparation and paint system to be installed as per manufacturer specifications. Colour: Jute TBC	All exposed external structural steel (ie awning supports)				

KEYNOTE CODE	KEYNOTE DESCRIPTION	PRODUCT DESCRIPTION	LOCATION IN PROJECT	SUPPLIER DETAILS	WARRANTY	COMMENTS/ APPLICATION	INDICATIVE IMAGE
9. METALWORK							
G01	HINGED SINGLE GATE - ALUMINIUM BATTENS IN FRAME	Welded aluminium angle gate Egress hardware Refer SCR001 for blade spacing, size and finish.	Services Enclosure			Note: Contractor and metalwork fabricators are responsible for structural adequacy and certification of aluminium screen system/s	
SCR001	ALUMINIUM LOUVRE SCREEN TYPE 1	Louvreclad - Horizontal Swaged Louvre blade fixed in front of box section frame Louvreclad Mirage Series Combination MSS-32360/160-30 or equivalent 87% Free open area. Finish - PDC03 Louvers to run continuous in front of supporting framing around corners with mitred joints. REFER TO DETAILS for additional information	Generally			Note: Contractor and metalwork fabricators are responsible for structural adequacy and certification of aluminium screen system/s	
M-TRM1	Wall & Floor Tile Trim	Angle Aluminum M-PDC1	Wall & Floor Tile Trim	BAT Trims Kylie Wyatt 07 3482 2175 batqld@battrims.com			
M-TRM2	Corner Trim	Mosaic Corner Angle MCA-8-3-(ALA) Stainless Steel 8.5mm - Continuous, Full height	Corner Trim	BAT Trims Kylie Wyatt 07 3482 2175 batqld@battrims.com			

KEYNOTE CODE	KEYNOTE DESCRIPTION	PRODUCT DESCRIPTION	LOCATION IN PROJECT	SUPPLIER DETAILS	WARRANTY	COMMENTS/ APPLICATION	INDICATIVE IMAGE
10. SIGNAGE							
SGN-AMB	SIGNAGE: AMBULANT TOILET	Statutory signage to amenities as required MPL Signage - Basics Range - Charcoal Or agreed equivalent To be on charcoal coloured background with white lettering and white pictorgraphics. Sign to be located 1200-1600mm AFFL with Braille line at 1250mm To comply with BCA clause D4D7 and specification D4D7	MPL Signage or Similar			The installation of the sign must be between 1200mm and 1600mm above the floor or ground. If the sign has a single line of characters the tactile characters must be between 1250mm and 1350mm above the floor or ground. The sign must be located on the wall on the same side as the door handle, and the leading edge of the sign should be located between 50mm and 300mm from the architrave. If there is insufficient space on the door handle side of the door the sign may be installed on the opposite side. If it is not possible to install the sign on either side of the door the sign may be installed on the door itself.	 
SGN-BC	SIGNAGE: BABY CHANGE						
SGN-F	SIGNAGE: FEMALE TOILET						
SGN-M	SIGNAGE: FEMALE TOILET						
SGN-PWD	SIGNAGE: ALL GENDER ACCESSIBLE TOILET & SHOWER						
SGN-PB	SIGNAGE: Push Button to Open	Push Button to Open Black writing on white background 200mmx90mm	Located above all automatic door Push Button To Parent Room Door	Braille Tactile Signs Aust			
SGN011	BUILDING SIGNAGE	TENANT SIGNAGE (TBC)					

KEYNOTE CODE	KEYNOTE DESCRIPTION	PRODUCT DESCRIPTION	LOCATION IN PROJECT	SUPPLIER DETAILS	WARRANTY	COMMENTS/ APPLICATION	INDICATIVE IMAGE
11. FIXTURES, FITTINGS AND EQUIPMENT							
BOL001	BOLLARD	Bollard to be 304 stainless steel proprietary products that are weather resistant and of low maintenance design in	Loading area				
BOL002	BOLLARD REMOVABLE	Sleeved and removable bollard to be 304 stainless steel proprietary product that are weather resistant and of low	Loading area near roller door				
BCM1	Baby Change Mat	Saftey Belt - KoalaKare Strap Nylon Adjusting saftey for change table Code: 885-KIT Provide anchor points to benchtops (new and existing) with stainless steel bolt to the full thickness of the substrate and install lock nut under	Baby change tables			To be coordinated with F-BCT1 joinery	
SFB1	Safety Belt	Saftey Belt - KoalaKare Strap Nylon Adjusting saftey for change table Code: 885-KIT Provide anchor points to benchtops (new and existing) with stainless steel bolt to the full thickness of the substrate and install lock nut under	Baby change tables	Koala	5 Year	To be coordinated with F-BCT1 joinery	
BCT1	Baby Change Table - Fold Down	Koala Kare Horizontal Baby Change Table Stainless Veneer White Granite Code: KB300-05SS	PWD - Gameover	Koala	6 Year	Ensure adequate support is added to partitions	

KEYNOTE CODE	KEYNOTE DESCRIPTION	PRODUCT DESCRIPTION	LOCATION IN PROJECT	SUPPLIER DETAILS	WARRANTY	COMMENTS/ APPLICATION	INDICATIVE IMAGE
BIN1	Waste Bin - Recessed	Waste Bin 45.5L - Completely Recessed, White Piatto Collection Code: 10-6474-00 Colour: White Dimensions: 440mm W x 1018mmH x 170mmD	Amenities	ASI JD Macdonlad	1 Year	Installation to comply with AS 1428.1 Ensure adequate support is added to existing partitions to suit install	
BIN2	Nappy Bin - In cupboard	TBC	Parents Room - Baby Change Joinery			To fit joinery cupboard - refer architectural drawings for dimensions	
CH1	Coat Robe Hook and Door Stop	Dolphin Robe Hooke and Door Stop Code: BC406 Colour: Stainless Steel Dimensions: 50x76mm	Amenities	Dolphin	1 Year	Installation to comply with AS 1428.1	
CT1	Curtain track - privacy screen (straight)	Hand Operated Curtain Track System Code: SG6465 with Wave Roller Grider 36H mm x 14W mm	Parents Room - Breastfeeding Rooms	Silent Gliss		Surface mounted to perimeter ceiling. Allow for additional support in ceiling space as required	
MCT1	Privacy Curtain	Privacy Curtain Fabric - Mist 80mm Wave Fold with double fullness Code: Mist 511524 Colour: 015 Agave	Parents Room - Breastfeeding Rooms	Kvadrat Maharam Katie King 0481 387 371 kaki@kvdratmaharam.com		Curtain to extend full opening of doorway to feeding space from track to 10mm off the finished floor	

KEYNOTE CODE	KEYNOTE DESCRIPTION	PRODUCT DESCRIPTION	LOCATION IN PROJECT	SUPPLIER DETAILS	WARRANTY	COMMENTS/ APPLICATION	INDICATIVE IMAGE
CT2	Curtain track - shower (L)	TBC	PWD Shower				
MCT2	Shower Curtain	TBC	PWD Shower				
FC1	Furniture: Chair	Stylecraft - Monk Armchair 730mm x 610mm x 640mm Upholstery: M-FB1 Fabric - Lariat (Kvadrat Maharam) Code: 440401 Colour: 046 Reseda	Parents Room - Breastfeeding Rooms	Stylecraft Furniture	2 Years: Workable Components 10 Years: Structural Components	Provisional selection, subject to review by BAC	
FC2	Furniture: Occasional Table	Ostoa Coffee & Side Table Central Column	Parents Room - Breastfeeding Rooms	Stylecraft Furniture	Structural warranty 5 year	Provisional selection, subject to review by BAC	
GR1	Grab Rail - Ambulant	Care Support Grab Rail 90 Degree Code: 687460SS Colour: Stainless Steel Dimensions: 450 x 450mm	Ambulant Toilets	Caroma / GWA Group	20 years replacement product 1 year - Labour, Finishes	Installation to comply with AS 1428.1	

SKYGATE PLAY SKG26 BUILDING 345, 346

KEYNOTE CODE	KEYNOTE DESCRIPTION	PRODUCT DESCRIPTION	LOCATION IN PROJECT	SUPPLIER DETAILS	WARRANTY	COMMENTS/ APPLICATION	INDICATIVE IMAGE
GR3	Grab Rail - PWD	Care Support Grab Rail - 90 Degree 1110x1030x600 - LH Code: 687467SS Colour: Stainless Steel Dimensions: 1110x1030x600	PWD	Caroma / GWA Group	20 years replacement product 1 year - Labour, Finishes	Installation to comply with AS 1428.1	
HD1	Wall Mounted Hand Dryer	Dyson Airblade V Hand Dryer AB12 - Sprayed nickel (72db)	PWD	Dyson	5 Year	To be mounted at height to comply with AS1428.1	
MR1	All-In-One Mirror Unit	All-in-one mirror unit - Dpohin Alavo - custom design Alavo - Premium System Soap Dispenser + Dryer in mirror unit M-LAM1 to unit box M-TM1 to edge 50mm Radius rounded corners Soap Dispenser: Dolphin Pre-filled cartridge	Amenities	Dolphin	2 Years: Workable Components 10 Years: Structural Components	Wall to be lined 18mm ply in-between studs for entirety of mirror cabinets (MR1) and vanity (WP1)	
MR2	Mirror (610 x 990)	Mirror, Frameless – Stainless Steel 10-8026-2439 – 610 wide x 990 high (Accessible Compliant)	PWD	ASI JD Macdonlad	1 Year	To be installed to comply to AS1428.1-2009 and Changing Places specification requirements	

KEYNOTE CODE	KEYNOTE DESCRIPTION	PRODUCT DESCRIPTION	LOCATION IN PROJECT	SUPPLIER DETAILS	WARRANTY	COMMENTS/ APPLICATION	INDICATIVE IMAGE
MR3	Mirror (610 x 1800)	Mirror, Frameless – Stainless Steel 610 wide x 1800 high	Breastfeeding Rooms		2 Year		
MW1	Microwave	Panasonic Genius Microwave 32L 1100W Code: NN-ST665B Colour: Black Glass / Stainless Steel Dimensions: 525W x 310H x 388D	Parents Room	Panasonic	1 Year	Safe Operation label to be included. 100 clear all round for ventilation and 150mm from all basins (AS3000)	
SD1	Soap Dispenser, sensor, hob mounted	Liano II – Sensor Hob Mounted Soap Dispenser – Brushed Nickel Product Code: 96390BN Colour: Brushed Nickel Dimensions: 110x90x28Dia	Parents Room	Caroma / GWA Group	20 years replacement product 1 year - Labour, Finishes	Installation to comply with AS 1428.1, for example reach distance. Include space for soap pump, and access to controls, power supply and soap bottle for refilling.	
SD3	Soap Dispenser, sensor, wall mounted	Tork Soap Dispenser - Sensor Code: 561600 Colour: white Dimensions: 128L x 112W x 278H mm	PWD	Tork		Installation to comply with AS 1428.1, for example reach distance. Power supply required. Include space for soap pump	

KEYNOTE CODE	KEYNOTE DESCRIPTION	PRODUCT DESCRIPTION	LOCATION IN PROJECT	SUPPLIER DETAILS	WARRANTY	COMMENTS/ APPLICATION	INDICATIVE IMAGE
SHS1	Folding Shower Seat	Surface Mounted Folding Shower Seat Code: 9562-40 Colour: Stainless Steel / White Seat Dimensions: 960mm W x 406mm projection (when in use)	PWD	Bradley Australia		Note: Ensure sufficient noggins in wall to support weight Installation to comply with AS 1428.1	
SSD1	Soap Dish	Stainless Steel Soap Dish Code: R021-LH Colour: Stainless Steel Dimensions: 160x125mm	PWD	Bradley Australia		NB: No hole to soap dish Installation to comply with AS 1428.1	
THR1	Toilet Roll Holder	JDMacdonald Twin 9 - Jumbo - Surface Mounted Product Code: 10-0040 Finish:Stainless Steel	Female & Male Amenities	JDMacdonald	1 Year	Holds two 229 mm diameter rolls of 57 or 76 mm diameter core. When one roll is depleted, slide panel to expose other roll. Door cabinet and mounting plate fabricated of 18 gauge type 304 stainless steel with a satin finish. Two viewing slots reveal toilet paper rolls inside. Equipped with tumbler lock.	
TRH2	Toilet Roll Holder	Toilet Paper Dispenser, Shelf - Surface Mounted Product Code: 10-0697-GAL Finish: Stainless Steel	Ambulant & PWD amenities	JDMacdonald		Holds two (2) 127 mm dia. rolls of 1500 sheets or standard toilet paper rolls and includes a 127 mm x 457 mm stainless steel shelf with 16 mm hemmed lip on front edge Installation to comply with AS 1428.1	


KEYNOTE CODE	KEYNOTE DESCRIPTION	PRODUCT DESCRIPTION	LOCATION IN PROJECT	SUPPLIER DETAILS	WARRANTY	COMMENTS/ APPLICATION	INDICATIVE IMAGE
12. JOINERY							
BCT1	JOINERY: Custom Joinery Unit with Scalloped Change Table embedded in design	Custom Joinery Unit with Scalloped Change Table embedded in design Benchtop Material: M-SLS1 Joinery Material:: M-LAM1	Parents Room Baby Change	Corian	2 Years: Workable Components 10 Years: Structural Components	Scalloped change table top, complete with SFB1 and BCM1 ap to be fitted to Washplane.	
TP3	Toilet Partitions	Compact laminate Floor Mounted Partition System Range: Basic Colour: M-LAM3 Dimensions: 2100H, 2100mmH head height, partition to sit 200mm AFFL Hardware: KB Series (with Metlam 300_MORT60_SCP Series Lockset and 300 Series Ambulant, Metlam 202C Coathook) / Anodised Aluminium 106C Gravity Hinge - Satin Chrome Plate Hinges	Amenities	Kirkbuild	Defect/ workmanship warranty – 12 months Structure Board – 7 years Hardware – 12 months		
JNR-BS	JOINERY: Custom benchseat	Custom bench seat joinery with upholstered cushion and back Joinery Finish: LAM1 Upholstery Finish:	Parents Room				
JNR-BT	JOINERY: benchtop		Amenities - all vanities				

KEYNOTE CODE	KEYNOTE DESCRIPTION	PRODUCT DESCRIPTION	LOCATION IN PROJECT	SUPPLIER DETAILS	WARRANTY	COMMENTS/ APPLICATION	INDICATIVE IMAGE
JNR-MW	JOINERY: microwave shelves	Above Bench Open Shelves Colour: M-LAM1 Dimensions: refer internal elevations	Parents Room				
UBCD	JOINERY: underbench cupboard, double	Underbench Cupboard Double Door Colour: M-LAM1 Dimensions: refer internal elevations Lockable Finger pull	Amenities & Parents Room - all vanities				
UBCS	JOINERY: underbench cupboard, single	Underbench Cupboard Double Door Colour: M-LAM1 Dimensions: refer internal elevations Lockable Finger pull	Amenities & Parents Room - all vanities				
UBSNK	JOINERY: underbench sink shroud DDA COMPLIANT	Underbench DDA Compliant Sink Shroud Colour: M-LAM1 Dimensions: refer internal elevations	Parents Room - basins				
LAM1	Laminate	Laminate Tasmanian Oak Woodmatt 0.7mm 3650x1360 Polytec Woodmatt Code: 48515 Finish: Woodmatt Colour: Tasmanian Oak Substrate: MR MDF E0 Edge: 1mm matching ABS Decorative Edgetape Installation: Vertical Grain Dimensions: 18mm	To all joinery fronts	Polytec Julie Richardson 0417 914 518 richardsonj@polytec.com.au	7 Years		


SKYGATE PLAY SKG26 BUILDING 345, 346

KEYNOTE CODE	KEYNOTE DESCRIPTION	PRODUCT DESCRIPTION	LOCATION IN PROJECT	SUPPLIER DETAILS	WARRANTY	COMMENTS/ APPLICATION	INDICATIVE IMAGE
LAM3	Compact Laminate	Compact lamiante Tasmanian Oak Polytec Polytec compact lamiante Code: 52507 Finish: Woodmatt Colour: Tasmanian Oak Substrate: compact laminate black core Edge: black Installation: Vertical Grain Dimensions: 13mm thick	To all toilet partitions	Polytec Julie Richardson 0417 914 518 richardsonj@polytec.com.au	8 Years		
M-SLS1	Solids Surface	Corian Solid surface Artista Grey LVR 51	Baby Change Benctop	CASF Ash Mansour 1300 795 044 ash.mansour@casf.com.au	10 Years		
M-FB1	Fabric	Fabric - Lariat (Kvadrat Maharam) Code: 440401 Colour: 046 Reseda	Upholstery to bench seating and furniture	Kvadrat Maharam Katie King 0481 387 371 kaki@kvdratmaharam.com			

KEYNOTE CODE	KEYNOTE DESCRIPTION	PRODUCT DESCRIPTION	LOCATION IN PROJECT	SUPPLIER DETAILS	WARRANTY	COMMENTS/ APPLICATION	INDICATIVE IMAGE
13. MECHANICAL							
ACU001	AC CONDENSER UNIT	Refer mechanical engineer's drawings.					
MEC001	MECHANICAL DUCT REFER MECHANICAL ENGINEER	Refer mechanical engineer's drawings.					
MLV001	MECHANICAL EXHAUST LOUVRE	Refer mechanical engineer's drawings.					

KEYNOTE CODE	KEYNOTE DESCRIPTION	PRODUCT DESCRIPTION	LOCATION IN PROJECT	SUPPLIER DETAILS	WARRANTY	COMMENTS/ APPLICATION	INDICATIVE IMAGE
14. HYDRAULIC							
BS4	BASIN: wall mounted	Urbane II Wall Basin - Left hand shelf (878700W) Right hand shelf (878710W - 1 Taphole Product code: Left hand shelf (878700W) Right hand shelf (878710W) Range:Urban II Colour: White Dimensions: 600 x 440 x 187mm	Amenities	Caroma / GWA Group	Replacement Product : 20 years, Parts and Labour : 1 year	Check drawings to confirm right or left configuration. White plug and chrome flush fitting waste Can be installed to comply to AS1428.1 2021 Design for Access and Mobility requirements	
BS7	BASIN: under counter	Caroma Urbane® II Under Counter Basin (No Tap Hole) Product code: 878500W Range:Urban II Colour: White Dimensions: 10.2 L, 540 x 370 x 187	Amenities	Caroma / GWA Group	Replacement Product : 20 years, Parts and Labour : 1 year	Under Counter	
BT1	Bottle Trap	Caroma Urbane II 40mm Bottle Trap Product Code: 687294BN Colour: Brushed Nickel Dimensions: 345x190mm	PWD	Caroma	1 year replacement product or parts	To be specified with WP1 + WP2 + BS2	
SH1	Shower Set + Grab rail	Care Support Accessible Shower Set with inverted T Rail - RH Product Code: 91127C4E Colour: Chrome Dimensions: 700mm T Grab Rail	PWD	Caroma / GWA Group	20 years replacement product 1 year - Labour, Finishes	Installation to comply with AS 1428.1	
SM1	Shower Mixer	Caroma Care Plus Shower Mixer Standard Handle H/C Accessible Mixer - AS1428.1 compliant Colour: CHROME Code: 91107C	PWD	Caroma	Replacement Product : 2 years, Labour : 1 year	Installation to comply with AS 1428.1	



Rev: 2

KEYNOTE CODE	KEYNOTE DESCRIPTION	PRODUCT DESCRIPTION	LOCATION IN PROJECT	SUPPLIER DETAILS	WARRANTY	COMMENTS/ APPLICATION	INDICATIVE IMAGE
SNK02	SINK: cleaners	Cleaners Sink - with buffer and centre back outlet, no tap holes - 27L Product code: 811592W + 811595 (Bracket 1510) Range: Colour: White Dimensions: 575mm x 435mm	Cleaner's Store	Caroma / GWA Group	Replacement Product : 20 years, Parts and Labour : 1 year	Waste outlet suitable for 50mm Diameter standard waste assemblies	
		C.P Grate - Bucket Grate for Cleaners Sink Product Code: 811593 Colour: Stainless Steel					
		50mm Plug and waste Product Code: 687031 Colour: Stainless Steel waste + Black rubber plug					
T1	WC: standard	Liano Cleanflush® Wall Faced Invisi Series II® Suite - with GERMGARD® Universal trap pan for S or P trap installations Product Code: 766100W Range: Liano Colour: White Dimensions: 570x385mm	Amenities	Caroma / GWA Group	(Toilet Suites) Replacement Product : 20 years, Parts and Labour : 1 year (Seats) 5 year replacement product/parts	Waste outlet suitable for 50mm Diameter standard waste assemblies Flush button FB2	
T2	WC: ambulant	Liano Cleanflush® Invisi Series II® Easy Height Wall Faced Suite with Liano Care Single Flap Seat - White (with GermGard®) Universal trap pan for S or P trap installations Product Code: 766300W Range: Liano Colour: White with White Seat Dimensions: 615x435mm	Amenities	Caroma / GWA Group	(Toilet Suites) Replacement Product : 20 years, Parts and Labour : 1 year (Seats) 5 year replacement product/parts	Flush button FB2	

KEYNOTE CODE	KEYNOTE DESCRIPTION	PRODUCT DESCRIPTION	LOCATION IN PROJECT	SUPPLIER DETAILS	WARRANTY	COMMENTS/ APPLICATION	INDICATIVE IMAGE
T4	WC: universal	Caroma CARE 800 INVISI II Suite, with Backrest Pan: Care 800 back inlet Includes Backrest Curved Arms, D80 fixing pack included NOTE: P or S Trap to be determined Product Code: 718300BAG Range: Care Colour: White, Grey Seat	Amenities	Caroma / GWA Group	(Toilet Suites) Replacement Product : 20 years, Parts and Labour : 1 year (Seats) 5 year replacement product/parts	Flush button FB2	
FB2	FLUSH BUTTON	Invisi Series II Round Dual Flush Plate & Raised Care Buttons Product code: 237086C Range: Invisi II Colour: Chrome Dimensions: 210x110x20mm	To all WCs	Caroma / GWA Group	Replacement Product : 2 years, Labour : 1 year	Installation to comply with AS 1428.1	
FW1	FLOOR WASTE	Floor Waste Mizu Drift Trapscrew Grate Square 100mm Code: 246012 Colour: Brushed Nickel Dimensions: 100x100mm	Showers	Reece	1 Year	Floor waste, point. Localised falls where required. Refer to slab setout and wet area details.	
TP1	TAP: wall mounted sensor tap	Dolphin Sensor Tap - 28mm Dia Product Code: DS 102 Colour: Brushed Nickel Dimension: 230mm x 85mm	Amenities & Parents Room	Dolphin	1 Year		
TP2	TAP: hob mounted sensor tap	Liano II Sensor Hob Product Code: 96393BN6A Colour: Brushed Nickel Dimensions: 210mm x 105mm x 55mm	PWD	Caroma	20 years replacement product 1 year - Labour, Finishes		

KEYNOTE CODE	KEYNOTE DESCRIPTION	PRODUCT DESCRIPTION	LOCATION IN PROJECT	SUPPLIER DETAILS	WARRANTY	COMMENTS/ APPLICATION	INDICATIVE IMAGE
TP6	TAP: wall mounted cleaners sink set	Clark Cross Wall Sink Set Product Code: CL10042.C4A Colour: Chrome Dimensions: 200mm x 170mm	Cleaners	Caroma / GWA Group	10 Years Ceramic disc cartridges parts only, 7 years replacement products or parts, 1 Year replace products/parts and labour		
UR1	URINAL: wall hung urinal with ceiling mounted smart flush sensor	Caroma Torres wall hung urinal (Back Inlet) Product Code: 666102W Range: Torres Colour: White Dimensions: 443x735x390mm	Male Amenities - Game Over	Caroma / GWA Group	Replacement Product : 20 years, Parts and Labour : 1 year Note pairing a Caroma product with another brand/supplier may void the	Smart Flush Hardware to be used with Urinal	
		Smart Flush Hardware: Zip FlushMaster Pearl & Zip FlushMaster Mk.2 Product Code: WS004 Range: Colour:		Zip	1 Year	Refer to manufactures requirements for direct injection	
UR4	URINAL: trough	Regency Urinal Product Code: UREG Length: 3100mm	Male Amenities - Area 51	Britex			
TMV	Thermostatic Mixing Valve in Recessed Lockable Box	Refer hydraulic engineer's drawings.					

KEYNOTE CODE	KEYNOTE DESCRIPTION	PRODUCT DESCRIPTION	LOCATION IN PROJECT	SUPPLIER DETAILS	WARRANTY	COMMENTS/ APPLICATION	INDICATIVE IMAGE
HWU	HOT WATER UNIT	Refer hydraulic engineer's drawings.					
DP	DOWNPIPE TYPE 1	PVC downpipe with colour matched stand off brackets. Colour - TBC Align stand off bracket fixings with Danpalon sheet joins Refer hydraulic engineer's drawings.					
FH	FIRE HYDRANT	Refer hydraulic engineer's drawings.					
FLW003	FLOOR THRESHOLD DRAIN	Stormtech Threshold drainage system 65ARi40MTL or similar Colour - Stainless Steel Size and model to suit door. AS1428.1 compliant.	All external doors				
GT01	EAVES GUTTER	New Colourbond steel gutter fixed to PFC fascia board - refer to drawings Profile- Custom folded gutter detail - Refer to SECTION DETAILS for information. Colour- CLRtbc					
GT02	EAVES GUTTER	Kingspan membrane lined gutter		Kingspan		Installed to manufacturer's recommendation	
VP	VENT PIPE	Refer hydraulic engineer's drawings.					

KEYNOTE CODE	KEYNOTE DESCRIPTION	PRODUCT DESCRIPTION	LOCATION IN PROJECT	SUPPLIER DETAILS	WARRANTY	COMMENTS/ APPLICATION	INDICATIVE IMAGE
15. ELECTRICAL							
GPO1	GPO Single	Accessible' GPO and USB outlet. Large switches for ease of use. Applies to rooms with accessibility considerations, ie.e parent's rooms and PWD toilets. Double socket and USB charger socket to be provided to feeding rooms in Parent's Rooms, above the shelf.	Amenities & Parents Room	Clipsal			SingleDouble  P2015P2025/2
GPO2	GPO Double	Clipsal 'Prestige' Double socket: P2025/2. Single socket (if applicable): P2015. USB charger: P2031VH single vertical wall plate with P30Z-WE mounting adapter and 30USBAM-WE mechanism White Electric (WE)					
GPOC	GPO Single, Cleaners	Single plates: 73 x 116 mm. Square (double) plates: 116 x 116 mm.					