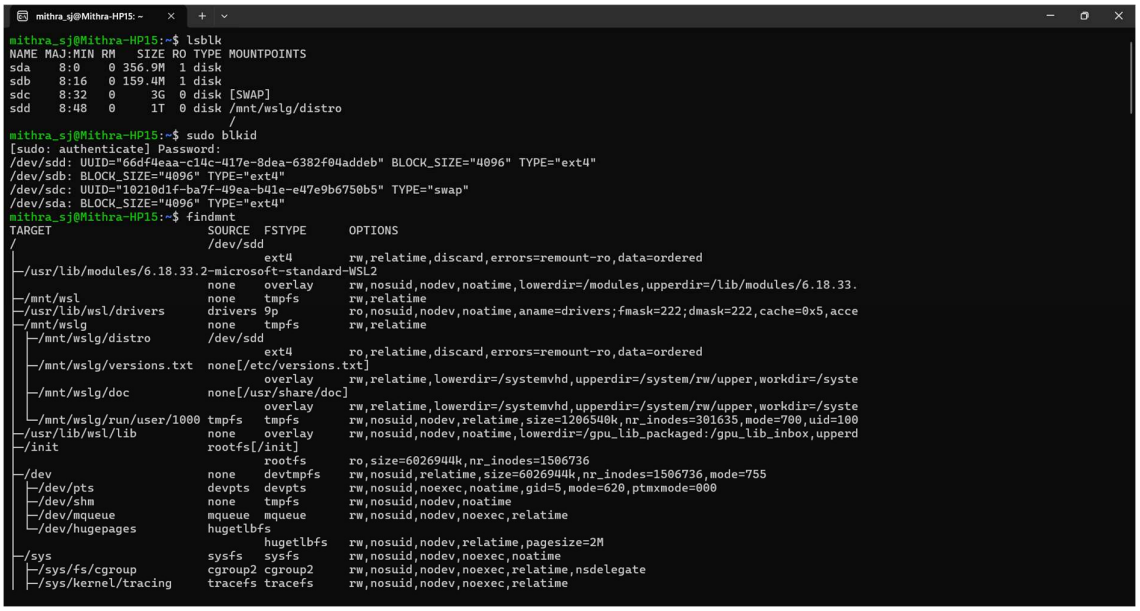
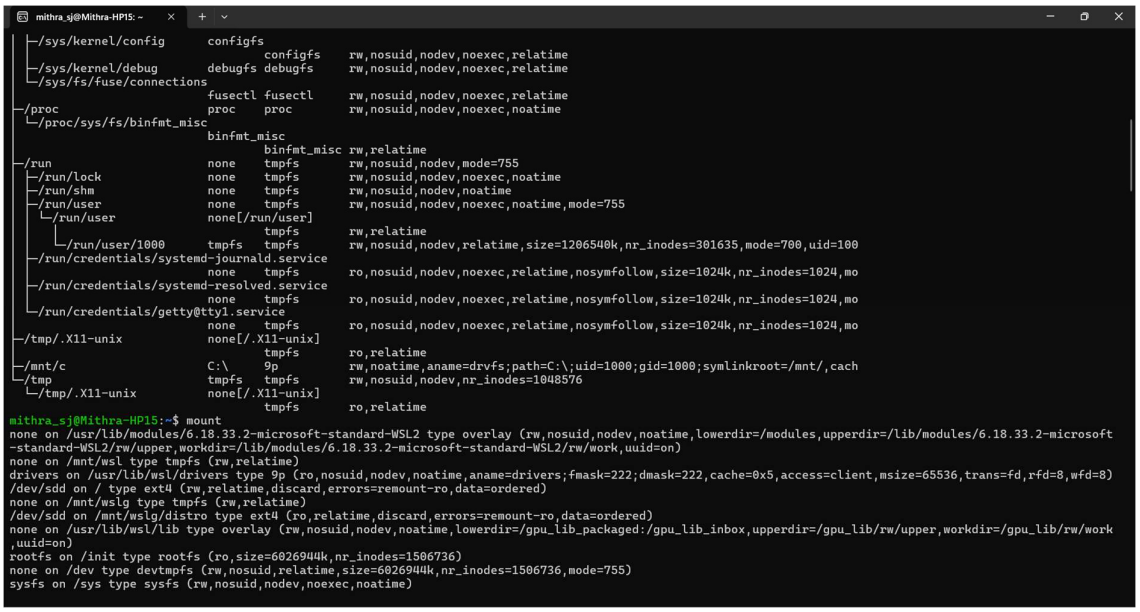
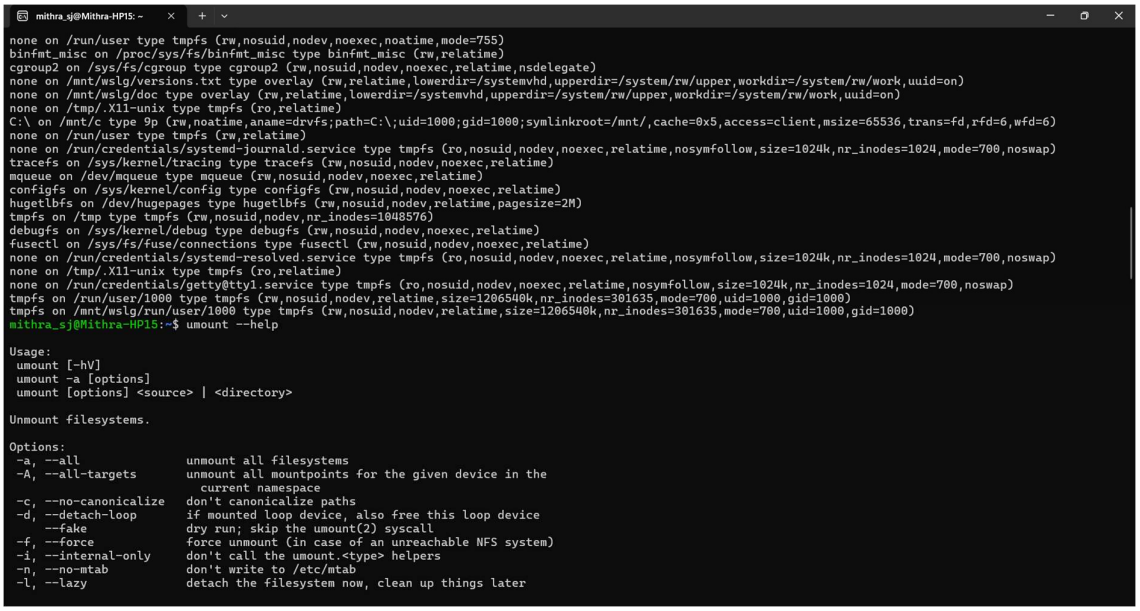
10 Linux Commands (29-10-2026)

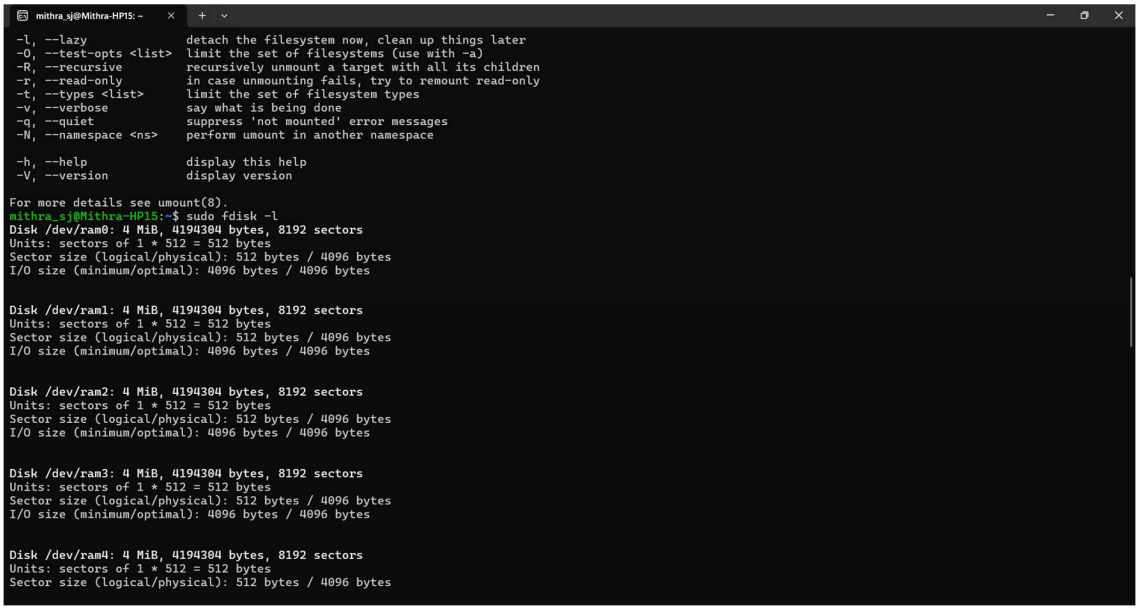


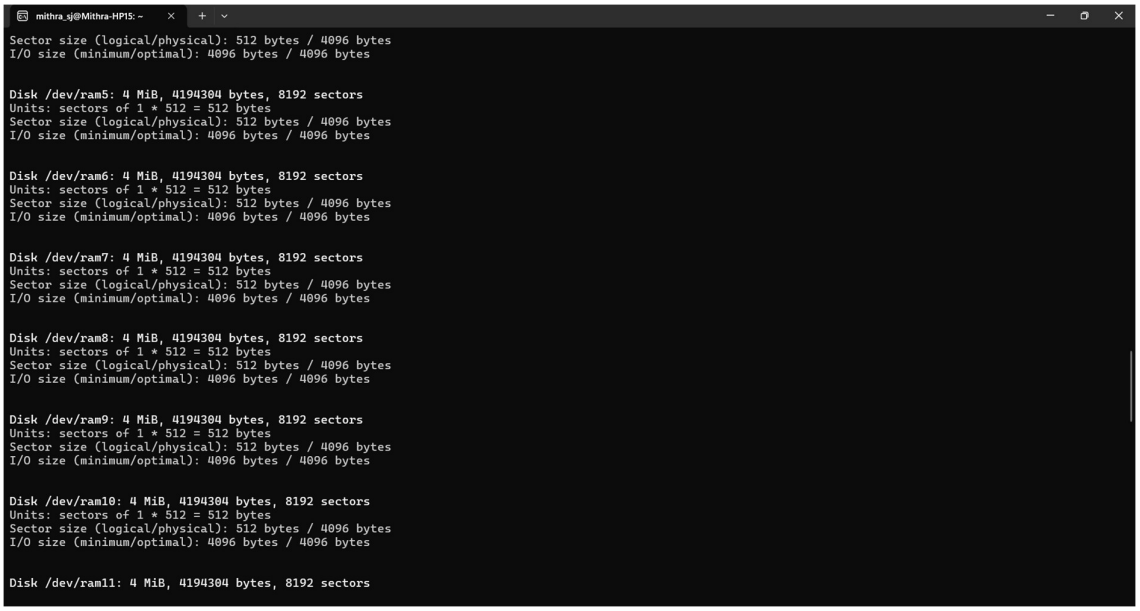
```
mithra_sj@Mithra-HP15: ~
mithra_sj@Mithra-HP15:~$ lsblk
NAME MAJ:MIN RM   SIZE RO TYPE MOUNTPOINTS
sda    8:0    0 356.9M  1 disk
sdb    8:16   0 159.4M  1 disk
sdc    8:32   0     3G  0 disk [SWAP]
sdd    8:48   0     1T  0 disk /mnt/wslg/distro
                             /
mithra_sj@Mithra-HP15:~$ sudo blkid
[sudo: authenticate] Password:
/dev/sdd: UUID="66df4eaa-c14c-417e-8dea-6382f04addeb" BLOCK_SIZE="4096" TYPE="ext4"
/dev/sdb: BLOCK_SIZE="4096" TYPE="ext4"
/dev/sdc: UUID="10210d1f-ba7f-49ea-b41e-e47e9b6750b5" TYPE="swap"
/dev/sda: BLOCK_SIZE="4096" TYPE="ext4"
mithra_sj@Mithra-HP15:~$ findmnt
TARGET                          SOURCE  FSTYPE      OPTIONS
/                               /dev/sdd
│                                       ext4        rw,relatime,discard,errors=remount-ro,data=ordered
├─/usr/lib/modules/6.18.33.2-microsoft-standard-WSL2
│                               none    overlay     rw,nosuid,nodev,noatime,lowerdir=/modules,upperdir=/lib/modules/6.18.33.
├─/mnt/wsl                      none    tmpfs       rw,relatime
├─/usr/lib/wsl/drivers          drivers 9p          ro,nosuid,nodev,noatime,aname=drivers;fmask=222;dmask=222,cache=0x5,acce
├─/mnt/wslg                     none    tmpfs       rw,relatime
│ ├─/mnt/wslg/distro            /dev/sdd
│ │                                     ext4        ro,relatime,discard,errors=remount-ro,data=ordered
│ ├─/mnt/wslg/versions.txt      none[/etc/versions.txt]
│ │                                     overlay     rw,relatime,lowerdir=/systemvhd,upperdir=/system/rw/upper,workdir=/syste
│ ├─/mnt/wslg/doc               none[/usr/share/doc]
│ │                                     overlay     rw,relatime,lowerdir=/systemvhd,upperdir=/system/rw/upper,workdir=/syste
│ └─/mnt/wslg/run/user/1000     tmpfs   tmpfs       rw,nosuid,nodev,relatime,size=1206540k,nr_inodes=301635,mode=700,uid=100
├─/usr/lib/wsl/lib              none    overlay     rw,nosuid,nodev,noatime,lowerdir=/gpu_lib_packaged:/gpu_lib_inbox,upperd
├─/init                         rootfs[/init]
│                                       rootfs      ro,size=6026944k,nr_inodes=1506736
├─/dev                          none    devtmpfs    rw,nosuid,relatime,size=6026944k,nr_inodes=1506736,mode=755
│ ├─/dev/pts                    devpts  devpts      rw,nosuid,noexec,noatime,gid=5,mode=620,ptmxmode=000
│ ├─/dev/shm                    none    tmpfs       rw,nosuid,nodev,noatime
│ ├─/dev/mqueue                 mqueue  mqueue      rw,nosuid,nodev,noexec,relatime
│ └─/dev/hugepages              hugetlbfs
│                                       hugetlbfs   rw,nosuid,nodev,relatime,pagesize=2M
├─/sys                          sysfs   sysfs       rw,nosuid,nodev,noexec,noatime
│ ├─/sys/fs/cgroup              cgroup2 cgroup2     rw,nosuid,nodev,noexec,relatime,nsdelegate
│ ├─/sys/kernel/tracing         tracefs tracefs     rw,nosuid,nodev,noexec,relatime
```

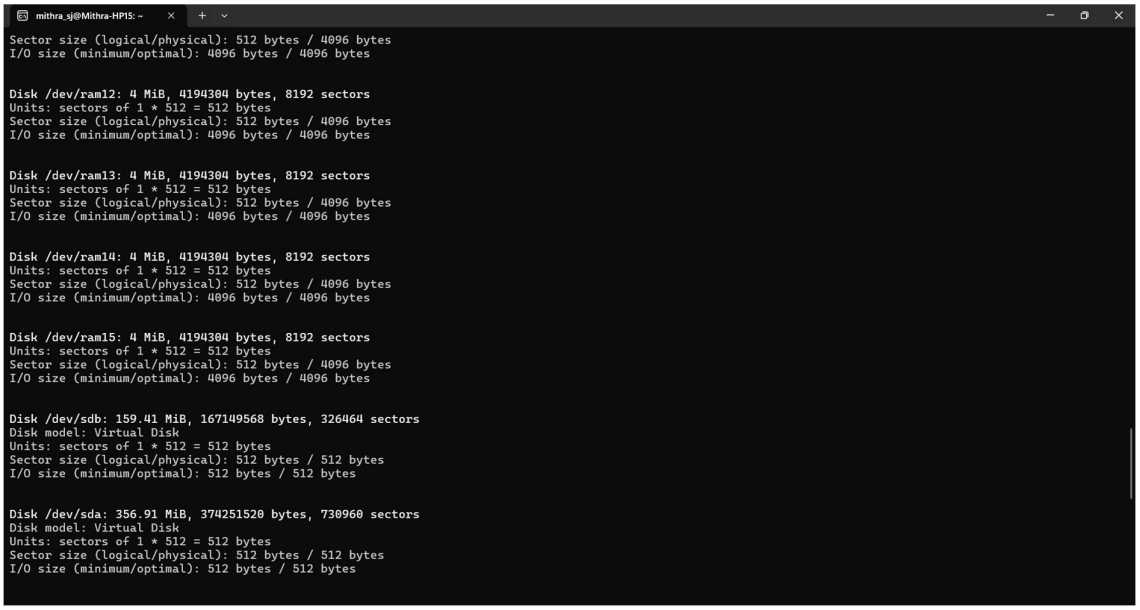


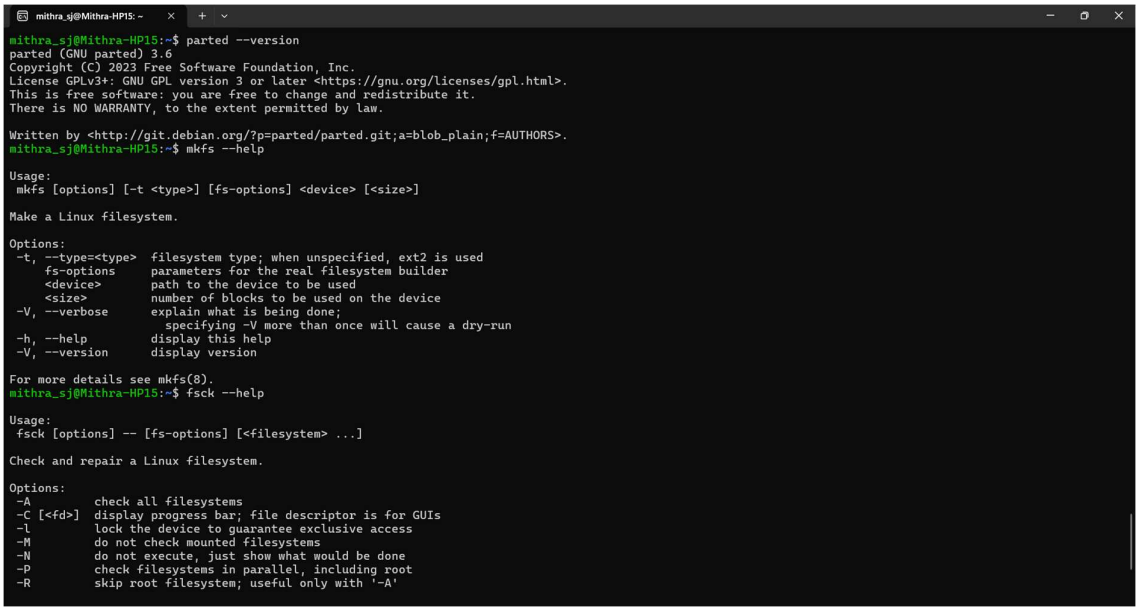
```
mithra_sj@Mithra-HP15: ~
│ ├─/sys/kernel/config          configfs
│                               configfs    rw,nosuid,nodev,noexec,relatime
│ ├─/sys/kernel/debug           debugfs debugfs     rw,nosuid,nodev,noexec,relatime
│ └─/sys/fs/fuse/connections
│                               fusectl fusectl     rw,nosuid,nodev,noexec,relatime
├─/proc                         proc    proc        rw,nosuid,nodev,noexec,noatime
│ └─/proc/sys/fs/binfmt_misc
│                               binfmt_misc
│                                       binfmt_misc rw,relatime
├─/run                          none    tmpfs       rw,nosuid,nodev,mode=755
│ ├─/run/lock                   none    tmpfs       rw,nosuid,nodev,noexec,noatime
│ ├─/run/shm                    none    tmpfs       rw,nosuid,nodev,noatime
│ ├─/run/user                   none    tmpfs       rw,nosuid,nodev,noexec,noatime,mode=755
│ │ └─/run/user                 none[/run/user]
│ │                                     tmpfs       rw,relatime
│ │ └─/run/user/1000            tmpfs   tmpfs       rw,nosuid,nodev,relatime,size=1206540k,nr_inodes=301635,mode=700,uid=100
│ ├─/run/credentials/systemd-journald.service
│ │                               none    tmpfs       ro,nosuid,nodev,noexec,relatime,nosymfollow,size=1024k,nr_inodes=1024,mo
│ ├─/run/credentials/systemd-resolved.service
│ │                               none    tmpfs       ro,nosuid,nodev,noexec,relatime,nosymfollow,size=1024k,nr_inodes=1024,mo
│ └─/run/credentials/getty@tty1.service
│                                 none    tmpfs       ro,nosuid,nodev,noexec,relatime,nosymfollow,size=1024k,nr_inodes=1024,mo
├─/tmp/.X11-unix                 none[/.X11-unix]
│                                       tmpfs       ro,relatime
├─/mnt/c                         C:\     9p          rw,noatime,aname=drvfs;path=C:\;uid=1000;gid=1000;symlinkroot=/mnt/,cach
└─/tmp                           tmpfs   tmpfs       rw,nosuid,nodev,nr_inodes=1048576
  └─/tmp/.X11-unix               none[/.X11-unix]
                                        tmpfs       ro,relatime
mithra_sj@Mithra-HP15:~$ mount
none on /usr/lib/modules/6.18.33.2-microsoft-standard-WSL2 type overlay (rw,nosuid,nodev,noatime,lowerdir=/modules,upperdir=/lib/modules/6.18.33.2-microsoft
-standard-WSL2/rw/upper,workdir=/lib/modules/6.18.33.2-microsoft-standard-WSL2/rw/work,uuid=on)
none on /mnt/wsl type tmpfs (rw,relatime)
drivers on /usr/lib/wsl/drivers type 9p (ro,nosuid,nodev,noatime,aname=drivers;fmask=222;dmask=222,cache=0x5,access=client,msize=65536,trans=fd,rfd=8,wfd=8)
/dev/sdd on / type ext4 (rw,relatime,discard,errors=remount-ro,data=ordered)
none on /mnt/wslg type tmpfs (rw,relatime)
/dev/sdd on /mnt/wslg/distro type ext4 (ro,relatime,discard,errors=remount-ro,data=ordered)
none on /usr/lib/wsl/lib type overlay (rw,nosuid,nodev,noatime,lowerdir=/gpu_lib_packaged:/gpu_lib_inbox,upperdir=/gpu_lib/rw/upper,workdir=/gpu_lib/rw/work
,uuid=on)
rootfs on /init type rootfs (ro,size=6026944k,nr_inodes=1506736)
none on /dev type devtmpfs (rw,nosuid,relatime,size=6026944k,nr_inodes=1506736,mode=755)
sysfs on /sys type sysfs (rw,nosuid,nodev,noexec,noatime)
```

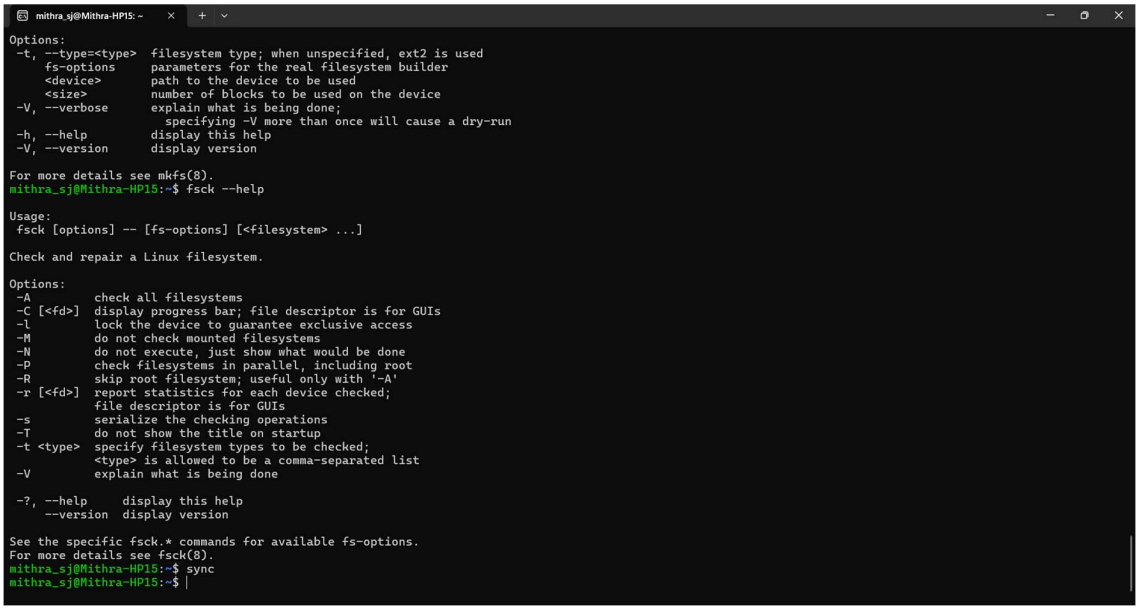

mithra_sj@Mithra-HP15: ~
none on /run/user type tmpfs (rw,nosuid,nodev,noexec,noatime,mode=755)
binfmt_misc on /proc/sys/fs/binfmt_misc type binfmt_misc (rw,relatime)
cgroup2 on /sys/fs/cgroup type cgroup2 (rw,nosuid,nodev,noexec,relatime,nsdelegate)
none on /mnt/wslg/versions.txt type overlay (rw,relatime,lowerdir=/systemvhd,upperdir=/system/rw/upper,workdir=/system/rw/work,uuid=on)
none on /mnt/wslg/doc type overlay (rw,relatime,lowerdir=/systemvhd,upperdir=/system/rw/upper,workdir=/system/rw/work,uuid=on)
none on /tmp/.X11-unix type tmpfs (ro,relatime)
C:\ on /mnt/c type 9p (rw,noatime,aname=drvfs;path=C:\;uid=1000;gid=1000;symlinkroot=/mnt/,cache=0x5,access=client,msize=65536,trans=fd,rfd=6,wfd=6)
none on /run/user type tmpfs (rw,relatime)
none on /run/credentials/systemd-journald.service type tmpfs (ro,nosuid,nodev,noexec,relatime,nosymfollow,size=1024k,nr_inodes=1024,mode=700,noswap)
tracefs on /sys/kernel/tracing type tracefs (rw,nosuid,nodev,noexec,relatime)
mqueue on /dev/mqueue type mqueue (rw,nosuid,nodev,noexec,relatime)
configfs on /sys/kernel/config type configfs (rw,nosuid,nodev,noexec,relatime)
hugetlbfs on /dev/hugepages type hugetlbfs (rw,nosuid,nodev,relatime,pagesize=2M)
tmpfs on /tmp type tmpfs (rw,nosuid,nodev,nr_inodes=1048576)
debugfs on /sys/kernel/debug type debugfs (rw,nosuid,nodev,noexec,relatime)
fusectl on /sys/fs/fuse/connections type fusectl (rw,nosuid,nodev,noexec,relatime)
none on /run/credentials/systemd-resolved.service type tmpfs (ro,nosuid,nodev,noexec,relatime,nosymfollow,size=1024k,nr_inodes=1024,mode=700,noswap)
none on /tmp/.X11-unix type tmpfs (ro,relatime)
none on /run/credentials/getty@tty1.service type tmpfs (ro,nosuid,nodev,noexec,relatime,nosymfollow,size=1024k,nr_inodes=1024,mode=700,noswap)
tmpfs on /run/user/1000 type tmpfs (rw,nosuid,nodev,relatime,size=1206540k,nr_inodes=301635,mode=700,uid=1000,gid=1000)
tmpfs on /mnt/wslg/run/user/1000 type tmpfs (rw,nosuid,nodev,relatime,size=1206540k,nr_inodes=301635,mode=700,uid=1000,gid=1000)
mithra_sj@Mithra-HP15:~$ umount --help
Usage:
umount [-hV]
umount -a [options]
umount [options] <source> | <directory>
Unmount filesystems.
Options:
-a, --all unmount all filesystems
-A, --all-targets unmount all mountpoints for the given device in the
current namespace
-c, --no-canonicalize don't canonicalize paths
-d, --detach-loop if mounted loop device, also free this loop device
--fake dry run; skip the umount(2) syscall
-f, --force force unmount (in case of an unreachable NFS system)
-i, --internal-only don't call the umount.<type> helpers
-n, --no-mtab don't write to /etc/mtab
-l, --lazy detach the filesystem now, clean up things later


mithra_sj@Mithra-HP15: ~
-l, --lazy detach the filesystem now, clean up things later
-O, --test-opts <list> limit the set of filesystems (use with -a)
-R, --recursive recursively unmount a target with all its children
-r, --read-only in case unmounting fails, try to remount read-only
-t, --types <list> limit the set of filesystem types
-v, --verbose say what is being done
-q, --quiet suppress 'not mounted' error messages
-N, --namespace <ns> perform umount in another namespace
-h, --help display this help
-V, --version display version
For more details see umount(8).
mithra_sj@Mithra-HP15:~$ sudo fdisk -l
Disk /dev/ram0: 4 MiB, 4194304 bytes, 8192 sectors
Units: sectors of 1 * 512 = 512 bytes
Sector size (logical/physical): 512 bytes / 4096 bytes
I/O size (minimum/optimal): 4096 bytes / 4096 bytes
Disk /dev/ram1: 4 MiB, 4194304 bytes, 8192 sectors
Units: sectors of 1 * 512 = 512 bytes
Sector size (logical/physical): 512 bytes / 4096 bytes
I/O size (minimum/optimal): 4096 bytes / 4096 bytes
Disk /dev/ram2: 4 MiB, 4194304 bytes, 8192 sectors
Units: sectors of 1 * 512 = 512 bytes
Sector size (logical/physical): 512 bytes / 4096 bytes
I/O size (minimum/optimal): 4096 bytes / 4096 bytes
Disk /dev/ram3: 4 MiB, 4194304 bytes, 8192 sectors
Units: sectors of 1 * 512 = 512 bytes
Sector size (logical/physical): 512 bytes / 4096 bytes
I/O size (minimum/optimal): 4096 bytes / 4096 bytes
Disk /dev/ram4: 4 MiB, 4194304 bytes, 8192 sectors
Units: sectors of 1 * 512 = 512 bytes
Sector size (logical/physical): 512 bytes / 4096 bytes


mithra_sj@Mithra-HP15: ~
Sector size (logical/physical): 512 bytes / 4096 bytes
I/O size (minimum/optimal): 4096 bytes / 4096 bytes
Disk /dev/ram5: 4 MiB, 4194304 bytes, 8192 sectors
Units: sectors of 1 * 512 = 512 bytes
Sector size (logical/physical): 512 bytes / 4096 bytes
I/O size (minimum/optimal): 4096 bytes / 4096 bytes
Disk /dev/ram6: 4 MiB, 4194304 bytes, 8192 sectors
Units: sectors of 1 * 512 = 512 bytes
Sector size (logical/physical): 512 bytes / 4096 bytes
I/O size (minimum/optimal): 4096 bytes / 4096 bytes
Disk /dev/ram7: 4 MiB, 4194304 bytes, 8192 sectors
Units: sectors of 1 * 512 = 512 bytes
Sector size (logical/physical): 512 bytes / 4096 bytes
I/O size (minimum/optimal): 4096 bytes / 4096 bytes
Disk /dev/ram8: 4 MiB, 4194304 bytes, 8192 sectors
Units: sectors of 1 * 512 = 512 bytes
Sector size (logical/physical): 512 bytes / 4096 bytes
I/O size (minimum/optimal): 4096 bytes / 4096 bytes
Disk /dev/ram9: 4 MiB, 4194304 bytes, 8192 sectors
Units: sectors of 1 * 512 = 512 bytes
Sector size (logical/physical): 512 bytes / 4096 bytes
I/O size (minimum/optimal): 4096 bytes / 4096 bytes
Disk /dev/ram10: 4 MiB, 4194304 bytes, 8192 sectors
Units: sectors of 1 * 512 = 512 bytes
Sector size (logical/physical): 512 bytes / 4096 bytes
I/O size (minimum/optimal): 4096 bytes / 4096 bytes
Disk /dev/ram11: 4 MiB, 4194304 bytes, 8192 sectors


mithra_sj@Mithra-HP15: ~
Sector size (logical/physical): 512 bytes / 4096 bytes
I/O size (minimum/optimal): 4096 bytes / 4096 bytes
Disk /dev/ram12: 4 MiB, 4194304 bytes, 8192 sectors
Units: sectors of 1 * 512 = 512 bytes
Sector size (logical/physical): 512 bytes / 4096 bytes
I/O size (minimum/optimal): 4096 bytes / 4096 bytes
Disk /dev/ram13: 4 MiB, 4194304 bytes, 8192 sectors
Units: sectors of 1 * 512 = 512 bytes
Sector size (logical/physical): 512 bytes / 4096 bytes
I/O size (minimum/optimal): 4096 bytes / 4096 bytes
Disk /dev/ram14: 4 MiB, 4194304 bytes, 8192 sectors
Units: sectors of 1 * 512 = 512 bytes
Sector size (logical/physical): 512 bytes / 4096 bytes
I/O size (minimum/optimal): 4096 bytes / 4096 bytes
Disk /dev/ram15: 4 MiB, 4194304 bytes, 8192 sectors
Units: sectors of 1 * 512 = 512 bytes
Sector size (logical/physical): 512 bytes / 4096 bytes
I/O size (minimum/optimal): 4096 bytes / 4096 bytes
Disk /dev/sdb: 159.41 MiB, 167149568 bytes, 326464 sectors
Disk model: Virtual Disk
Units: sectors of 1 * 512 = 512 bytes
Sector size (logical/physical): 512 bytes / 512 bytes
I/O size (minimum/optimal): 512 bytes / 512 bytes
Disk /dev/sda: 356.91 MiB, 374251520 bytes, 730960 sectors
Disk model: Virtual Disk
Units: sectors of 1 * 512 = 512 bytes
Sector size (logical/physical): 512 bytes / 512 bytes
I/O size (minimum/optimal): 512 bytes / 512 bytes


mithra_sj@Mithra-HP15: ~
mithra_sj@Mithra-HP15:~$ parted --version
parted (GNU parted) 3.6
Copyright (C) 2023 Free Software Foundation, Inc.
License GPLv3+: GNU GPL version 3 or later <https://gnu.org/licenses/gpl.html>.
This is free software: you are free to change and redistribute it.
There is NO WARRANTY, to the extent permitted by law.
Written by <http://git.debian.org/?p=parted/parted.git;a=blob_plain;f=AUTHORS>.
mithra_sj@Mithra-HP15:~$ mkfs --help
Usage:
mkfs [options] [-t <type>] [fs-options] <device> [<size>]
Make a Linux filesystem.
Options:
-t, --type=<type> filesystem type; when unspecified, ext2 is used
fs-options parameters for the real filesystem builder
<device> path to the device to be used
<size> number of blocks to be used on the device
-V, --verbose explain what is being done;
specifying -V more than once will cause a dry-run
-h, --help display this help
-V, --version display version
For more details see mkfs(8).
mithra_sj@Mithra-HP15:~$ fsck --help
Usage:
fsck [options] -- [fs-options] [<filesystem> ...]
Check and repair a Linux filesystem.
Options:
-A check all filesystems
-C [<fd>] display progress bar; file descriptor is for GUIs
-l lock the device to guarantee exclusive access
-M do not check mounted filesystems
-N do not execute, just show what would be done
-P check filesystems in parallel, including root
-R skip root filesystem; useful only with '-A'


mithra_sj@Mithra-HP15: ~
Options:
-t, --type=<type> filesystem type; when unspecified, ext2 is used
fs-options parameters for the real filesystem builder
<device> path to the device to be used
<size> number of blocks to be used on the device
-V, --verbose explain what is being done;
specifying -V more than once will cause a dry-run
-h, --help display this help
-V, --version display version
For more details see mkfs(8).
mithra_sj@Mithra-HP15:~$ fsck --help
Usage:
fsck [options] -- [fs-options] [<filesystem> ...]
Check and repair a Linux filesystem.
Options:
-A check all filesystems
-C [<fd>] display progress bar; file descriptor is for GUIs
-l lock the device to guarantee exclusive access
-M do not check mounted filesystems
-N do not execute, just show what would be done
-P check filesystems in parallel, including root
-R skip root filesystem; useful only with '-A'
-r [<fd>] report statistics for each device checked;
file descriptor is for GUIs
-s serialize the checking operations
-T do not show the title on startup
-t <type> specify filesystem types to be checked;
<type> is allowed to be a comma-separated list
-V explain what is being done
-?, --help display this help
--version display version
See the specific fsck.* commands for available fs-options.
For more details see fsck(8).
mithra_sj@Mithra-HP15:~$ sync
mithra_sj@Mithra-HP15:~$