

Six popular process scheduling algorithms

- First-Come, First-Served (FCFS) Scheduling
- Shortest-Job-Next (SJN) Scheduling
- Priority Scheduling
- Shortest Remaining Time
- Round Robin(RR) Scheduling
- Multiple-Level Queues Scheduling

Six popular process scheduling algorithms

- These algorithms are either **non-preemptive or preemptive**.
- Non-preemptive algorithms are designed so that once a process enters the running state, it cannot be preempted until it completes its allotted time,
- whereas the preemptive scheduling is based on priority where a scheduler may preempt a low priority running process anytime when a high priority process enters into a ready state.

First Come First Serve (FCFS)

- Jobs are executed on first come, first serve basis.
- It is a non-preemptive, pre-emptive scheduling algorithm.
- Easy to understand and implement.
- Its implementation is based on FIFO queue.
- Poor in performance as average wait time is high.

First Come First Serve (FCFS)

Process	Arrival Time	Execute Time	Service Time
P0	0	5	0
P1	1	3	5
P2	2	8	8
P3	3	6	16



First Come First Serve (FCFS)

Process	Wait Time : Service Time - Arrival Time
P0	$0 - 0 = 0$
P1	$5 - 1 = 4$
P2	$8 - 2 = 6$
P3	$16 - 3 = 13$

Average Wait Time: $(0+4+6+13) / 4 = 5.75$

Shortest Job Next (SJN)

- This is also known as **shortest job first**, or SJF
- This is a non-preemptive, pre-emptive scheduling algorithm.
- Best approach to minimize waiting time.
- Easy to implement in Batch systems where required CPU time is known in advance.
- Impossible to implement in interactive systems where required CPU time is not known.
- The processor should know in advance how much time process will take.

Shortest Job Next (SJN)

- Given: Table of processes, and their Arrival time, Execution time

Process	Arrival Time	Execution Time	Service Time
P0	0	5	0
P1	1	3	5
P2	2	8	14
P3	3	6	8

Shortest Job Next (SJN)

Process	Arrival Time	Execute Time	Service Time
P0	0	5	3
P1	1	3	0
P2	2	8	16
P3	3	6	8



Shortest Job Next (SJN)

- **Waiting time** of each process is as follows –

Process		Waiting Time
P0	$0 - 0 = 0$	
P1	$5 - 1 = 4$	
P2	$14 - 2 = 12$	
P3	$8 - 3 = 5$	

Average Wait Time: $(0 + 4 + 12 + 5)/4 = 21 / 4 = 5.25$

Priority Based Scheduling

- Priority scheduling is a non-preemptive algorithm and one of the most common scheduling algorithms in batch systems.
- Each process is assigned a priority. Process with highest priority is to be executed first and so on.
- Processes with same priority are executed on first come first served basis.
- Priority can be decided based on memory requirements, time requirements or any other resource requirement.

Priority Based Scheduling

- Given: Table of processes, and their Arrival time, Execution time, and priority. Here we are considering 1 is the lowest priority.

Process	Arrival Time	Execution Time	Priority	Service Time
P0	0	5	1	0
P1	1	3	2	11
P2	2	8	1	14
P3	3	6	3	5

Priority Based Scheduling

Process	Arrival Time	Execute Time	Priority	Service Time
P0	0	5	1	9
P1	1	3	2	6
P2	2	8	1	14
P3	3	6	3	0



Priority Based Scheduling

- **Waiting time** of each process is as follows –

Process		Waiting Time
P0	$0 - 0 = 0$	
P1	$11 - 1 = 10$	
P2	$14 - 2 = 12$	
P3	$5 - 3 = 2$	

Average Wait Time: $(0 + 10 + 12 + 2)/4 = 24 / 4 = 6$

Shortest Remaining Time


- Shortest remaining time (SRT) is the preemptive version of the SJN algorithm.
- The processor is allocated to the job closest to completion but it can be preempted by a newer ready job with shorter time to completion.
- Impossible to implement in interactive systems where required CPU time is not known.
- It is often used in batch environments where short jobs need to give preference.

Round Robin Scheduling

- Round Robin is the preemptive process scheduling algorithm.
- Each process is provided a fix time to execute, it is called a **quantum**.
- Once a process is executed for a given time period, it is preempted and other process executes for a given time period.
- Context switching is used to save states of preempted processes.

Round Robin Scheduling

Quantum = 3

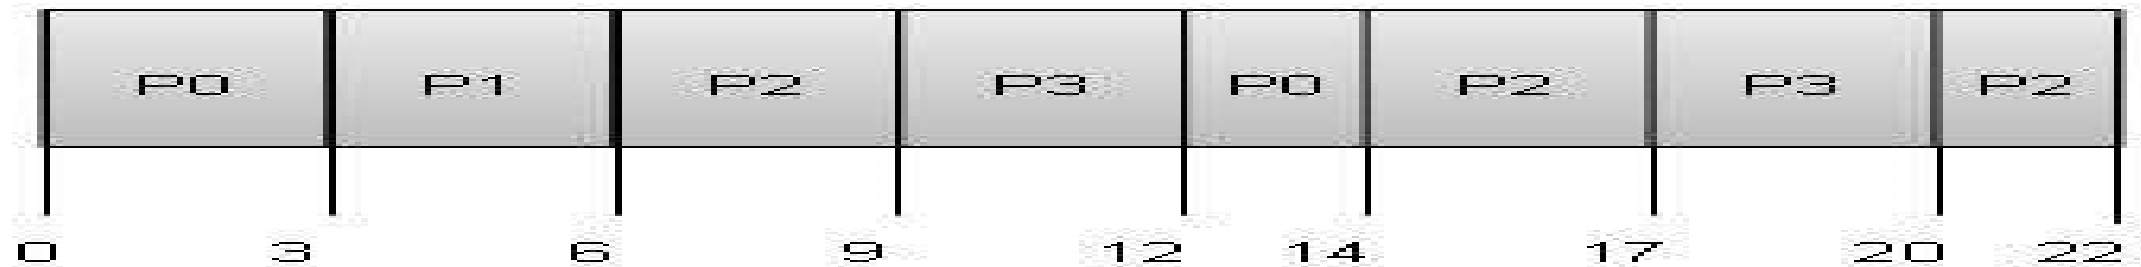

Round Robin Scheduling

- **Wait time** of each process is as follows –

Process	Wait Time : Service Time - Arrival Time
P0	$(0 - 0) + (12 - 3) = 9$
P1	$(3 - 1) = 2$
P2	$(6 - 2) + (14 - 9) + (20 - 17) = 12$
P3	$(9 - 3) + (17 - 12) = 11$

Average Wait Time: $(9+2+12+11) / 4 = 8.5$

Multiple-Level Queues Scheduling

Multiple-level queues are not an independent scheduling algorithm. They make use of other existing algorithms to group and schedule jobs with common characteristics.

- Multiple queues are maintained for processes with common characteristics.
- Each queue can have its own scheduling algorithms.
- Priorities are assigned to each queue.

Multiple-Level Queues Scheduling

- For example, CPU-bound jobs can be scheduled in one queue and all I/O-bound jobs in another queue. The Process Scheduler then alternately selects jobs from each queue and assigns them to the CPU based on the algorithm assigned to the queue.