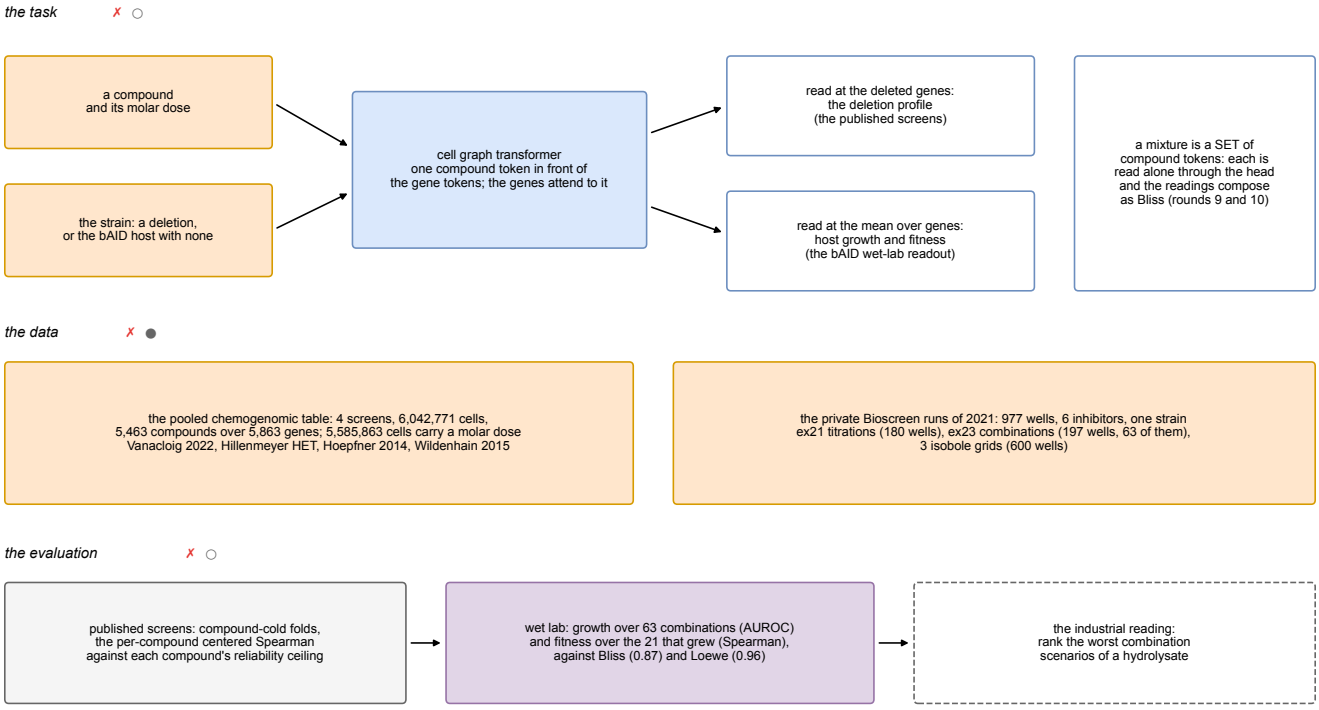


Figure 1: The task, the data and the evaluation. Three blocks, each a layout rather than a drawn result; a dashed box is proposed and not run. **The task ✗○**: a compound and its molar dose enter the cell graph transformer as one token placed in front of the gene tokens, which attend to it; a published-screen strain is read at its deleted genes, giving a deletion profile, and the bAID host, which carries no deletion, is read at the mean over genes, giving growth and fitness. A mixture is a set of compound tokens, one per inhibitor: each is read alone through the shared head and the readings compose as Bliss independence (rounds nine and ten), which is what took the private readout from chance to the rule's level. **The data ✗●**: the pooled chemogenomic table over 4 screens, 6,042,771 cells and 5,463 compounds across 5,863 genes, of which 5,585,863 cells carry a molar dose, beside the private Bioscreen runs, 977 wells over 6 inhibitors on one strain. **The evaluation ✗○**: compound-cold folds and the per-compound centered Spearman on the published side, growth and fitness against Bliss and Loewe on the wet-lab side, and the industrial reading, which is to rank the worst combination scenarios of a hydrolysate.