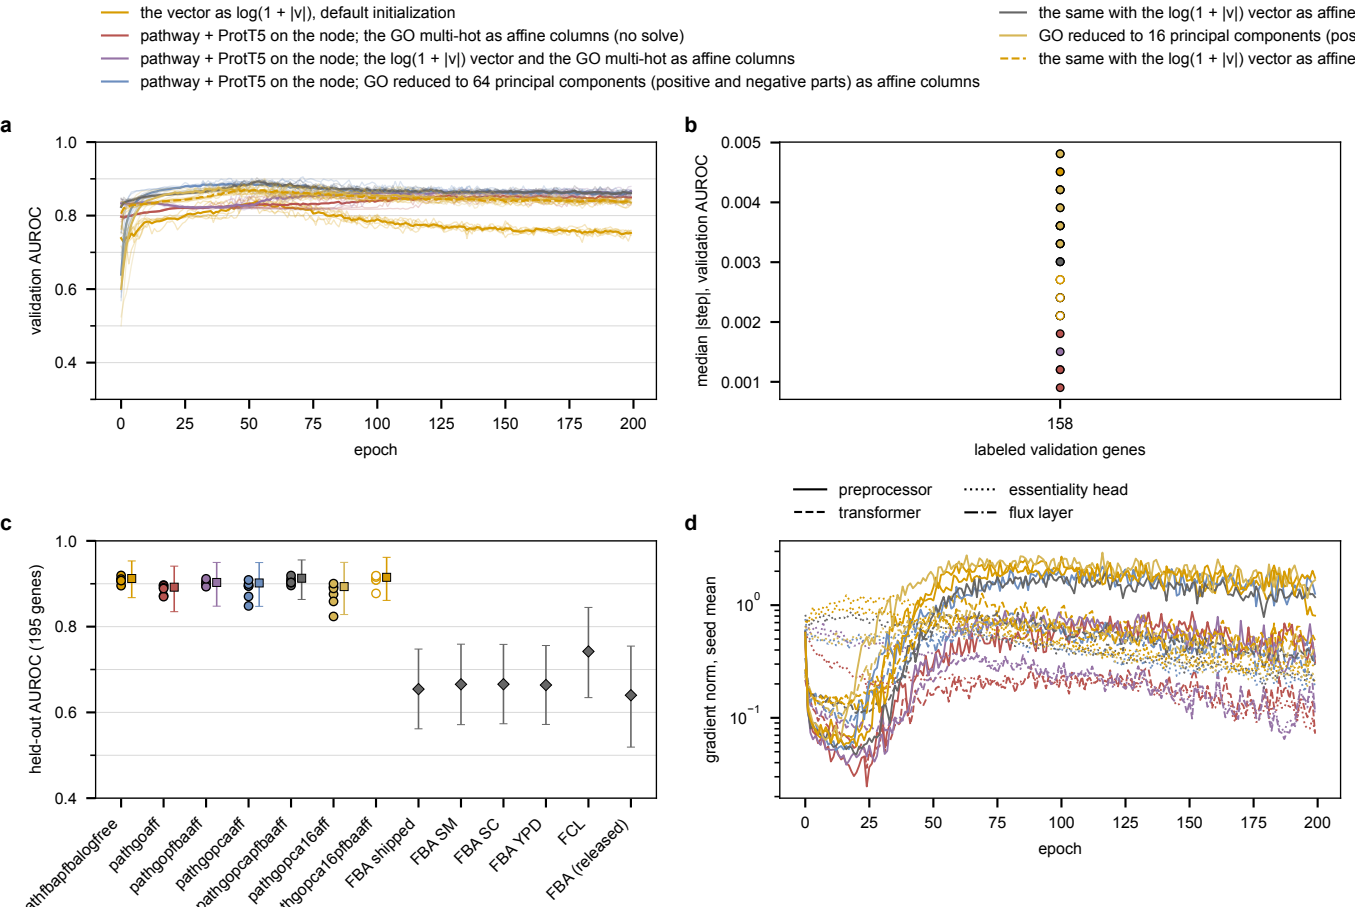

the vector as log(1 + |v|), default initialization
pathway + ProtT5 on the node; the GO multi-hot as affine columns (no solve)
pathway + ProtT5 on the node; the log(1 + |v|) vector and the GO multi-hot as affine columns
pathway + ProtT5 on the node; GO reduced to 64 principal components (positive and negative parts) as affine columns
the same with the log(1 + |v|) vector as affine
GO reduced to 16 principal components (pos
the same with the log(1 + |v|) vector as affine
a
validation AUROC
epoch
b
median |step|, validation AUROC
labeled validation genes
158
c
held-out AUROC (195 genes)
pathfbapfbalogfree
pathgoaff
pathgopfbaaff
pathgopcaaff
pathgopcapfbaaff
pathgopca16aff
pathgopca16pfbaaff
FBA shipped
FBA SM
FBA SC
FBA YPD
FCL
FBA (released)
preprocessor
transformer
essentiality head
flux layer
d
gradient norm, seed mean
epoch