


■ a measured value (the public screens, the Bioscreen wells)
 ■ model-free rule: the mean of the single-compound profiles
 ■ learned on chemistry features (ridge, kernel ridge, nearest neighbor)

■ model-free rule: Bliss independence (the product of the singles)
 ■ model-free rule: Loewe additivity (the dose-equivalent sum)
 ■ learned by the cell graph transformer

■ model-free rule: the highest single agent


a ✕ ●

the task: a compound as a token the genes read

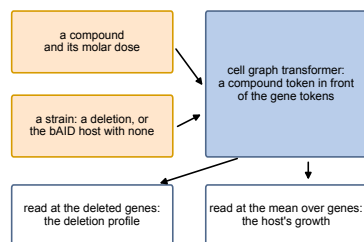


b ✕ ●

what is trained on, and what is held back

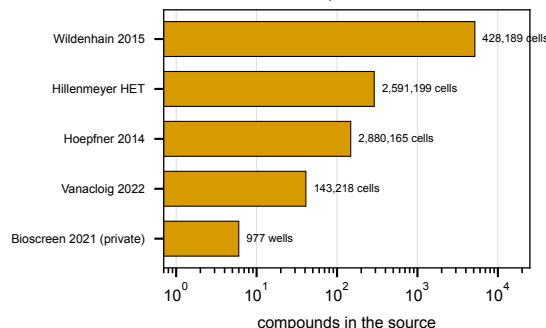


c ✕ ●

how a model is scored, and against what

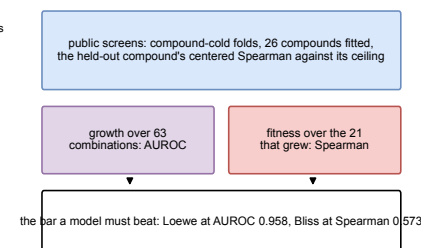


d ✕ ●

the ladder on the corrected store: the ten best arms

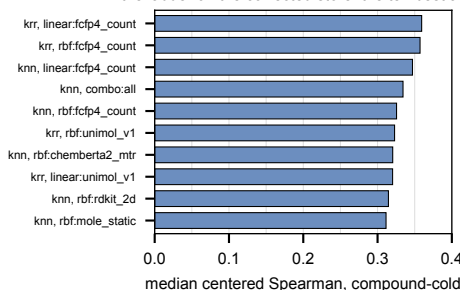


e ✕ ●

the transformer against ridge, round 2 part run

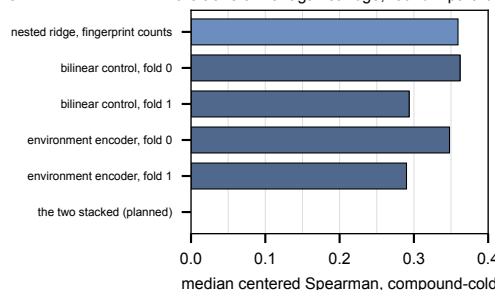


f ✕ ●

the learning curve in compounds

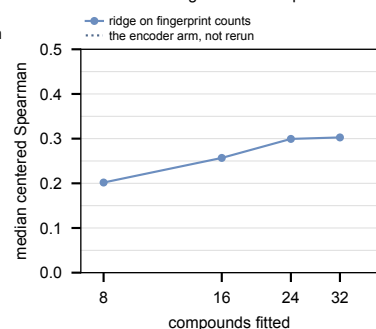


g ✕ ●

dose: the same compound in two media

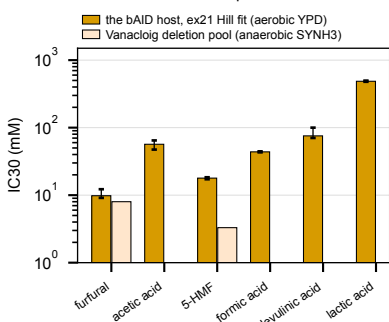


h ✕ ●

the composition rule on public pairs

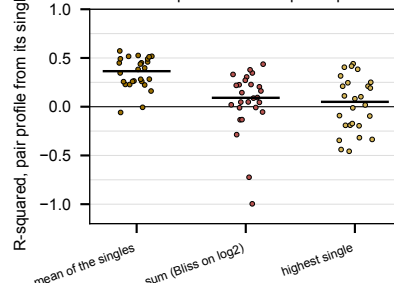


the predicted profile against the measured

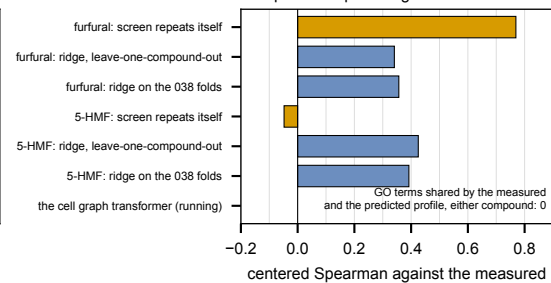


j ✕ ●

the six single-agent titrations

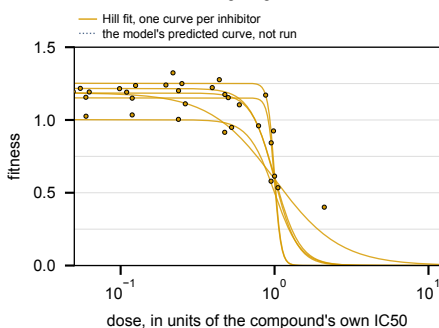


k ✕ ●

the combinations that grew, against the two rules

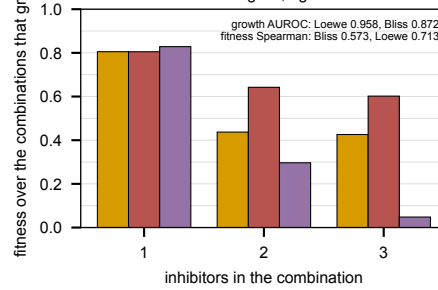

the three isobole grids

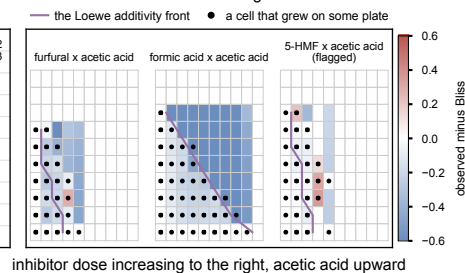

section status ✕ not done, agents may edit freely

■ author-reviewed

■ final

figure status ● on file

● partial

○ idea only