



a Adding one dataset to the served graph: Every stage is code that ran for the Nadal-Ribelles 2025 admission.

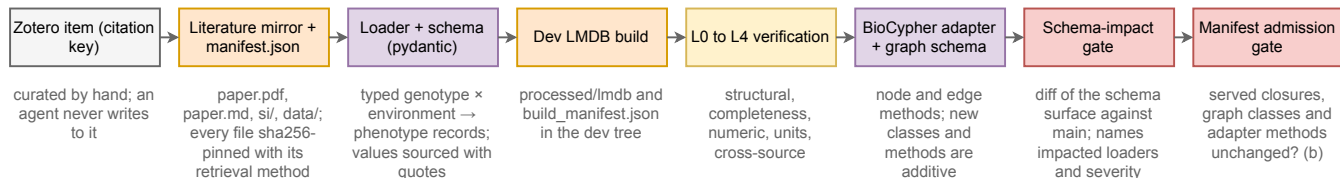


b What the gates decide. A changed class reaches every loader that imports it; only an unchanged served graph admits an increment.

schema surface (pydantic classes) above, dataset loaders below

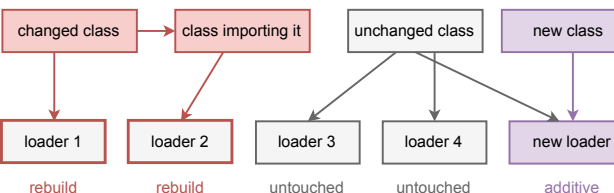

Each loader's closure is the forward closure of the classes it imports over the schema surface. A change is stale when stored records would serialize differently and breaking when construction fails; both rebuild loaders 1 and 2 and leave 3 and 4 alone. A new class or a new adapter method reaches only the new loader.

manifest admission: two paths into the served store

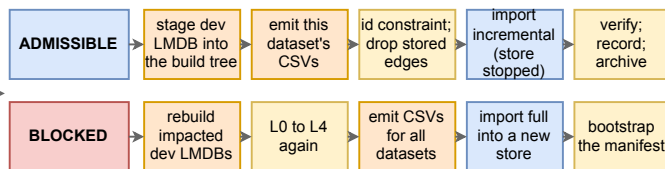

Admissible when the served datasets' closure fingerprints, the existing graph node classes and the adapter methods they use are all unchanged; new classes, node types and methods pass. Incremental import matches existing node ids and can neither update nor delete them, so any change to a served class takes the full path, and the manifest names the datasets and symbols that force it.

c Planned: agents add datasets in parallel and grow the ontology under the same gates. Dashed borders are not yet built.

