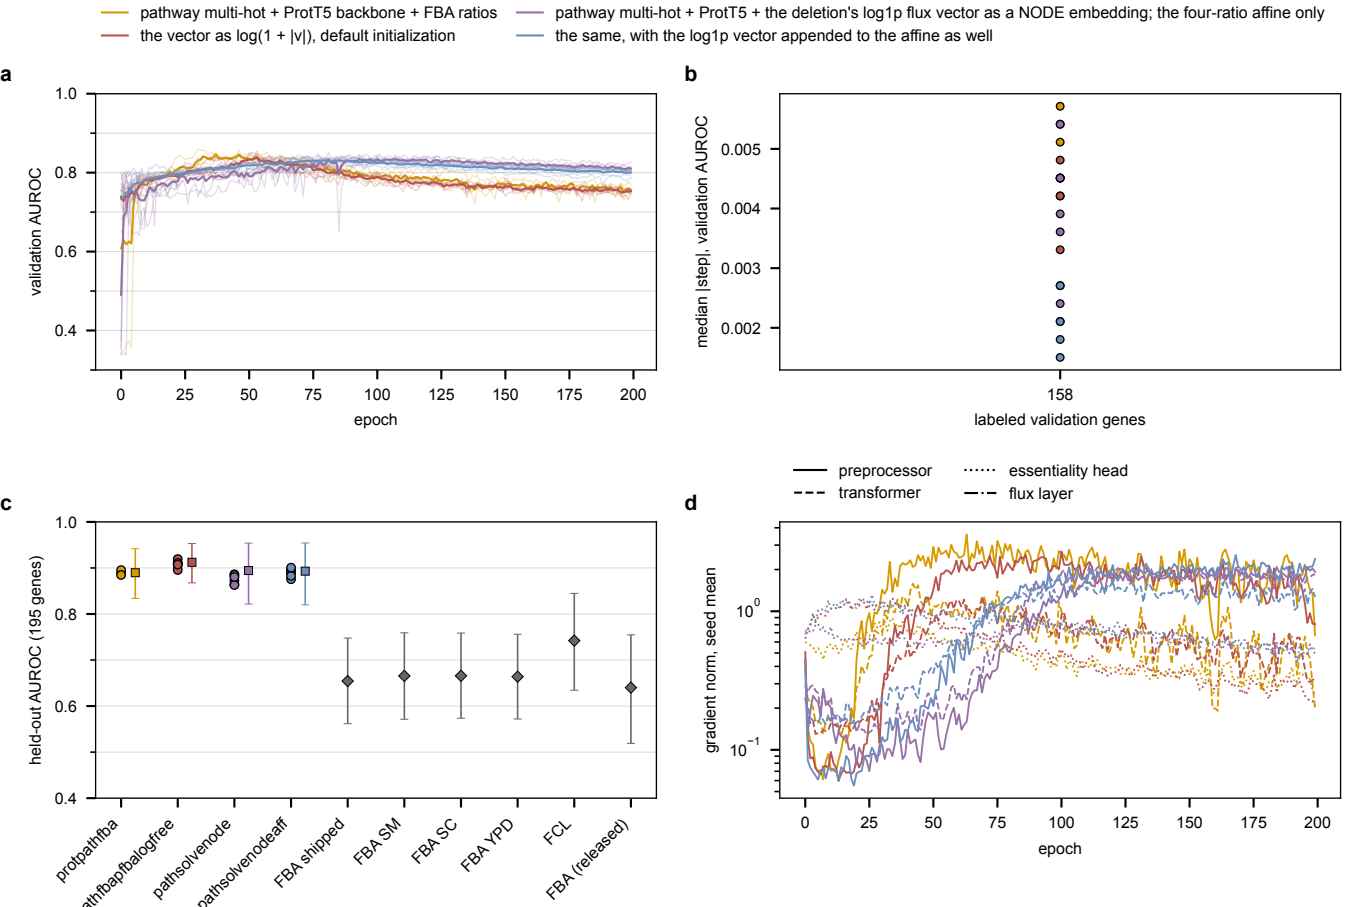

pathway multi-hot + ProtT5 backbone + FBA ratios
the vector as log(1 + |v|), default initialization
pathway multi-hot + ProtT5 + the deletion's log1p flux vector as a NODE embedding; the four-ratio affine only
the same, with the log1p vector appended to the affine as well
a
validation AUROC
epoch
b
median |step|, validation AUROC
labeled validation genes
158
c
held-out AUROC (195 genes)
protpathfba
pathfbapfbalogfree
pathsolvenode
pathsolvenodeaff
FBA shipped
FBA SM
FBA SC
FBA YPD
FCL
FBA (released)
preprocessor
transformer
essentiality head
flux layer
d
gradient norm, seed mean
epoch