

docker创建mysql 安装nextcloud

原创 IT大师兄吖 于 2021-03-28 20:52:02 发布 阅读量837 收藏 5 点赞数

分类专栏: 实用派 文章标签: 数据库 docker mysql linux nextcloud



实用派 专栏收录该内容

2 订阅 48 篇文章

原文链接: <https://dsx2016.com/?p=1711>

公众号: 大师兄2016

docker 拉取mysql

```
docker pull mysql:latest
```

```
root@dsx2016:/home/workSpace/nextcloud# docker pull mysql:latest
latest: Pulling from library/mysql
6f28985ad184: Already exists
e7cd18945cf6: Pull complete
ee91068b9313: Pull complete
b4efala4f93b: Pull complete
f220edfa5893: Pull complete
74a27d3460f8: Pull complete
2e11e23b7542: Pull complete
fbce32c99761: Pull complete
08545fb3966f: Pull complete
5b9c076841dc: Pull complete
ef8b369352ae: Pull complete
ebd210f0917d: Pull complete
Digest: sha256:5d1d733f32c28d47061e9d5c2b1fb49b4628c4432901632a70019ec950eda491
Status: Downloaded newer image for mysql:latest
docker.io/library/mysql:latest
root@dsx2016:/home/workSpace/nextcloud#
```

运行mysql容器

```
docker run -itd --name mysql -p 3307:3306 -e MYSQL_ROOT_PASSWORD=123456 mysql
```

1. -p 3307:3306 : 映射容器服务的 3306 端口到宿主机的 3307 端口, 外部主机可以直接通过 宿主机ip:3307 访问到 MySQL 的服务
2. MYSQL_ROOT_PASSWORD=123456: 设置 MySQL 服务 root 用户的密码

```
root@dsx2016:/home/workSpace/nextcloud# docker run -itd --name mysql -p 3307:3306 -e MYSQL_ROOT_PASSWORD=123456 mysql
6e86802b5f9c6ddcf40e0bcd4773e98467d129b718dcbbc005cb6cac1eb696a1
root@dsx2016:/home/workSpace/nextcloud# docker ps
CONTAINER ID   IMAGE     COMMAND                  CREATED    STATUS    PORTS                               NAMES
6e86802b5f9c   mysql    "docker-entrypoint.s..." 7 seconds ago Up 6 seconds    33060/tcp, 0.0.0.0:3307->3306/tcp    mysql
eba3597bceea   nextcloud "/entrypoint.sh apac..." 33 hours ago Up 33 hours    0.0.0.0:9001->80/tcp                nextcloud
root@dsx2016:/home/workSpace/nextcloud#
```

进入mysql容器

```
docker exec -it mysql bash
```

1. -it 提供交互式环境
2. bash 进入实例后启动bash程序

```
root@dsx2016:/home/workSpace/nextcloud# docker exec -it mysql bash
root@6e86802b5f9c:/#
```

登录数据库

```
mysql -uroot -p
```



IT大师兄吖

关注

密码是刚刚设置的123456

```
root@6e86802b5f9c:/# mysql -uroot -p
Enter password:
Welcome to the MySQL monitor.  Commands end with ; or \g.
Your MySQL connection id is 8
Server version: 8.0.23 MySQL Community Server - GPL

Copyright (c) 2000, 2021, Oracle and/or its affiliates.

Oracle is a registered trademark of Oracle Corporation and/or its
affiliates. Other names may be trademarks of their respective
owners.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

mysql>
```

创建数据库 nextcloud

```
create database nextcloud charset=utf8;
```

```
mysql> create database nextcloud charset=utf8;
Query OK, 1 row affected, 1 warning (0.00 sec)

mysql>
```

退出容器

先输入单词,回车

```
exit
```

然后按住键盘

```
control + p + q
```

```
mysql> exit
Bye
root@6e86802b5f9c:/# read escape sequence
root@dsx2016:/home/workSpace/nextcloud#
```

安装nextcloud


特别注意

1. 数据库选择mysql
2. 主机名一定要填写ip:端口(如果是localhost+端口,会报错,原因未知,给权限也没用)
3. 数据库账户一定要是root超级用户(如果是其他新建用户,也会报错,给所有权限也没有用)



IT大师兄吖

关注

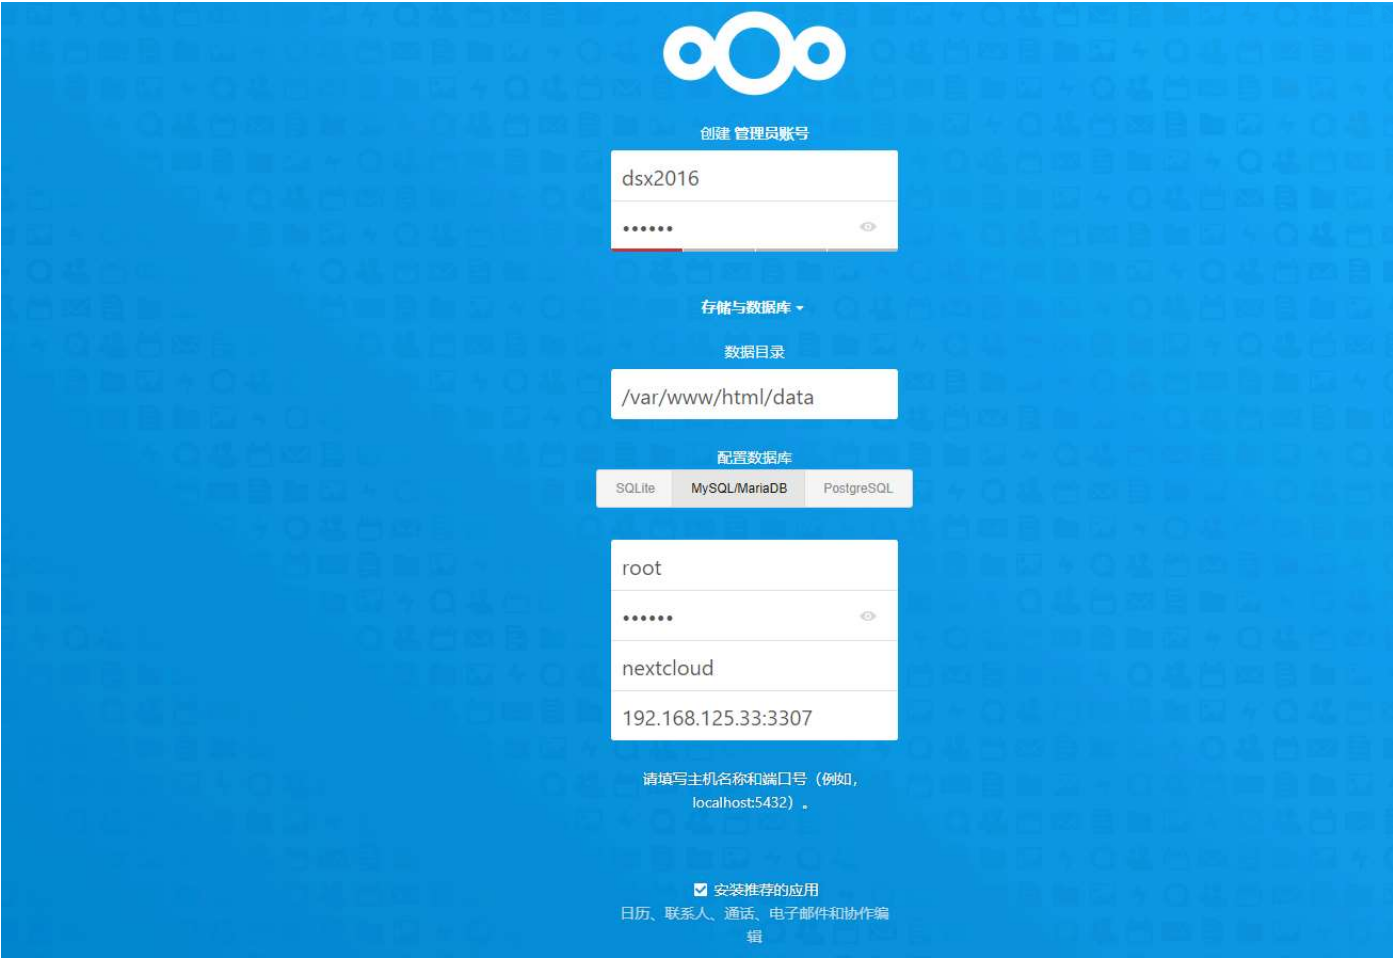

安装成功

使用mysql要好于sqlite ,sqlite只用最小实例和demo



END.

文章知识点与官方知识档案匹配，可进一步学习相关知识

 IT大师兄呀

关注