


Mmabatho Portia Shai
Student Number :2805001853

Downloaded the 5 tables on workspace

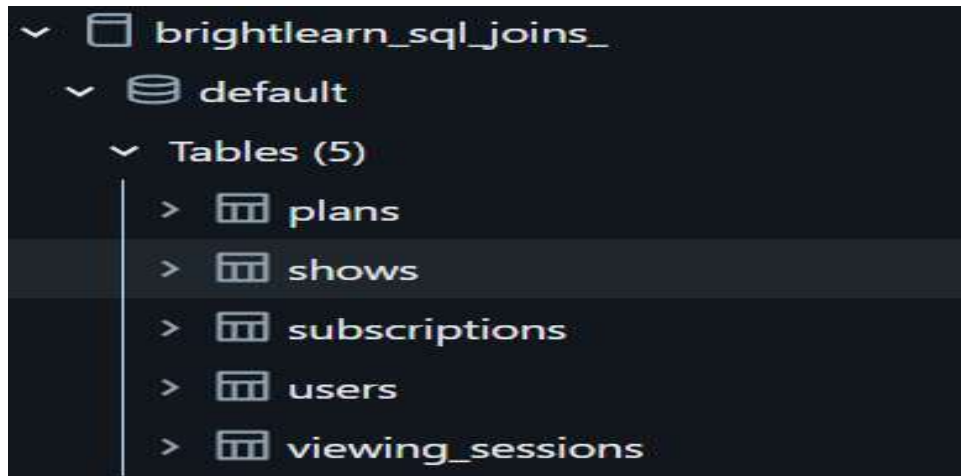

Part A — INNER JOIN

Question1

```
1 ----Question 1---
2 ▼---Show every user who has a subscription. Match users to subscriptions.-----
3 ▼ SELECT
4   `user_name`, `subscription_id`, `start_date`, A.`user_id`
5 FROM brightlearn_sql_joins_.default.users AS A
6 INNER JOIN brightlearn_sql_joins_.default.subscriptions AS B
7 on A.`user_id` = B.`user_id`;
8
```

Results 2 of 2 → Table + 🔍 🏠

subscription_id	User_id	plan_name	monthly_price	plan_id
501	1	Basic	79	10
504	6	Standard	129	11
503	1	Premium	199	12
505	3	Family	249	13
502	2	Standard	129	11

Question 2

```
--Question 2--  
--Show every subscription with its matching plan name and monthly price--
```

```
SELECT  
    `subscription_id`, `User_id`, `plan_name`, `monthly_price`, A.`plan_id`  
FROM brightlearn_sql_joins_.default.plans AS A  
INNER JOIN brightlearn_sql_joins_.default.subscriptions AS B  
ON A.`plan_id` = B.`plan_id`;
```

results 2 of 2 →

Table +

Q F I □ ↶

¹ ₃ subscription_id	¹ ₃ User_id	^A _C plan_name	¹ ₃ monthly_price	¹ ₃ plan_id
501	1	Basic	79	10
504	6	Standard	129	11
503	1	Premium	199	12
505	3	Family	249	13
502	2	Standard	129	11

Question3

```
--Quesion3 --  
--Show every viewing session that has a matching show. Include the show title and genre--
```

```
SELECT  
    `session_id`, `user_id`, `show_title`, genre, `watch_minutes`, A.`show_id`  
FROM brightlearn_sql_joins_.default.shows AS A  
INNER JOIN brightlearn_sql_joins_.default.viewing_sessions AS B  
ON A.`show_id` = B.`show_id`;
```

results 3 of 3 →

Table +

Q F I □ ↶

¹ ₃ session_id	¹ ₃ user_id	^A _C show_title	^A _C genre	¹ ₃ watch_minutes	¹ ₃ show_id
904	7	Comedy Hour	Comedy	20	701
903	1	Crime Time	Drama	60	702
902	2	Tech Tales	Documentary	30	703
901	1	Comedy Hour	Comedy	45	701

Question 4

```
--Question 4--Show every viewing session with the user who watched it. Only show sessions with a matching user--
SELECT
    `user_name`, country, `session_id`,`show_id`,`watch_minutes`, A. `user_id`
FROM brightlearn_sql_joins.default.users AS A
INNER JOIN brightlearn_sql_joins.default.viewing_sessions AS B
ON A.`user_id`= B.`user_id`;
```

	^A _C user_name	^A _C country	¹ ₃ session_id	¹ ₃ show_id	¹ ₃ watch_minutes	¹ ₃ user_id
1	Nomvula	Johannesburg	903	702	60	1
2	David	Cape Town	902	703	30	2
3	Anele	Durban	905	705	90	3
4	Nomvula	Johannesburg	901	701	45	1

Question 5

```
--Question 5- Show users along with their subscriptions, the plan name, and the price. Use only users who have both a subscription
and a valid plan----
SELECT `user_name`,country,`plan_name`, `monthly_price`, `start_date`,A.`user_id`
FROM brightlearn_sql_joins.default.users AS A
INNER JOIN brightlearn_sql_joins.default.subscriptions AS B
ON A.`user_id`= B.`user_id`
INNER JOIN brightlearn_sql_joins.default.plans AS C
ON C.`plan_id`= B.`plan_id`;
```

	^A _C user_name	^A _C country	^A _C plan_name	¹ ₃ monthly_price	 start_date	¹ ₃ user_id
1	Nomvula	Johannesburg	Premium	199	2026-03-10	1
2	David	Cape Town	Standard	129	2026-02-01	2
3	Anele	Durban	Family	249	2026-04-05	3
4	Nomvula	Johannesburg	Basic	79	2026-01-15	1

Part B — LEFT JOIN

Question 6

```
--Question 6 Show every user and any subscriptions they have. Users without subscriptions must still
--appear---
SELECT A.`user_id`,`user_name`,`subscription_id`,`start_date`
FROM brightlearn_sql_joins_.default.users AS A
LEFT JOIN brightlearn_sql_joins_.default.subscriptions AS B
ON A.`user_id` = B.`user_id`;
```

Add parameter

Table  

	¹ ₂ user_id	^A _C user_name	¹ ₂ subscription_id	 start_date
1	1	Nomvula	503	2026-03-10
2	2	David	502	2026-02-01
3	3	Anele	505	2026-04-05
4	4	Kabelo	null	null
5	5	Lerato	null	null
6	1	Nomvula	501	2026-01-15

Question 7

```
8 --Question 7 Show every plan and the subscriptions on it. Plans with no subscribers must stil
9 SELECT A.`plan_id`,`plan_name`,`subscription_id`,`user_id`
10 FROM brightlearn_sql_joins_.default.plans AS A
11 INNER JOIN brightlearn_sql_joins_.default.subscriptions AS B
12 ON A.`PLAN_ID` = B.`PLAN_ID`;
```

Add parameter

Table  

	¹ ₂ plan_id	^A _C plan_name	¹ ₂ subscription_id	¹ ₂ user_id
1	10	Basic	501	1
2	11	Standard	504	6
3	12	Premium	503	1
4	13	Family	505	3
5	11	Standard	502	2

Question 8

```
--- Question 8 Show every show and any viewing sessions on it. Shows that were never watched must
---still appear---
SELECT A.`show_id`,`show_title`,`session_id`,`watch_minutes`
FROM brightlearn_sql_joins_.default.shows AS A
LEFT JOIN brightlearn_sql_joins_.default.viewing_sessions AS B
ON A.`show_id`=B.`show_id`;
```

parameter

¹ ₃ show_id	^A _C show_title	¹ ₃ session_id	¹ ₃ watch_minutes
701	Comedy Hour	904	20
702	Crime Time	903	60
703	Tech Tales	902	30
704	Cooking Lab	null	null
706	Wild Earth	null	null
701	Comedy Hour	901	45

Question 9

```
---Question9 Show every viewing session and the user who watched it. Sessions referencing users that do
not exist must still appear (with NULL user details)---
```

```
SELECT `session_id`,`show_id`,`watch_minutes`,A.`user_id`,`user_name`
FROM brightlearn_sql_joins_.default.users AS A
LEFT JOIN brightlearn_sql_joins_.default.viewing_sessions AS B
ON A.`user_id`= B.`user_id`;
```

parameter

¹ ₃ session_id	¹ ₃ show_id	¹ ₃ watch_minutes	¹ ₃ user_id	^A _C user_name
903	702	60	1	Nomvula
902	703	30	2	David
905	705	90	3	Anele
null	null	null	4	Kabelo
null	null	null	5	Lerato
901	701	45	1	Nomvula

Question 10

```
---Question 10 Show every user, the plan they are on (if any), and the monthly price. Users without a
--subscription must still appear---
select `user_name`, country, `plan_name`, `monthly_price`, A.`user_id`,C.`plan_id`
from brightlearn_sql_joins_.default.users AS A
LEFT JOIN brightlearn_sql_joins_.default.subscriptions AS B
ON A.`user_id`= B.`USER_ID`
LEFT JOIN brightlearn_sql_joins_.default.plans AS C
ON B.`plan_id`= C.`plan_id`;
```

parameter

A ^B C user_name	A ^B C country	A ^B C plan_name	1 ² 3 monthly_price	1 ² 3 user_id	1 ² 3 plan_id
Nomvula	Johannesburg	Premium	199	1	12
David	Cape Town	Standard	129	2	11
Anele	Durban	Family	249	3	13
Kabelo	Pretoria	null	null	4	null
Lerato	Port Elizabeth	null	null	5	null
Nomvula	Johannesburg	Basic	79	1	10

Part C — FULL OUTER JOIN

Question 11

```
1  ---Question 11 Show every user and every subscription, including users without subscriptions AND
2  --subscriptions referencing users that do not exist--
3  SELECT A.`user_id`,`user_name`,`subscription_id`,`start_date`
4  FROM brightlearn_sql_joins_.default.users AS A
5  FULL OUTER JOIN brightlearn_sql_joins_.default.subscriptions AS B
6  ON A.`user_id`= B.`user_id`;
```

Add parameter

Table

	1 ² 3 user_id	A ^B C user_name	1 ² 3 subscription_id	📅 start_date
1	3	Anele	505	2026-04-05
2	4	Kabelo	null	null
3	2	David	502	2026-02-01
4	5	Lerato	null	null
5	1	Nomvula	503	2026-03-10
6	1	Nomvula	501	2026-01-15

Question 12

```
8 --Question 12 Show every plan and every subscription, including plans without subscribers AND any
  subscription referencing a plan that does not exist---
9
10 SELECT A.`plan_id`, `plan_name`, `subscription_id`, `user_id`
11 FROM brightlearn_sql_joins_.default.plans AS A
12 FULL OUTER JOIN brightlearn_sql_joins_.default.subscriptions AS B
13 ON A.`plan_id` = B.`plan_id`;
```

id parameter

plan_id	plan_name	subscription_id	user_id
11	Standard	504	6
14	Mobile	null	null
13	Family	505	3
12	Premium	503	1
10	Basic	501	1
11	Standard	502	2

Question 13

```
--Question 13- Show every show and every viewing session, including shows that were never watched
--AND sessions referencing shows that do not exist.---
SELECT A.`show_id`, `show_title`, `session_id`, `watch_minutes`
FROM brightlearn_sql_joins_.default.shows AS A
FULL OUTER JOIN brightlearn_sql_joins_.default.viewing_sessions AS B
ON A.`show_id` = B.`show_id`;
```

parameter

show_id	show_title	session_id	watch_minutes
704	Cooking Lab	null	null
701	Comedy Hour	904	20
703	Tech Tales	902	30
702	Crime Time	903	60
706	Wild Earth	null	null
701	Comedy Hour	901	45
null	null	905	90

Question 14

```

---Question 14 Show every user and every viewing session, including users with no sessions AND
--sessions referencing users who do not exist--
SELECT A.`user_id`, `user_name`, `session_id`, `show_id`, `watch_minutes`
FROM brightlearn_sql_joins_.default.users AS A
FULL OUTER JOIN brightlearn_sql_joins_.default.viewing_sessions AS B
ON A.`user_id` = B.`user_id`;

```

parameter

¹ ₃ user_id	^A _C user_name	¹ ₃ session_id	¹ ₃ show_id	¹ ₃ watch_minutes
3	Anele	905	705	90
2	David	902	703	30
null	null	904	701	20
1	Nomvula	901	701	45
1	Nomvula	903	702	60
4	Kabelo	null	null	null
5	Lerato	null	null	null

Question 15

```

---Question 15 Show every user, every subscription, and every plan in one query – using FULL OUTER JOIN
throughout. This is the hardest question – get all gaps visible at once---
SELECT A.`user_id`, `user_name`, `subscription_id`, C.`plan_id`, `plan_name`
FROM brightlearn_sql_joins_.default.users AS A
FULL OUTER JOIN brightlearn_sql_joins_.default.subscriptions AS B
ON A.`user_id` = B.`user_id`
FULL OUTER JOIN brightlearn_sql_joins_.default.plans AS C
ON B.`plan_id` = C.`plan_id`;

```

parameter

¹ ₃ user_id	^A _C user_name	¹ ₃ subscription_id	¹ ₃ plan_id	^A _C plan_name
2	David	502	11	Standard
null	null	504	11	Standard
3	Anele	505	13	Family
1	Nomvula	503	12	Premium
4	Kabelo	null	null	null
5	Lerato	null	null	null
1	Nomvula	501	10	Basic
null	null	null	14	Mobile

BONUS QUESTIONS

- 1.Kabelo an Lerato have not subscribed to any plan
- 2.User 6 (subscription ID 504) does not exist in the user table
- 3.WildEarth and Cooking Lab have never been watched
4. Session ID 905
- 5.Mobile has no subscribers