

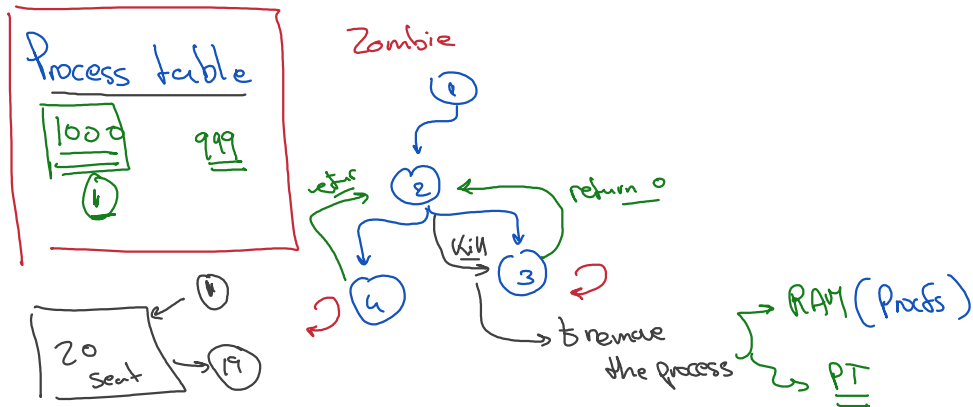


- ① popular & used in most distribution
- ② you will chose for your distribution
- ③ open source
- ④ support several issue that can be triggered among process
- ⑤ parallelism

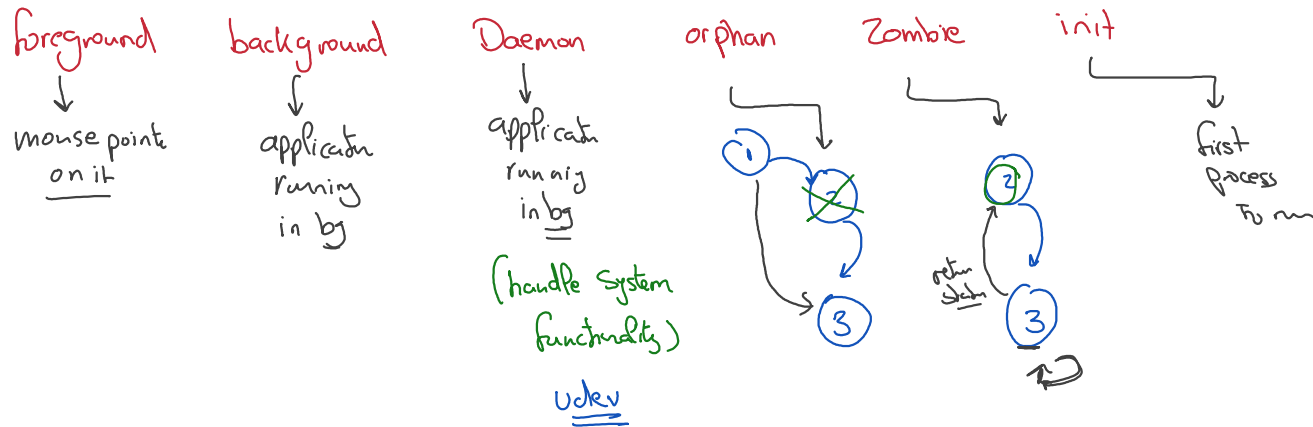

System D
↳ daemon

(init)

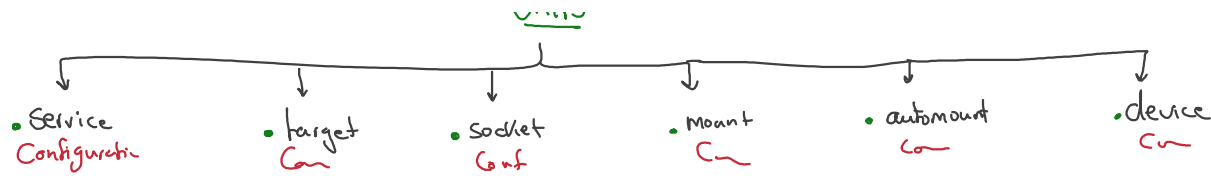


Service

↳ run application without user interaction

↳ Depends

my application • Service → it will run automatically
base which target (Runlevel) it's mapped

Describe:
what the systemd need to do for you

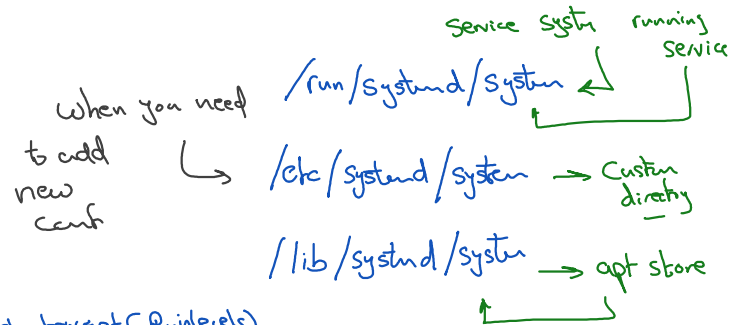

SystemD

systemctl

- stop - stop service
- status
- depend
- edit

how to write service file Configuration




[Unit] metadata

↳ Description


↳ when to run (who will run you)

[Service] how to run the application


[Install] map unit booting

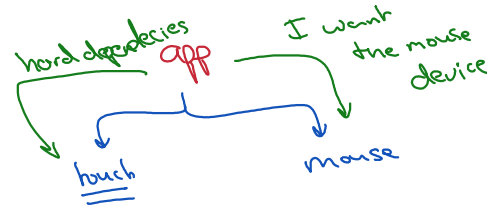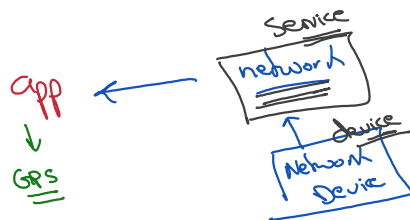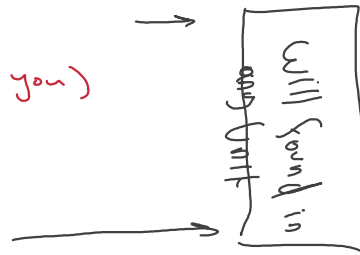

PC

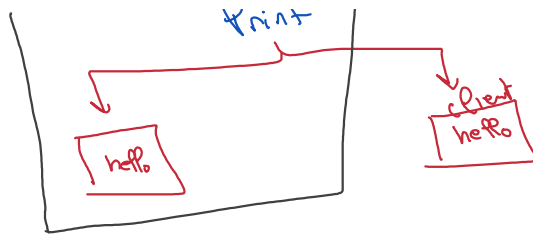

target (Runlevel)
Container

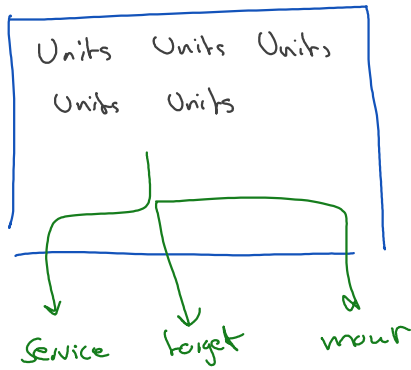


Systemd → default target


Systemctl get-default
↳ graphical-target

Systemctl set-default

two Important

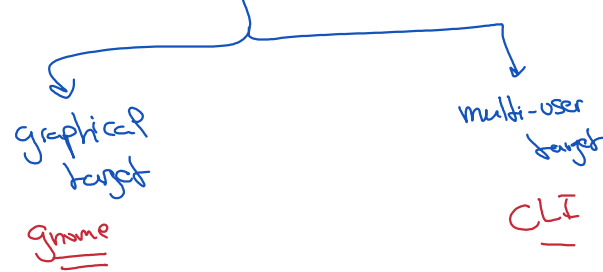

qtapp

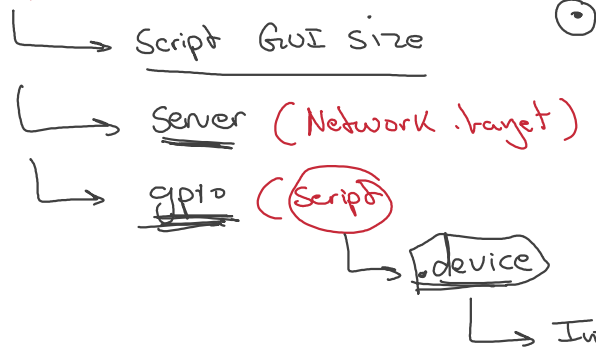

RPI

↳ gpio

└─ QTAPP

SystemD Commands

Systemctl start
stop
list-dependencies
daemon-reload
enable
disable
cat

journalctl -u unit

① Caplock

└─ Connect server

