

Any user will create new package

① create Layer

② Layer it's just a normal directory
Standard ← meta - [Name]

Example :

meta-raspberrypi (BSP)

meta-qt6 (Application package)

QT application

↳ Layer (Application package)
Software

Poky

Script (bitbake)

Variable

```
bitbake
contrib
documentation
LICENSE
LICENSE.GPL-2.0-only
LICENSE.MIT
MAINTAINERS.md
Makefile
MEMORIUM
meta
meta-bsp
meta-poky
meta-selftest
meta-skeleton
meta-yocto-bsp
oe-init-build-env
README.hardware.md -> meta-yocto-bsp/README.hardware.md
README.md -> README.poky.md
README.oe-core.md
README.poky.md -> meta-poky/README.poky.md
README.qemu.md
scripts
SECURITY.md
```

oe (helpers)

Distro

Just used for testing (development)

Layer BSP example board

↳ used by yocto

example
BSP
layer

① Board Raspberrypi

no content

Package

Application
Package

Board
Support
Package

user space

System call

Generic

System call

U-boot

Kernel

modules

DTB

Compiler

Board specific

bitbake core-image-minimal

Summary:

① history yocto

U de website

② Kirkstone

③ check BSP available

④ Library QT

② releases

③ bitbake

④ poly directory

⑤ layer classified

② Setup Environment

① git clone poly -b kirkstone

② git clone rp1 -b kirkstone

③ git clone qt -b kirkstone

④ git clone oe -b kirkstone

⑤ all oe layer support

Pythone

③ Adding Layers needed

① BSP → rasp

② python, oe

} bitbake-layers add-layer


../meta-rasp

../meta-python

../meta-oe

④ Describe which package from layer added you need

EXTRA_IMAGE_FEATURES ?= "debug-tweaks python"

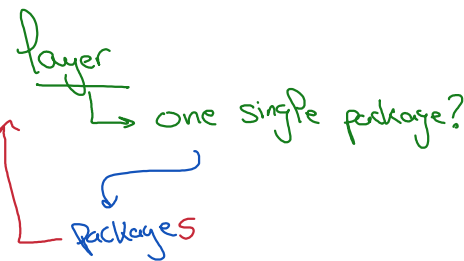

Any layer added → build/conf
→ bbayers.conf

Task

↳ Python
 ↳ script GPIO
 ↳ Disk