

To write a Recipe you need a Layer

① bitbake -layers create-layer /home/fady/yacht/meta-podcast

② there will be Layer created automatically (Directory)



what is Layer.conf

```
# We have a conf and classes directory, add to BBPATH
BBPATH .= ":{LAYERDIR}"
# We have recipes-* directories, add to BBFILES
BBFILES += "${LAYERDIR}/recipes-*//*.bb"
BBFILES += "${LAYERDIR}/recipes-*//*.bbappend"
BBFILE_COLLECTIONS += "meta-podcast"
BBFILE_PATTERN_meta-podcast = "^${LAYERDIR}/"
BBFILE_PRIORITY_meta-podcast = "6"

LAYERDEPENDS_meta-podcast = "core"
LAYERSERIES_COMPAT_meta-podcast = "kirkstone"
```

BBPATH → bitbake root path Layer

LAYERDIR

→ /home/fady/yacht/podcast

bitbake -layer add layer /==/


BBFILES → bitbake want to know where are your target located

BBFILE_COLLECTIONS → what is your layer name

LAYERDEPENDS → layer depends on which layer

LAYERSERIES_COMPAT = kirkstone

→ Layer compatible which bitbake version

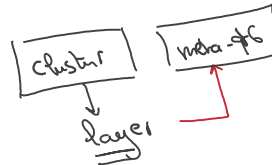



(1) Example

I need bitbake to run a target for me

bitbake [recipe]
• bb

(2) recipe (target)

What & how the bitbake shall create your target

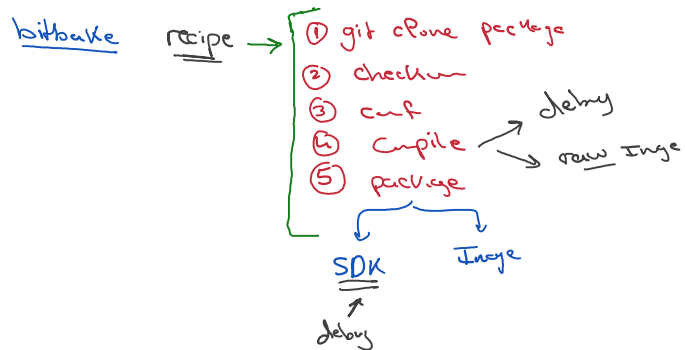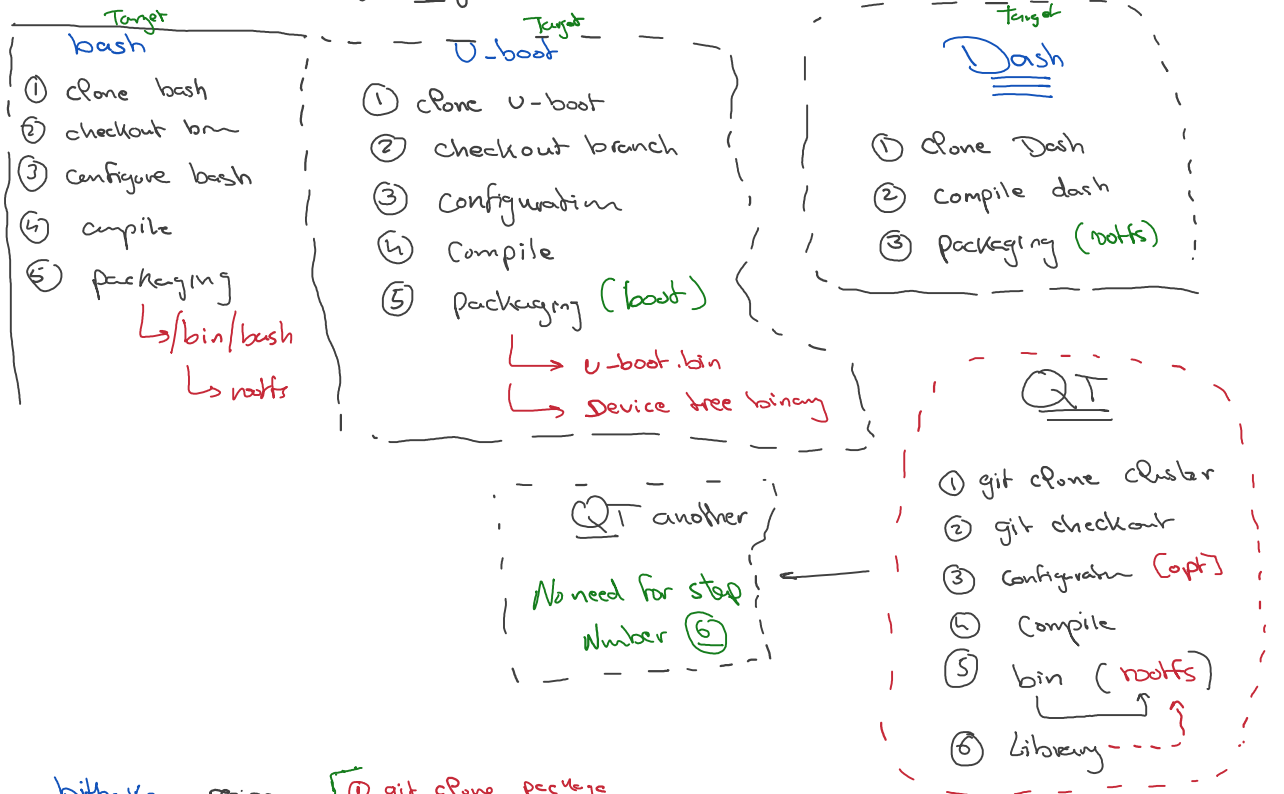

recipe.txt → bitbake

Recipe → Tasklist

↳ do -

task

recipe.py

tasklist

Python Script

Custom
task

```
do_build
do_checkuri
do_clean
do_cleanall
do_cleanstate
do_compile
do_configure
software being built
do_deploy_source_date_epoch
do_deploy_source_date_epoch_setscene
do_devshell
do_display_banner
do_fetch
do_install
do_listtasks
do_package
d_files
do_package_qa
do_package_qa_setscene
do_package_setscene
d_files (setscene version)
do_package_write_rpm
do_package_write_rpm_setscene
do_packagedata
do_packagedata_setscene
)
do_patch
do_populate_lic
do_populate_lic_setscene
setscene version)
do_populate_sysroot
to other recipes
do_populate_sysroot_setscene
to other recipes (setscene version)
do_prepare_recipe_sysroot
```

← These are default
task created by
bitbake by default