
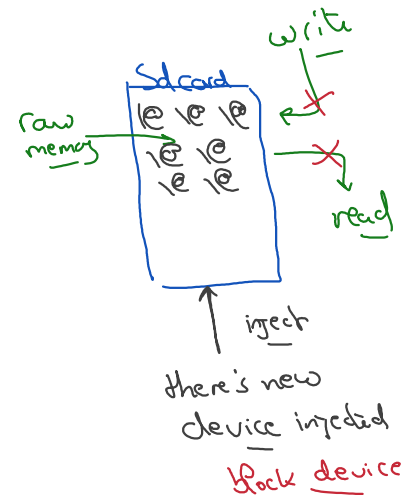
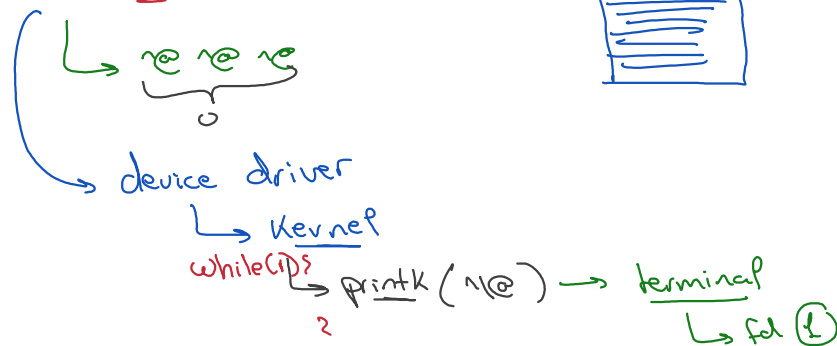



① reserve 1GB

ⓐ touch file
1GB characters (bad way)



ⓑ dd command

dd if= of= bs= Count=

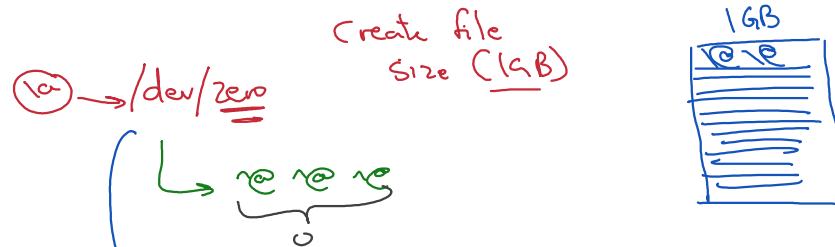




I want to use virtualsd.img
 ↳ as a block Device
 ↳ storage

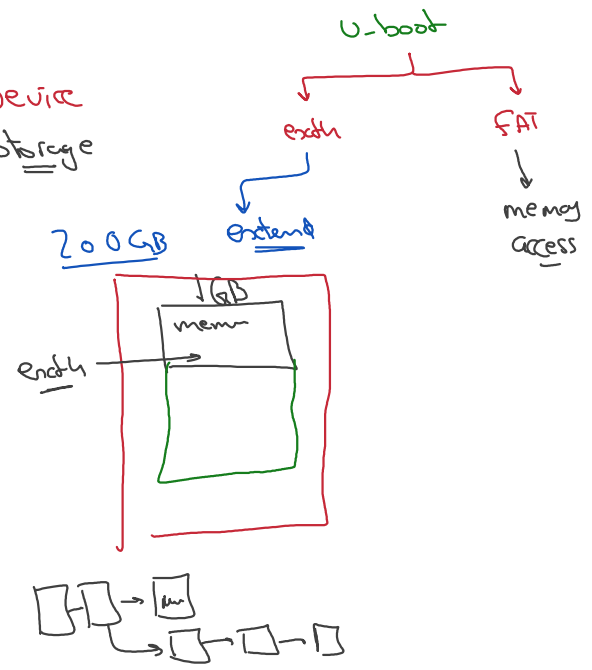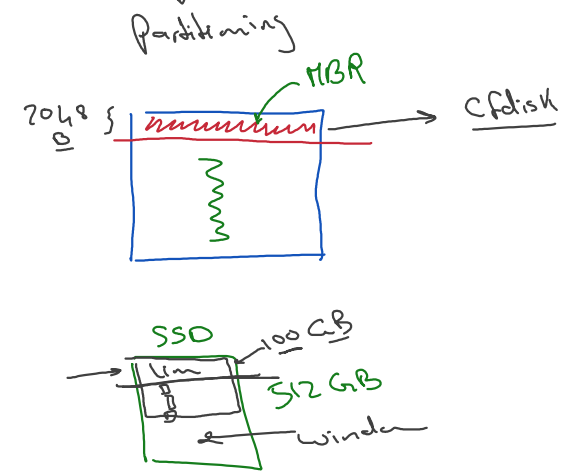

losetup -f --show --partscan virtualsd.img

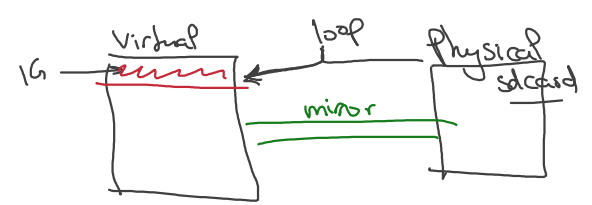

loop device
 ↳ emulator

Emulator

RPI

>

loop device

loop
mkfs.fat
mkfs.ext4

