

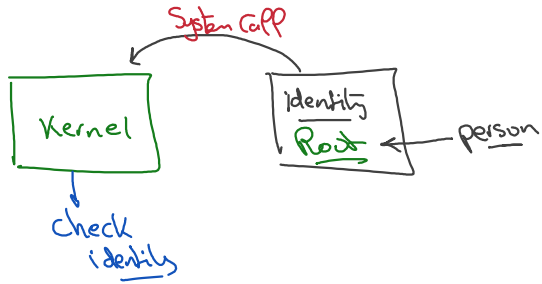


User Root ← he has all privilege in level of user space
 ← slave in linux perspective
 ← kernel who created the root user (0) id



Switch user
 → Root

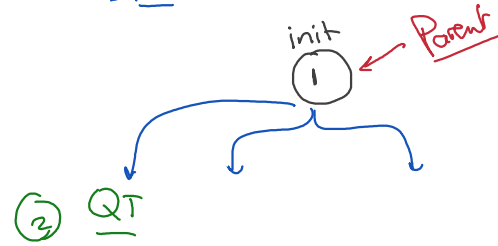



to write init process

```
#include <stdio.h>
int main() {
    printf("hello");
}
```

→ fady.elf

- ① kernel create root user
- ② kernel run the first init process in the system ?

- ③ How kernel will find the executable

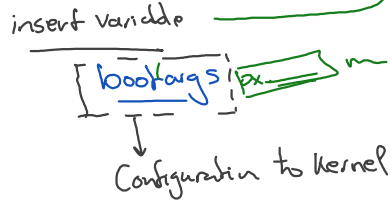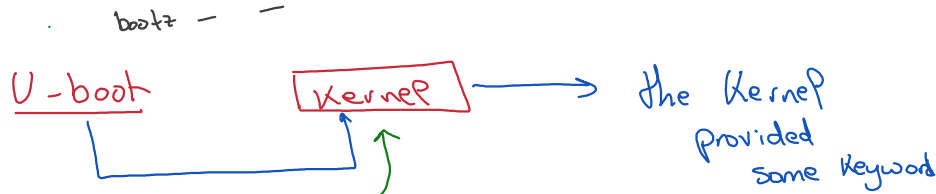

init process
 → init = fady.elf
 → root = /dev/mmcblk0p2
 → rootfstype = ext4
 → rw
 mount the file syst
 as read write

How to not keep writing the u-boot command over & over?

Variables

Set loadkernel `load mmc 0:1 $kernel_addr_r zimage`
Set load dtb `----- $fdt_addr_r ----- .dtb`
Set bootargImage `bootz $kernel_addr - $fdt_addr_r`

Screenw

Set script `run loadkernel ; run loaddtb ; run bootargImage`

Set bootcmd `run script`

Special variable for u-boot
to run the command
after autoboot

