
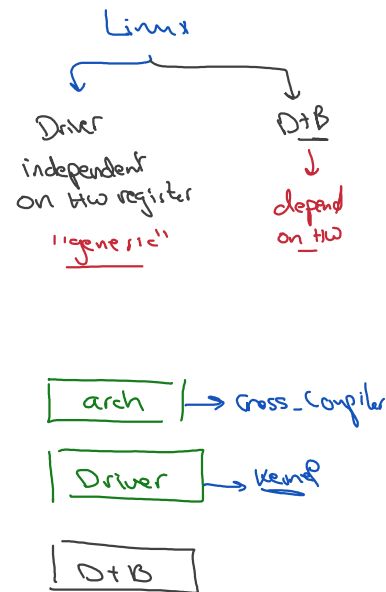
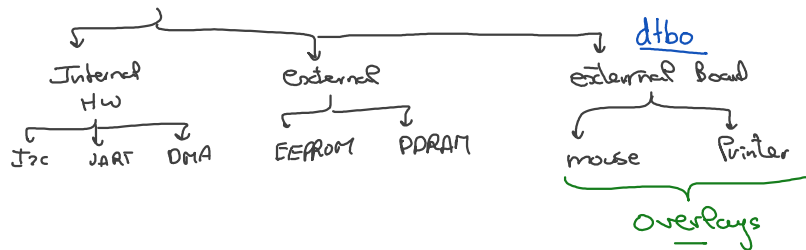
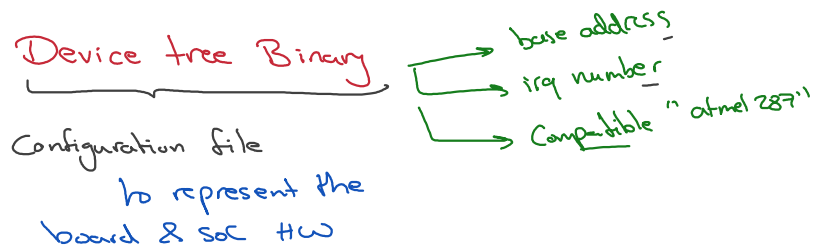
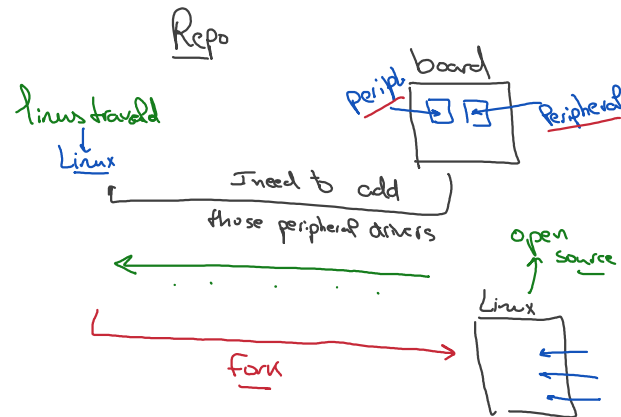


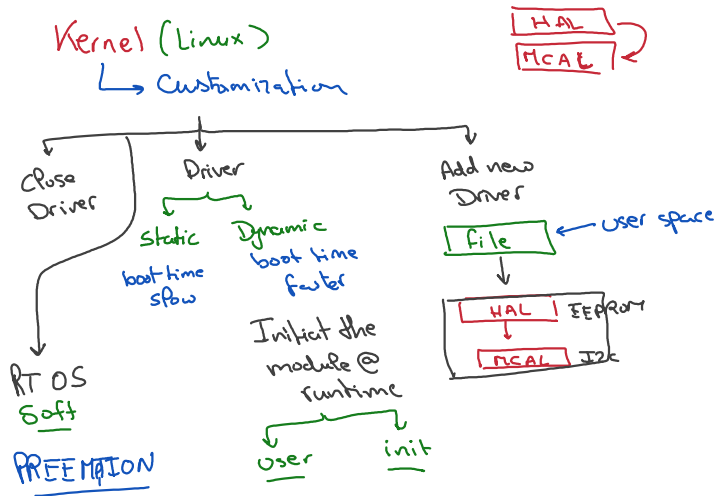

U-boot ↔ Kernel

bootargs = Define some keywords

↳ that kernel need it to bootup

root → root fs on which device /dev/mmcblk0p2

rootfstype → ext4

... .. /etc/init

init → where to find the init process in the roots /init /sbin/
Console → terminal connected on which device /dev/ttyS0 , ttyAMA0
rootwait → wait till the filesystem is mounted
rw → read write permission on the roots

DASH

↳ simple shell

① git clone dash

② compile aarch64 --static