



IT OPERATIONS DEPARTMENT

IT Service Desk

Operations Manual

FY2026 · Internal Document

APPLIES TO	Service desk analysts, resolver groups, service owners and delivery managers
COVERS	Incident management, escalation, the knowledge base, problems and known errors, change, and the AI Suggested Response pilot
SITES	Dubai and Cairo · single queue, follow-the-sun
DOCUMENT OWNER	Nourhan Abdelrahman — Service Delivery Manager, IT Operations
PUBLISHED	11 August 2026
NEXT REVIEW	10 August 2027
CLASSIFICATION	Internal. Not for distribution outside BARQ Systems or its contracted service partners.

Contents

Document control	5
1. About this manual.....	6
1.1 Purpose and audience	6
1.2 How to find things	6
1.3 Conventions	7
2. The service desk	8
2.1 Operating model	8
2.2 Channels	8
2.3 Roles	9
2.4 Contact routes	9
3. Incident management	10
3.1 The lifecycle	10
3.2 Incident or request	10
3.3 Priority	10
3.4 Response and resolution targets	11
3.5 Holds, chasing and the no-contact rule.....	11
3.6 Journalling	12
4. Escalation.....	13
4.1 When to escalate.....	13
4.2 The escalation matrix	13
4.3 The desk card	14
5. Service catalogue and supported estate	15
5.1 How to read this catalogue.....	15
5.2 The catalogue	15
5.3 Criticality definitions	16
6. Knowledge base articles	17
6.1 Article index.....	17
6.2 Symptom finder.....	17
6.3 KB0005 — the archived scan.....	18
6.4 KB0001 — VPN authentication fails after a password change	18
6.5 KB0002 — Outlook shows Disconnected and no mail is delivered	19
6.6 KB0003 — Mapped shared drive is missing after sign-in.....	19
6.7 KB0004 — Print jobs queue but nothing prints	20
6.8 KB0005 — Account is locked after repeated failed sign-ins	20
6.9 KB0006 — Multi-factor authentication after a lost or replaced device	21

6.10 KB0007 — Laptop performance degrades after a system update.....	21
6.11 KB0008 — SAP GUI connection times out with RFC_ERROR_COMMUNICATION	22
6.12 KB0009 — Wi-Fi drops repeatedly on the 5 GHz corporate network	22
6.13 KB0010 — Order service connection pool exhaustion.....	23
7. Worked incident records.....	25
7.1 What the record looks like	25
7.2 INC0010023 — VPN authentication failure after a password reset.....	25
7.3 INC0010047 — a fault with no article behind it	26
7.4 INC0010064 — three symptoms, one cause	27
7.5 INC0010052 — escalated without being touched.....	28
8. Problems and known errors	29
8.1 The difference, and why it matters at the desk.....	29
8.2 Open problem register	29
8.3 Known error register	29
9. Major incident report MIR-2026-03.....	31
9.1 Summary	31
9.2 What happened	31
9.3 Timeline.....	31
9.4 The bridge whiteboard	32
9.5 Root cause.....	32
9.6 Actions.....	33
10. Change management.....	34
10.1 What the desk needs to know	34
10.2 Pre-approved standard changes	34
10.3 Emergency approval.....	34
10.4 Approval record — CHG0030455 against INC0010052	35
11. The AI Suggested Response pilot	36
11.1 What it does, and what it may not do	36
11.2 How a suggestion is produced	37
11.3 Eligibility.....	38
11.4 Three gates, and what each outcome means to you.....	39
11.5 Where the drafts come from	40
11.6 Safety controls.....	41
11.7 Configuration	41
11.8 Reading the run log.....	42
11.9 Integration payload	42
12. Reporting	44
12.1 The monthly service review.....	44

12.2 Reporting to service delivery managers.....	44
12.3 What is not reported	45
Appendix A · Glossary	46
Appendix B · Templates	47
B.1 Escalation handover.....	47
B.2 Requester update	47
B.3 No-contact resolution.....	47
B.4 Knowledge article proposal.....	47
Appendix C · Impact and urgency worksheet.....	49
Appendix D · Directory	50
Appendix E · Identifier index.....	51

Document control

This manual is a controlled document. The copy of record is the published version in the knowledge base; printed and downloaded copies are uncontrolled and may be superseded without notice. Check the edition and the review date on the cover before relying on any procedure in it.

Version history

EDITION	DATE	AUTHOR	SUMMARY OF CHANGE	APPROVED BY
4.0	11 Aug 2026	H. Moawad, Knowledge Manager	Service catalogue refreshed against the FY2026 estate. Section 11 added for the AI Suggested Response pilot.	N. Abdelrahman
	11 Aug 2026	D. Halim, Problem Manager	Known error register aligned to the problem records raised after MIR-2026-03.	N. Abdelrahman
3.2	02 Apr 2026	H. Moawad, Knowledge Manager	KB0010 revised to version 2 following the 14 March order-processing outage. Version 1 retired.	K. Selim
	02 Apr 2026	O. Sabry, Service Desk Team Lead	Priority matrix corrected: P2 now requires a named service owner on the bridge.	K. Selim
3.1	19 Jan 2026	H. Moawad, Knowledge Manager	Escalation matrix updated for the Identity & Access reorganisation.	N. Abdelrahman
3.0	06 Oct 2025	H. Moawad, Knowledge Manager	Annual review. Manual restructured into twelve sections and the identifier index added.	N. Abdelrahman

Ownership and review

Document owner	Nourhan Abdelrahman — Service Delivery Manager, IT Operations
Author and maintainer	Hesham Moawad — Knowledge Manager
Classification	Internal. Not for distribution outside BARQ Systems or its contracted service partners.
Review cycle	Annual, or within 20 working days of any major incident report that names a procedure in this manual
Current edition	4.0 · published 11 August 2026
Next scheduled review	10 August 2027
Feedback	Raise a request against the <i>Knowledge — content correction</i> catalogue item, or comment on the article in the knowledge base
External contribution	Section 11 was drafted with Sprints (sprints.ai) during the AI Suggested Response pilot

1. About this manual

1.1 Purpose and audience

This manual is the working reference for everyone who handles an incident at BARQ Systems: service desk analysts on Tier 1, the resolver groups they escalate to, the service owners who accept those escalations, and the delivery managers who report on the result. It states what we have agreed to do, how quickly, and who decides when the agreed answer does not fit.

It is deliberately operational. It does not describe architecture, it does not justify tooling choices, and it does not replace vendor documentation. Where a procedure depends on a system whose behaviour we do not control, the procedure says so and names the team who owns the relationship.

Tier 1 analysts	Sections 3, 4 and 6 are your working set. Section 7 shows what a well-handled ticket looks like end to end.
Resolver groups	Sections 4, 5 and 8. Read the known error register before you accept an escalation — half of what reaches you is already documented.
Service owners	Sections 5, 9 and 10. Your acceptance criteria for a change and your obligations during a major incident are here.
Delivery managers	Sections 3, 9 and 12. The SLA definitions in 3.4 are the ones reported against in the monthly service review.
New joiners	Read Sections 1 to 4 in your first week. Do not read Section 6 end to end — it is a reference, and you will search it, not remember it.

1.2 How to find things

Everything in this manual carries an identifier that is also searchable in the ticketing system. If you have the identifier, search there first — the record is live and this document is a snapshot.

PREFIX	RECORD TYPE	WHERE IT LIVES
KB · KB0001	Knowledge article	Section 6 of this manual, and the published knowledge base. The manual carries the text as at the edition date; the knowledge base carries the current version.
INC · INC0010023	Incident	The ticketing system. Section 7 reproduces a small number of closed incidents as worked examples.
PRB · PRB0040012	Problem	The problem register. Open problems are summarised in Section 8.
KE · KE0000034	Known error	The known error register in Section 8.2. Every known error names its workaround and its permanent fix, if one is planned.
CHG · CHG0030455	Change	The change calendar. Section 10 covers the procedure; the calendar is authoritative for dates.
RITM · RITM0010877	Request item	The service catalogue. Requests are not incidents — see 3.2 for the distinction and why it matters.
MIR · MIR-2026-03	Major incident report	Section 9. One report per declared major incident, published within ten working days.

Appendix E lists every identifier used in this manual against the section it appears in. If someone quotes you a number and you do not recognise it, start there.

1.3 Conventions

- **Field labels** appear in Title Case as they render on the form — Assignment group, Business service. Underlying column names appear in code style, as `assignment_group`, and only where a procedure requires you to type one.
- **Times** are Gulf Standard Time (UTC+04) unless a clock is named otherwise. Cairo-based staff should note that the service desk runs on GST, not on local time.
- **Working hours** means 08:00 to 18:00 GST, Sunday to Thursday. **Extended hours** and **out of hours** are defined in 2.1 and are not interchangeable.
- **Must**, **should** and **may** carry their ordinary contractual weight. A step marked Must has been agreed with a service owner and skipping it is a deviation to be recorded, not a judgement call.

2. The service desk

2.1 Operating model

The desk runs a follow-the-sun pattern across two locations with a single queue. An analyst in either location can pick up any incident; the shift pattern determines who is expected to, not who is permitted to.

COVERAGE	DUBAI		CAIRO	
	HOURS (GST)	ANALYSTS	HOURS (GST)	ANALYSTS
Working hours	08:00 – 18:00	6	09:00 – 19:00	5
Extended hours	18:00 – 22:00	2	—	—
Out of hours	on-call	1 + escalation	on-call	—
Friday	on-call	1	10:00 – 16:00	2
Saturday	—	—	10:00 – 16:00	2

Cairo covers Saturday; Dubai covers Friday

The two locations do not observe the same weekend, and the rota is built around that rather than in spite of it. An incident raised on a Friday morning is a Cairo incident by default, and one raised on a Saturday is a Dubai on-call incident only if it is P1 or P2.

2.2 Channels

CHANNEL	HOURS	CREATES	NOTES
Self-service portal	24/7	Incident or request	Preferred. The requester chooses the category, which is why category is unreliable and is re-checked at triage.
Telephone	Working + extended	Incident	Analyst raises the record while on the call. Never close a phone incident without a written summary in the journal.
Email to the desk	24/7	Incident	Parsed into an incident with category <i>inquiry</i> . Always re-categorise at triage; the parser cannot.
Teams channel	Working hours	Nothing	Triage and chase only. A conversation is not a ticket. If it turns into work, raise the record and post the number back.
Monitoring alert	24/7	Incident	Raised automatically against the affected service with priority derived from the alert severity. See 3.3.

2.3 Roles

Tier 1 analyst	Owns the incident from creation to resolution or handover. Applies documented knowledge, keeps the requester informed, and escalates on the clock rather than on frustration. An analyst may not close an incident they escalated without confirmation from the resolver group.
Team lead	Owns the queue, not the tickets. Runs triage twice a day, rebalances load, and is the first authority on a priority dispute. Approves any P3 that an analyst wants to raise to P2.
Resolver group	Accepts escalations within its service scope. May reject an escalation once, with a written reason and a named alternative group. A second rejection goes to the service owner, not back to the desk.
Service owner	Accountable for the service in Section 5. Approves emergency changes against it, joins the bridge for P1 and P2, and signs off the post-incident review.
Major incident manager	A rostered role, not a job title. Takes command when a major incident is declared, and holds it until the review is published. During that period their instruction outranks this manual.
Knowledge manager	Owns Section 6. Publishes, revises and retires articles, and is the only role that may set an article to retired.

2.4 Contact routes

The full directory, including out-of-hours numbers, is in Appendix D. The routes below are the ones needed during an incident and are repeated there.

NEED	ROUTE	WHEN
Raise or chase an incident	Portal, then phone	Any time. Chasing by Teams does not update the clock.
Declare a major incident	Major incident bridge	P1 always. P2 when two or more services are affected.
Reach a resolver group out of hours	On-call rota, Appendix D	P1 and P2 only. P3 waits for working hours.
Emergency change approval	Change manager, then service owner	Both are required. Neither alone is sufficient — see 10.3.
Knowledge correction	Catalogue item <i>Knowledge</i> — <i>content correction</i>	Any time. Do not edit a published article directly.

3. Incident management

3.1 The lifecycle

An incident is an unplanned interruption to a service, or a reduction in its quality. It moves through six states. Only two of them stop the SLA clock, and knowing which two is most of what an analyst needs to understand about the process.

STATE	VALUE	MEANS	CLOCK	WHO MAY SET IT
New	1	Created, not yet picked up.	Running	Anyone. Set automatically on creation.
In Progress	2	An analyst or resolver group is working it.	Running	The assignee.
On Hold	3	Waiting on the requester, a supplier or a scheduled window.	Paused	The assignee, with a reason code. See 3.5.
Resolved	6	A fix has been applied and the requester has been told.	Stopped	The assignee.
Closed	7	Resolved and either confirmed or auto-closed after five working days.	Stopped	Automatic, or the requester.
Cancelled	8	Raised in error, duplicate, or not an incident.	Stopped	Team lead only.

3.2 Incident or request

Something broken is an incident. Something wanted is a request. The distinction decides the SLA, the approval path and the reporting line, so it is settled at triage and not later.

INCIDENT	REQUEST
▪ “I cannot connect to the VPN since my password reset.” ▪ “Outlook says Disconnected and no mail has arrived since 08:00.” ▪ “The shared drive that was mapped yesterday is gone.” ▪ “The order service is returning 500s.”	▪ “Please order me a second monitor.” ▪ “I need access to the finance folder.” ▪ “When will my expense claim be paid?” ▪ “Can you install the design suite on my laptop?”
Resolution targets in 3.4. No approval required to work it.	Fulfilment targets are set per catalogue item. Most require an approval before any work begins.

Two cases cause most of the argument. **Access that used to work and has stopped** is an incident — something broke. **Access that never existed** is a request, even when the person urgently needs it. And **a question with no fault behind it** is neither: answer it, log it as an inquiry, and do not let it consume an incident slot.

3.3 Priority

Priority is derived, not chosen. Impact and urgency are set at triage and the matrix does the rest. An analyst who wants a different priority changes the impact or the urgency and says why in the journal; they do not overwrite the derived value.

	URGENCY			
	1 – HIGH	2 – MEDIUM	3 – LOW	
Impact 1 – Enterprise	P1	P1	P2	Whole service, or a site
Impact 2 – Department	P1	P2	P3	A team or a floor
Impact 3 – Individual	P2	P3	P4	One person
A monitoring alert sets impact from the affected service's criticality in Section 5, and urgency from the alert severity. An analyst may lower a derived P1 only with the team lead's agreement, recorded in the journal.				

3.4 Response and resolution targets

The clock starts when the incident is created, not when it is picked up. It pauses on hold and stops on resolved. Targets are measured against working hours for P3 and P4, and against elapsed time for P1 and P2.

PRIORITY	RESPONSE	RESOLUTION	UPDATE CADENCE	CLOCK BASIS
P1	15 minutes	4 hours	Every 30 minutes	Elapsed, 24/7
P2	30 minutes	8 hours	Every 2 hours	Elapsed, 24/7
P3	4 working hours	3 working days	Daily	Working hours
P4	1 working day	5 working days	On change of state	Working hours

- **Response** means a human has read the incident and written something in the journal that is specific to it. An auto-acknowledgement is not a response and does not stop the response clock.
- **Resolution** means the service is working again for the requester, confirmed by the requester where they are reachable. A workaround counts as a resolution if the requester can work; the underlying fault then becomes a problem record under Section 8.
- **Breach** is recorded automatically and cannot be edited. If a target was missed for a reason outside our control, that reason belongs in the journal and in the monthly service review, not in an adjustment to the record.

3.5 Holds, chasing and the no-contact rule

REASON CODE	MAX HOLD	WHAT MUST HAPPEN BEFORE AND AFTER
awaiting_user	5 working days	Two chases at least one working day apart, both recorded. After the second chase with no reply, resolve with the no-contact resolution code and tell the requester how to reopen.
awaiting_supplier	Per contract	The supplier reference goes in the journal. A hold with no supplier reference is not a supplier hold.
awaiting_change	To the window	The CHG number goes in the journal. The hold is released when the change closes, not when it is approved.
awaiting_parts	10 working days	Expected date recorded and updated weekly. Beyond ten days, raise a request instead and resolve the incident.
scheduled_with_user	To the appointment	Date and time agreed with the requester in writing. Missing an agreed appointment is a breach even when the clock was paused.

3.6 Journalling

The journal is the record. Six months from now, an auditor, a service owner or a colleague picking the ticket up will have nothing else. Two fields, and they are not interchangeable.

WORK NOTES · INTERNAL	ADDITIONAL COMMENTS · THE REQUESTER SEES THESE
▪ What you checked and what you found ▪ Commands run and their output ▪ Why you ruled a cause out ▪ Which article you applied, by number ▪ Who you spoke to and what they said	▪ What you are doing, in the requester's language ▪ What you need from them, and by when ▪ What changed and whether they need to act ▪ Never: internal names, host names, colleagues' opinions, or the phrase "as per the KB"

Write the article number, every time

"Applied KB0001, cleared the cached credential, confirmed connection" takes four seconds longer to type than "fixed" and is the difference between a knowledge base we can measure and one we cannot. Article usage is reported monthly in Section 12, and it is the only evidence we have for which articles deserve to survive the next review.

4. Escalation

4.1 When to escalate

Escalate on the clock, not on frustration. An incident is escalated when the analyst has exhausted the documented knowledge for its category and the next response target is inside the next hour — whichever comes first. Escalating earlier is not a failure; holding a ticket past its target because you nearly have it is.

PRIORITY	ESCALATE IF UNRESOLVED AFTER	TO	AND ALSO
P1	15 minutes, or immediately if the cause is unknown	Resolver group and the major incident bridge	Service owner paged. Bridge stays open until the service is restored.
P2	1 hour	Resolver group	Team lead informed. Service owner informed if two or more services are involved.
P3	1 working day	Resolver group	Nothing further unless the group rejects the escalation.
P4	3 working days	Resolver group, or convert to a request	Check first that it is not a request in disguise — see 3.2.

4.2 The escalation matrix

Grouped by the service area that owns the escalation. The first line is the standing route; the second is who takes it if the first does not acknowledge inside the acknowledgement window.

AREA	TRIGGER	FIRST ROUTE	IF NO ACK IN 15 MIN
Network	VPN, remote access, site links	Network Operations	NetOps duty lead
	Corporate Wi-Fi, roaming, coverage	Network Operations	NetOps duty lead
	Firewall or segmentation change	Network Security	Head of Infrastructure
Identity	Lockouts, password policy, directory	Identity & Access	IAM duty lead
	MFA reset or device re-enrolment	Identity & Access	IAM duty lead
	Suspected compromise	Security Operations, immediately	CISO on-call — do not wait 15 minutes
Applications	SAP availability or connectivity	SAP Basis	SAP service owner
	Order processing and fulfilment	Platform Engineering	Head of Platform Engineering
	Mail flow and collaboration	Collaboration Services	Collaboration duty lead
Endpoint	Laptop, desktop, peripherals	Endpoint Engineering	Endpoint duty lead
	Print and reprographics	Print Services	Facilities duty manager

A rejected escalation comes back once, and once only

A resolver group may return an escalation with a written reason and a named alternative group. The analyst routes it to that group. If the second group also rejects it, the incident goes to the service owner listed in Section 5 — not back to the desk, and not around the loop again. Two rejections is a routing problem, and routing problems are owned above the desk.

4.3 The desk card

The card below is laminated at every desk position and pinned in the Cairo operations room. It is reproduced here because it is the version people actually follow, and because it is reissued whenever 4.1 or 4.2 changes.

Two columns, one figure, one footnote

The webhook returns 202 Accepted before retrieval or generation has run. This is not an optimisation; it is the contract.

ServiceNow's outbound call is synchronous and holds a worker thread while it waits. Retrieval plus generation takes seconds to tens of seconds. A webhook that waited would exhaust the platform's outbound capacity under any realistic burst, slow the instance for every user, and time out anyway.

202 means the service has taken responsibility for the event. That promise is only real because the idempotency key was persisted before the reply was sent.

Answering 202 and then failing to store the key means the event can be replayed into a second suggestion, which is the exact failure the status code was meant to rule out.¹

Order of operations



Only the fourth step writes to ServiceNow on the request path.

¹ See KB-12 for the atomic claim statement.

The escalation and acceptance card, issue 4. Reissued with every edition of this manual.

5. Service catalogue and supported estate

5.1 How to read this catalogue

Each service carries a criticality, a service owner, a support window and the resolver group that owns incidents against it. Criticality feeds the impact column of the priority matrix in 3.3, so changing it is a governance decision and not a desk decision.

Support windows are stated in Gulf Standard Time and follow the desk pattern in 2.1¹. A service marked **24/7** is covered by the on-call rota out of hours for P1 and P2 only; P3 and P4 against a 24/7 service still wait for working hours².

5.2 The catalogue

SERVICE	CRITICALITY	OWNERSHIP AND WINDOW		NOTES
order-processing	Tier 1	FIELD	VALUE	Revenue-bearing. Any P1 goes straight to the bridge. Remediation is change-controlled — see KB0010 and CHG0030455.
		Owner	K. Selim	
		Group	Platform Eng	
		Window	24/7	
identity	Tier 1	FIELD	VALUE	Underpins every other service. A lockout here presents as a fault in three or four services at once — see 7.4.
		Owner	N. Abdelrahman	
		Group	Identity & Access	
		Window	24/7	
sap-erp	Tier 1	FIELD	VALUE	Not reachable from the internet. Confirm VPN before troubleshooting anything else. KE0000034 applies.
		Owner	K. Selim	
		Group	SAP Basis	
		Window	06:00–22:00	
corporate-email	Tier 2	FIELD	VALUE	Distinguish a single-user fault from a service event before applying any per-user fix. KB0002.
		Owner	O. Sabry	
		Group	Collaboration	
		Window	24/7	
corporate-vpn	Tier 2	FIELD	VALUE	Highest article usage on the desk. KB0001 alone accounts for roughly one in twenty incidents.
		Owner	L. Haddad	
		Group	Network Ops	
		Window	24/7	

¹Gulf Standard Time, UTC+04. Cairo staff should note that the desk runs on GST and not on local time — see 1.3.

²A P3 raised against a 24/7 service at 02:00 is picked up when the desk opens. Out-of-hours cover exists for restoration, not for convenience.

file-services	Tier 2	FIELD	VALUE	Permission changes never happen from an incident. Raise the access request — 3.2 and KB0003.
		Owner	L. Haddad	
		Group	Infrastructure	
		Window	Working	
corporate-wifi	Tier 3	FIELD	VALUE	Multiple reports in one area are an infrastructure fault, not several endpoint faults. PRB0040021.
		Owner	L. Haddad	
		Group	Network Ops	
		Window	Working	
endpoint	Tier 3	FIELD	VALUE	Post-update degradation is expected for 24 hours. Do not act inside that window — KB0007.
		Owner	D. Halim	
		Group	Endpoint Eng	
		Window	Working	
print-services	Tier 4	FIELD	VALUE	Mechanical faults are a facilities matter and are outside the knowledge base. KB0004 covers queues only.
		Owner	O. Sabry	
		Group	Print Services	
		Window	Working	

5.3 Criticality definitions

TIER	MEANING	CONSEQUENCES
Tier 1	Revenue-bearing, or underpins every other service.	Impact 1 by default. Emergency change route available. Service owner joins every P1 and P2 bridge.
Tier 2	Enterprise-wide productivity.	Impact 1 when the whole service is down, Impact 2 when a department is affected.
Tier 3	Departmental or site-level productivity.	Impact 2 at most, unless a site is entirely without the service.
Tier 4	Convenience. A documented manual workaround exists.	Impact 3 unless several teams are blocked simultaneously.

6. Knowledge base articles

Nine published articles and one retired revision, reproduced as at edition 4.0. The knowledge base is authoritative; this section is a snapshot for offline and audit use.

6.1 Article index

The table below crosses two pages. It is the fastest route from a reported symptom to an article number, and it is the one part of this section worth skimming end to end.

ARTICLE	REPORTED AS	SERVICE	CATEGORY	OWNER
KB0001	"VPN says authentication failed since my password reset"	corporate-vpn	network	Network Ops
KB0002	"Outlook is Disconnected and no mail is arriving"	corporate-email	software	Collaboration
KB0003	"My mapped drive has disappeared since I logged in"	file-services	network	Infrastructure
KB0004	"Jobs queue up and nothing comes out of the printer"	print-services	hardware	Print Services
KB0005	"I am locked out and nothing lets me sign in"	identity	inquiry	Identity & Access
KB0006	"I changed my phone and MFA no longer works"	identity	inquiry	Identity & Access
KB0007	"My laptop has been slow since the update"	endpoint	hardware	Endpoint Eng
KB0008	"SAP times out with RFC_ERROR_COMMUNICATION"	sap-erp	software	SAP Basis
KB0009	"Wi-Fi keeps dropping on the 5 GHz network"	corporate-wifi	network	Network Ops
KB0010 v2	"Order service is returning 500s under load"	order-processing	software	Platform Eng
KB0010 v1	<i>Retired 02 Apr 2026 — do not apply. See 6.12.</i>	order-processing	software	Platform Eng

6.2 Symptom finder

Where the reported words do not match an article title, work from the pattern instead.

Started after a change

A password reset, a phone replacement, a Windows update or a new starter's first login. Check KB0001, KB0005, KB0006 and KB0007 before anything else.

Several services at once


Almost always identity, not the services themselves. Go to KB0005 first and confirm the account state before troubleshooting any individual application.

Only in one place

A location-bound fault is infrastructure. KB0009 for wireless; otherwise raise to Network Operations with the location and the times.

6.3 KB0005 — the archived scan

Articles predating the 2025 migration exist as scans of the printed originals, signed off by the reviewer of the day. The scan is retained for audit; the published text in 6.8 is what you follow.

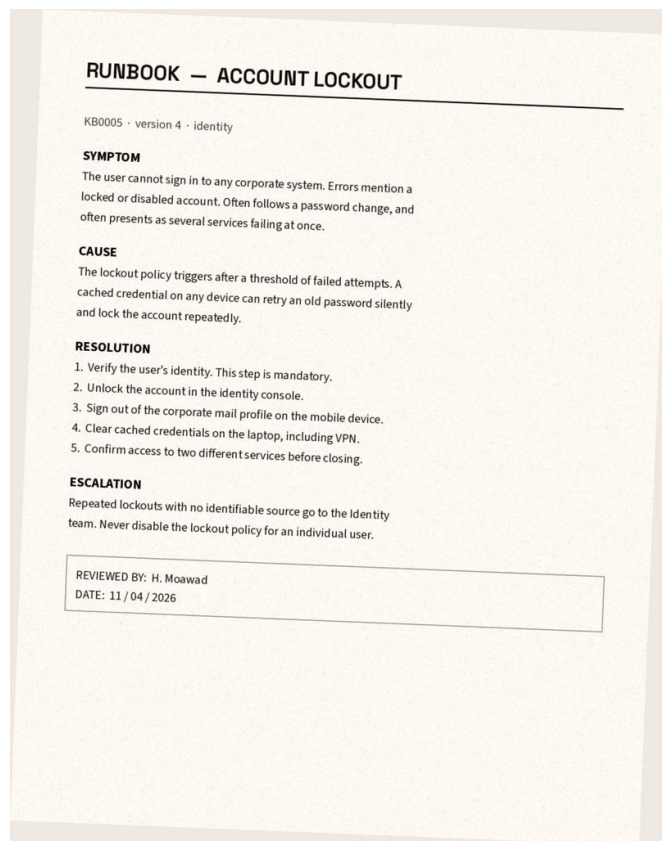

KB0005 as it existed before the 2025 migration. Retained for audit only — the current text is in 6.8.

6.4 KB0001 — VPN authentication fails after a password change

KB0001	VPN AUTHENTICATION FAILS AFTER A PASSWORD CHANGE		
State	Published	Version	2
Service	corporate-vpn	Category	network
Owner	Network Operations	Author	L. Haddad
Reviewed	11 Apr 2026	Uses, 12 mo	1,284 · Related PRB0040012, INC0010023

Symptom. The user can reach the internet but the VPN client reports an authentication failure. It began after a password reset. The client may report “invalid credentials” even when the new password is entered correctly.

Cause. The VPN client caches the previous credential in the operating system credential store. The cached entry is presented before the newly typed password, so the directory rejects it. Repeated attempts can lock the account (see KB0005).

Resolution.

1. Confirm with the user that they changed their password within the last 24 hours.
2. Ask the user to sign out of the VPN client completely, including the system tray icon.
3. Clear the cached credential for the VPN profile from the credential store.

4. Reconnect using the new password.
5. If authentication still fails, check whether the account is locked in the identity console before escalating.

Escalation. If the account is not locked and the new password works elsewhere, escalate to the Network team with the client log.

6.5 KB0002 — Outlook shows Disconnected and no mail is delivered

KB0002	OUTLOOK SHOWS DISCONNECTED AND NO MAIL IS DELIVERED		
State	Published	Version	3
Service	corporate-email	Category	software
Owner	Collaboration Services	Author	O. Sabry
Reviewed	02 Feb 2026	Uses, 12 mo	947 · Related INC0010024

Symptom. The mail client displays Disconnected or Trying to connect. No new mail arrives. Webmail may still work, or may not.

Cause. Two distinct causes present identically: a single-user profile or cached-mode corruption, and a service-wide mail outage. Distinguishing them is the first step, not an afterthought.

Resolution.

1. Ask whether colleagues are affected. If more than one user in the same area is affected, treat it as a service event and stop; do not apply per-user fixes to a platform outage.
2. Check whether webmail works for this user. If webmail works, the fault is client-side.
3. For a client-side fault, close the client fully and reopen it.
4. If it still fails, recreate the mail profile and allow the cache to rebuild.
5. Confirm mail flow before closing.

Escalation. If multiple users are affected, raise a major incident against the corporate-email service. Do not resolve individual incidents until the service event is closed.

6.6 KB0003 — Mapped shared drive is missing after sign-in

KB0003	MAPPED SHARED DRIVE IS MISSING AFTER SIGN-IN		
State	Published	Version	2
Service	file-services	Category	network
Owner	Infrastructure	Author	L. Haddad
Reviewed	19 Jan 2026	Uses, 12 mo	612 · Related INC0010025

Symptom. A previously available network drive letter is absent after signing in. Other drives may still be present. Browsing to the server path directly may work.

Cause. The mapping script runs before the network is ready, or the user has been removed from the group that grants access to the share. These require different fixes, so establish which one applies before acting.

Resolution.

1. Ask the user to browse to the server path directly. If it opens, the share and the permissions are fine and the fault is in the mapping.

2. If the path opens, re-run the mapping script, or remap the drive with reconnect-at-sign-in enabled.
3. If the path is refused, check the user's group membership against the share's access group.
4. If group membership is missing, raise an access request. Do not modify group membership from this incident.
5. Confirm the drive is present after a fresh sign-in before closing.

Escalation. Permission changes go through the access request process and are never applied directly from an incident.

6.7 KB0004 — Print jobs queue but nothing prints

KB0004	PRINT JOBS QUEUE BUT NOTHING PRINTS		
State	Published	Version	1
Service	print-services	Category	hardware
Owner	Print Services	Author	O. Sabry
Reviewed	06 Oct 2025	Uses, 12 mo	1,530 · Related INC0010026, INC0010047

Symptom. Documents accumulate in the print queue. The printer shows ready and reports no error. Cancelling a job leaves it stuck as Deleting.

Cause. The local print spooler service has stalled, leaving orphaned job files that block the queue.

Resolution.

1. Confirm the printer is online and shows no physical error, and that paper and toner are present.
2. Stop the print spooler service on the affected machine.
3. Delete the queued job files from the spooler directory.
4. Start the print spooler service again.
5. Print a test page and confirm it completes.

Escalation. If the queue stalls again within an hour, or several users on the same printer are affected, escalate to Print Services — the fault is likely on the print server rather than the client.

6.8 KB0005 — Account is locked after repeated failed sign-ins

KB0005	ACCOUNT IS LOCKED AFTER REPEATED FAILED SIGN-INS		
State	Published	Version	4
Service	identity	Category	inquiry
Owner	Identity & Access	Author	H. Moawad
Reviewed	11 Apr 2026	Uses, 12 mo	2,109 · Related PRB0040012, INC0010027

Symptom. The user cannot sign in to any corporate system. Errors mention a locked or disabled account. Often follows a password change, and often presents as several services failing at once.

Cause. The lockout policy triggers after a threshold of failed attempts. A cached credential on any device — a phone mail profile, a VPN client, a mapped drive — can retry an old password silently and lock the account repeatedly, including immediately after each unlock.

Resolution.

1. Verify the user's identity following the identity verification procedure. This step is mandatory and is never skipped.
2. Unlock the account in the identity console.

3. Ask the user to sign out of the corporate mail profile on their mobile device, which is the most common source of a silent retry.
4. Clear cached credentials on the laptop, including VPN and mapped drives.
5. Ask the user to sign in again and confirm access to two different services.
6. If the account locks again within minutes, a device is still retrying an old credential; identify it from the lockout source before unlocking a third time.

Escalation. Repeated lockouts with no identifiable source go to the Identity team. Never disable the lockout policy for an individual user.

6.9 KB0006 — Multi-factor authentication after a lost or replaced device

KB0006	MULTI-FACTOR AUTHENTICATION AFTER A LOST OR REPLACED DEVICE		
State	Published	Version	3
Service	identity	Category	inquiry
Owner	Identity & Access	Author	H. Moawad
Reviewed	11 Apr 2026	Uses, 12 mo	438 · Related RITM0010877, INC0010028

Symptom. The user has a new phone, or has lost the previous one, and can no longer approve sign-in prompts or generate codes.

Cause. The authenticator registration is bound to the previous device and does not transfer with a phone migration.

Resolution.

1. Verify the user's identity following the enhanced verification procedure for MFA resets. This is stricter than standard verification and must not be shortened.
2. Confirm whether the previous device is lost or simply replaced. A lost device requires the registration to be revoked, not just re-enrolled.
3. Raise the MFA reset request through the identity workflow. It requires approval; a service desk agent cannot complete it alone.
4. Once approved, guide the user through enrolling the new device.
5. Confirm a successful sign-in with the new factor before closing.

Escalation. An MFA reset is a high-risk identity action. It always requires the approval step, and any suspicion of compromise goes to Security immediately.

6.10 KB0007 — Laptop performance degrades after a system update

KB0007	LAPTOP PERFORMANCE DEGRADES AFTER A SYSTEM UPDATE		
State	Published	Version	2
Service	endpoint	Category	hardware
Owner	Endpoint Engineering	Author	D. Halim
Reviewed	19 Jan 2026	Uses, 12 mo	776 · Related INC0010029

Symptom. The machine is noticeably slower after an update. Fans run constantly, applications are slow to launch, and the problem persists across restarts.

Cause. Post-update indexing and driver reinstallation run at high priority for a period after installation. If the degradation persists beyond that period, a driver mismatch is the usual cause.

Resolution.

1. Ask when the update was installed. Within 24 hours, background indexing is expected — tell the user and check back rather than making changes.
2. Check resource usage and identify the dominant process.
3. If indexing dominates, allow it to complete and confirm with the user the following day.
4. If a graphics or storage driver dominates, reinstall the vendor driver for the installed operating system build.
5. Restart and confirm the machine returns to normal responsiveness.

Escalation. If performance is still degraded 48 hours after the update with no dominant process, escalate to Endpoint Engineering with a performance capture.

6.11 KB0008 — SAP GUI connection times out with RFC_ERROR_COMMUNICATION

KB0008	SAP GUI CONNECTION TIMES OUT WITH RFC_ERROR_COMMUNICATION		
State	Published	Version	1
Service	sap-erp	Category	software
Owner	SAP Basis	Author	K. Selim
Reviewed	06 Oct 2025	Uses, 12 mo	203 · Related KE0000034, INC0010031

Symptom. The SAP GUI client fails to connect and reports RFC_ERROR_COMMUNICATION or a connection timeout. Other applications work normally.

Cause. The client cannot reach the message server on the required port. Most often the user is off the corporate network without the VPN, or the saved connection entry points at a decommissioned application server.

Resolution.

1. Confirm the user is on the corporate network or connected to the VPN. SAP is not reachable from the internet.
2. Check the saved connection entry against the current published connection details.
3. If the entry names a specific application server, change it to the message server and group so that load balancing applies.
4. Reconnect and confirm sign-in reaches the logon screen.
5. If the timeout persists from a known-good network, check whether the message server is reachable on its port before escalating.

Escalation. A confirmed reachability failure from the corporate network goes to the SAP Basis team with the exact error text and the connection entry used.

6.12 KB0009 — Wi-Fi drops repeatedly on the 5 GHz corporate network

KB0009	WI-FI DROPS REPEATEDLY ON THE 5 GHZ CORPORATE NETWORK		
State	Published	Version	2
Service	corporate-wifi	Category	network
Owner	Network Operations	Author	L. Haddad
Reviewed	02 Feb 2026	Uses, 12 mo	1,041 · Related PRB0040021, INC0010033

Symptom. The connection drops every few minutes and reconnects on its own. It is worse in some parts of the building and while moving between areas.

Cause. Aggressive roaming behaviour between access points, or a power-saving setting on the wireless adapter that suspends the radio during idle periods.

Resolution.

1. Establish whether drops occur in one location or while moving. Drops only while moving indicate roaming; drops while stationary indicate the adapter.
2. For a stationary user, disable power saving on the wireless adapter.
3. Update the wireless adapter driver to the current supported version.
4. Ask the user to forget and rejoin the corporate network so the profile is rebuilt.
5. Confirm a stable connection for at least fifteen minutes before closing.

Escalation. Drops affecting several users in the same area are an infrastructure fault. Escalate to Network with the location and the approximate times.

6.13 KB0010 — Order service connection pool exhaustion

This article exists in two revisions and both are reproduced, because the retired one is still quoted from memory and its procedure is now harmful.

Version 1 — retired 02 April 2026

KB0010	ORDER SERVICE CONNECTION POOL EXHAUSTION - **RETIRED**		
State	Retired	Version	1
Retired on	02 Apr 2026	Reason	Step 1 caused a 40-minute outage on 14 Mar 2026. See MIR-2026-03.

Symptom. The order service returns HTTP 500 and logs report that the database connection pool is exhausted.

Cause. Connections are not being returned to the pool under load.

Resolution.

1. Restart the order service application server to clear the pool.
2. Confirm the service returns 200 and monitor for recurrence.

Escalation. If it recurs within the hour, escalate to Platform Engineering.

Why this revision is dangerous, not merely outdated

The restart in step 1 dropped in-flight orders and caused the outage recorded in MIR-2026-03. The procedure is well written and reads convincingly, which is exactly why it kept being applied after the fault it addresses had changed. If you find this text anywhere — a saved copy, a wiki page, a team chat pin — replace it with the link to version 2 and tell the knowledge manager where you found it.

Version 2 — published 02 April 2026

KB0010	ORDER SERVICE CONNECTION POOL EXHAUSTION		
State	Published	Version	2
Service	order-processing	Owner	Platform Engineering · K. Selim
Reviewed	02 Apr 2026	Related	MIR-2026-03, PRB0040018, CHG0030455, INC0010052

Symptom. The order service returns HTTP 500 under load. Application logs report that the database connection pool is exhausted and that connection acquisition timed out.

Cause. Connections are held beyond their intended lifetime by a long-running query path and are not returned to the pool, so new requests wait and then fail.

Resolution.

1. **Do not restart the application server.** A restart drops in-flight orders and caused a 40-minute outage on 14 March 2026.
2. Confirm pool saturation from the service metrics dashboard rather than from the error message alone.
3. Notify the Order Processing service owner. This service has a change-controlled remediation path.
4. Raise an emergency change against CHG0030455 for the pool drain procedure, which recycles connections without dropping in-flight work.
5. Apply the drain procedure only once the change is approved.
6. Monitor pool utilisation for thirty minutes after the drain.

Escalation. Any incident on `order-processing` at Priority 1 goes to the service owner immediately and is never remediated from the service desk alone.

7. Worked incident records

Four closed incidents, reproduced with their journals intact. They are here because they are ordinary, not because they are interesting — they show what a well-handled ticket looks like when nothing dramatic happens.

7.1 What the record looks like

The form below is a live incident mid-flight. Every field an analyst is expected to maintain is visible on it, and the fields written by the AI Suggested Response pilot are grouped in the middle band — see Section 11 for what they mean and how far to trust them.

Incident INC0010023

ServiceNow

Save

Resolve

Delete

Number	INC0010023	Caller	Mariam Fouad
Category	Network	Subcategory	VPN
Business service	corporate-vpn	State	In Progress
Impact	3 - Low	Urgency	2 - Medium
Priority	3 - Moderate	Assignment group	Service Desk Tier 1

Short description

Cannot connect to VPN since password reset this morning

AI Status

suggested

AI Confidence

0.79

Human Review Required

true

AI Suggested Response

1. Confirm with the user that they changed their password within the last 24 hours.
2. Ask the user to sign out of the VPN client completely, including the tray icon.
3. Clear the cached credential for the VPN profile.
4. Reconnect using the new password.

Source: KB0001 - VPN authentication fails after a password change (v2).

INC0010023 with a drafted suggestion awaiting review. Human Review Required is set; nothing has been sent to the requester.

7.2 INC0010023 — VPN authentication failure after a password reset

Number	INC0010023	Opened	08 Sep 2026 09:14 GST
Caller	Mariam Fouad, Finance	Channel	Self-service portal
Category	Network · VPN	Service	corporate-vpn
Impact / Urgency	3 – Individual / 2 – Medium	Priority	P3 – Moderate
Assignment group	Service Desk Tier 1	Assignee	O. Sabry
Article applied	KB0001 v2	Closed	08 Sep 2026 10:02 GST
Resolution code	Resolved by knowledge article	Breach	None · 48 min against a 3-day target

TIME	TYPE	ENTRY
09:14	System	Incident created from the portal. Category set by requester to Network.
09:14	System	AI Suggested Response drafted. Confidence 0.79. Source KB0001 v2, section Resolution. Human Review Required set.
09:21	Work note	Picked up. Read the drafted suggestion; it matches the reported symptom. Confirmed with the caller by phone that the password was reset this morning.

TIME	TYPE	ENTRY
09:26	Work note	Applied KB0001 v2. Caller signed out of the VPN client including the tray icon, cleared the cached credential for the profile.
09:34	Comment	Hello Mariam — please try connecting again now with your new password and let me know how you get on.
09:48	Work note	Caller reports the connection now succeeds. Asked her to reconnect a second time to confirm the cached credential did not return.
09:57	Work note	Second connection successful. Checked the account is not locked in the identity console — it is not, so no follow-on to KB0005 needed.
10:02	Comment	Glad that worked. I have resolved this. If it recurs after your next password change, reopen this ticket and quote KB0001.

Why this one is worth reading twice

The analyst read the drafted suggestion, verified the premise with the caller before applying it, and then checked the adjacent failure mode — a locked account — before closing. The whole thing took 48 minutes against a three-day target, and the journal is legible to someone who was not there.

7.3 INC0010047 — a fault with no article behind it

Number	INC0010047	Opened	08 Sep 2026 11:32 GST
Caller	Facilities — meeting room 4	Channel	Telephone
Category	Hardware · Printer	Service	print-services
Impact / Urgency	3 – Individual / 3 – Low	Priority	P4 – Low
Assignment group	Service Desk Tier 1 → Facilities	Assignee	Facilities duty manager
Article applied	None — no relevant article	Closed	09 Sep 2026 14:20 GST
Resolution code	Referred to Facilities	Breach	None

TIME	TYPE	ENTRY
11:32	System	Incident created from a telephone call.
11:33	System	AI Suggested Response: no matching knowledge article found. Best match KB0004 scored 0.31 against a threshold of 0.55. No resolution drafted. Flagged for human review.
11:40	Work note	Grinding noise on paper feed. This is a mechanical fault, not a queue fault, so KB0004 does not apply — the pilot was right to decline.
11:44	Work note	Checked with the caller that jobs are not merely queued. The device makes the noise with the queue empty.
11:51	Comment	Thanks for reporting this. The noise you describe is a mechanical fault on the device itself, which Facilities handle rather than IT. I have passed it to them with your details.
11:52	Work note	Referred to Facilities duty manager. Advised the room be marked out of use for printing until inspected.

TIME	TYPE	ENTRY
14:20	Work note	Facilities confirm the feed roller has been replaced. Caller confirms normal printing. Closed.

This is the intended outcome when the knowledge base holds nothing relevant. The pilot declined to draft rather than producing a plausible printer procedure, the analyst confirmed the distinction between a mechanical fault and a queue fault, and the incident left IT within twenty minutes.

7.4 INC0010064 — three symptoms, one cause

Number	INC0010064	Opened	09 Sep 2026 08:04 GST
Caller	Ahmed Zaki, Procurement	Channel	Telephone
Category	Inquiry → Identity	Service	identity
Impact / Urgency	3 – Individual / 1 – High	Priority	P2 – High
Assignment group	Service Desk Tier 1	Assignee	O. Sabry
Article applied	KB0005 v4	Closed	09 Sep 2026 09:11 GST
Resolution code	Resolved by knowledge article	Related	PRB0040012

TIME	TYPE	ENTRY
08:04	Work note	Caller reports no email, shared drive gone, and Teams repeatedly asking him to sign in. Three services, one morning.
08:06	System	AI Suggested Response: three distinct symptoms detected across three services, no single article covers all three. No resolution drafted. Flagged for human review.
08:09	Work note	Simultaneous failures across email, file shares and collaboration is the KB0005 pattern, not three separate faults. Checked the identity console: account locked at 07:52.
08:14	Work note	Verified identity per procedure. Unlocked the account.
08:16	Work note	Account locked again within two minutes. A device is retrying an old credential. Lockout source shows the mobile mail profile.
08:31	Work note	Caller signed out of the corporate mail profile on his phone and re-entered the new password. Cleared cached credentials on the laptop including VPN.
08:44	Work note	Unlocked a second time. No further lockouts after 15 minutes of observation.
09:05	Work note	Confirmed access to email and the shared drive. Third lockout in six weeks for this caller — linked to PRB0040012.
09:11	Comment	All three problems had the same cause: your account had locked, which blocks everything at once. It is unlocked and your phone is no longer retrying the old password.

“Simultaneous failures across unrelated services are almost never several faults. They are one fault, one layer down.”

7.5 INC0010052 — escalated without being touched

Number	INC0010052	Opened	08 Sep 2026 15:47 GST
Caller	Monitoring — order-processing	Channel	Alert
Category	Software · Application	Service	order-processing
Impact / Urgency	1 – Enterprise / 1 – High	Priority	P1 – Critical
Assignment group	Platform Engineering	Assignee	K. Selim
Article applied	KB0010 v2	Related	PRB0040018, CHG0030455
Resolution code	Resolved by change	Breach	None · 2h 41m against a 4-hour target

TIME	TYPE	ENTRY
15:47	System	Incident raised from a monitoring alert. Pool saturation on order-processing. Priority derived P1 from Tier 1 criticality and alert severity.
15:47	System	AI Suggested Response: risk assessed as high before retrieval — Priority 1 on a Tier 1 service. No action taken. Escalated for human decision with the evidence attached.
15:49	Work note	Major incident bridge opened. Service owner paged.
15:52	Work note	Pool saturation confirmed on the metrics dashboard, not from the error text alone. Matches KB0010 v2 symptom exactly.
15:58	Work note	Restart explicitly ruled out per KB0010 v2 step 1 and MIR-2026-03. Raising emergency change against CHG0030455 for the drain procedure.
16:24	Work note	Emergency change approved by change manager and service owner. Approval record attached — see 10.4.
16:41	Work note	Drain procedure applied. Pool utilisation falling. No orders dropped.
17:15	Work note	Thirty minutes of stable utilisation observed. Bridge stood down.
18:28	Work note	Resolved. Linked to PRB0040018, which remains open pending the permanent fix.

8. Problems and known errors

8.1 The difference, and why it matters at the desk

A problem is the underlying cause of one or more incidents. A known error is a problem whose cause is understood and whose workaround is documented, but whose permanent fix has not yet shipped. The desk cares about the distinction for one reason: a known error has a workaround you may apply today, and a problem does not.

	PROBLEM	KNOWN ERROR
Cause	Under investigation	Understood and recorded
Workaround	May not exist	Documented, and safe to apply
At the desk	Link the incident and escalate normally	Apply the workaround, link the incident, do not escalate

8.2 Open problem register

PROBLEM	DESCRIPTION	RAISED	INCIDENTS	OWNER AND STATUS
PRB0040012	Repeat account lockouts traced to cached credentials on mobile mail profiles. Affects roughly forty users a month, concentrated after the quarterly password rotation.	12 Feb 2026	63	Identity & Access. Awaiting the modern-auth rollout, Q4.
PRB0040018	Connection pool exhaustion on order-processing under sustained load. Root cause is a long-running query path holding connections beyond their lifetime.	15 Mar 2026	9	Platform Engineering. Fix in test; target Q4.
PRB0040021	Wireless drops on the 5 GHz corporate SSID while roaming between access points on floors 3 and 4.	08 Jan 2026	41	Network Operations. Controller firmware scheduled, CHG0030588.
PRB0040026	Post-update endpoint degradation persisting beyond the expected 24-hour indexing window on a specific laptop model.	22 Jun 2026	17	Endpoint Engineering. Vendor case open.
PRB0040029	Print queues stalling on the third-floor device within an hour of a spooler restart.	30 Jul 2026	12	Print Services. Under investigation.

8.3 Known error register

Every entry here has a workaround you may apply without escalating. Link the incident to the known error so the count stays accurate — the counts are what fund the permanent fixes.

KNOWN ERROR	SYMPTOM	WORKAROUND	PERMANENT FIX
KE0000034	SAP GUI times out with RFC_ERROR_COMMUNICATION from a known-good network.	The saved connection entry names a decommissioned application server. Change it to the message server and group. KB0008 step 3.	Connection profiles republished by SAP Basis. No date.
KE0000041	Mapped drive absent at sign-in although the server path opens when browsed directly.	Re-run the mapping script, or remap with reconnect-at-sign-in enabled. KB0003 step 2.	Login script rewrite, CHG0030602.
KE0000047	Account re-locks within minutes of an unlock, with no user action.	Identify the lockout source before the second unlock. Sign the mobile mail profile out first. KB0005 steps 3 and 6.	Modern-auth rollout under PRB0040012.
KE0000052	Wireless drops while walking between floors 3 and 4.	None for roaming users. For stationary users, disable adapter power saving. KB0009 step 2.	Controller firmware, CHG0030588.
KE0000055	Print queue stalls again within an hour of a spooler restart on the third-floor device.	Restart the queue on the print server rather than the client. Escalate on the second recurrence in a day.	Under investigation, PRB0040029.

9. Major incident report MIR-2026-03

Order processing unavailable, 14 March 2026, 40 minutes. Published 27 March 2026. This report is reproduced in full because three of its actions changed procedures that appear elsewhere in this manual.

9.1 Summary

Report	MIR-2026-03	Declared	14 Mar 2026 13:12 GST
Service	order-processing · Tier 1	Restored	14 Mar 2026 13:52 GST
Duration	40 minutes, full unavailability	Incident	INC0009884
Incident manager	N. Abdelrahman	Service owner	K. Selim
Orders affected	312 in flight, 47 unrecoverable	Classification	Self-inflicted · procedural
Report author	D. Halim, Problem Manager	Signed off	27 Mar 2026, K. Selim

9.2 What happened

The trigger. At 12:58 the order service began returning HTTP 500 under normal midday load. Connection pool saturation was reported in the application log within a minute, and monitoring raised INC0009884 at 13:02 as a P1.

The response. The analyst on the bridge searched the knowledge base, found KB0010, and applied it. Step 1 of that article, as it stood, instructed a restart of the application server.

The consequence. The restart cleared the pool as documented and simultaneously dropped every in-flight order. The service returned 200 within ninety seconds, so the restart looked successful on every signal the bridge was watching.

The discovery. Fulfilment noticed missing orders at 13:31. The bridge was reconvened, the gap was quantified at 47 unrecoverable orders, and manual recovery began.

Restoration. The service itself was never unavailable after 13:04. The forty minutes recorded above is the window in which orders were being accepted and lost, which is the number that matters commercially and the one this report uses.

The article was not wrong when it was written. KB0010 v1 was published in 2023 against an earlier deployment where the service drained gracefully on shutdown. That behaviour changed with the 2025 platform migration and the article was never revisited.


9.3 Timeline

TIME	ACTOR	EVENT
12:58	System	Order service begins returning HTTP 500 under load.
12:59	System	Pool saturation logged. Alert raised.
13:02	Monitoring	INC0009884 created. P1 derived from Tier 1 criticality.
13:04	Tier 1	Bridge opened. Service owner paged.
13:07	Tier 1	KB0010 located and read. Step 1 applied — application server restarted.
13:09	System	Service returns 200. Pool utilisation normal. Bridge stands down.

TIME	ACTOR	EVENT
13:12	Incident mgr	Major incident declared retrospectively for the pool event.
13:31	Fulfilment	Missing orders reported. Bridge reconvened.
13:44	Platform Eng	Gap quantified: 312 in flight at restart, 47 unrecoverable.
13:52	Incident mgr	Manual recovery complete for the 265 recoverable orders. Service confirmed restored.
14:20	Knowledge	KB0010 v1 set to retired pending revision.
16:00	Change	CHG0030455 raised for a drain procedure that does not drop in-flight work.

9.4 The bridge whiteboard

The photograph below was taken in the Dubai operations room at 13:40, while the recovery was being scoped. It is included because the two boxed items on it became actions 1 and 4 below, and because it records the reasoning as it was at the time rather than as it was reconstructed afterwards.

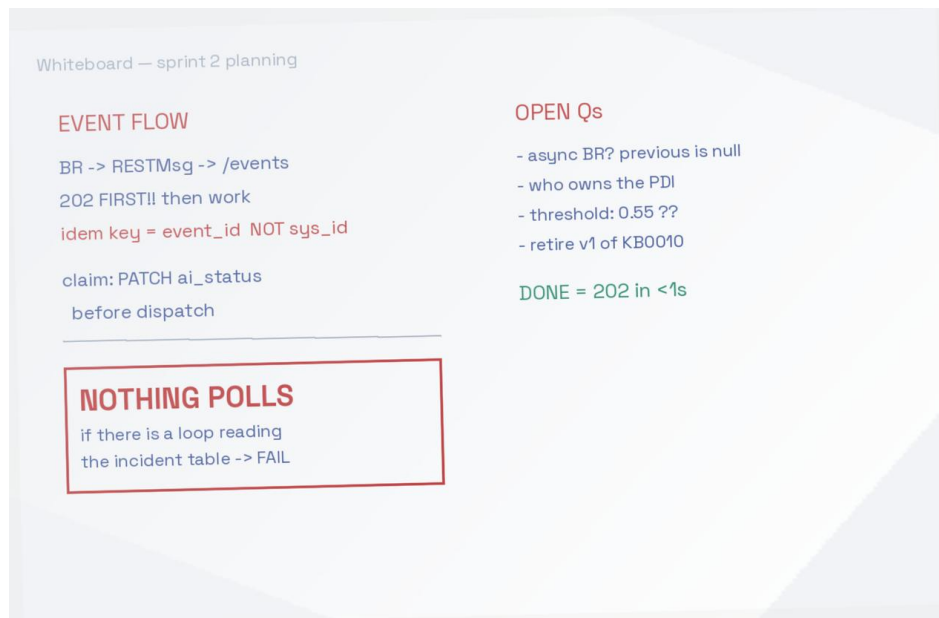

The operations room whiteboard at 13:40 on 14 March. The boxed rule at the foot became action 4.

9.5 Root cause

- 1. Immediate cause.** A restart of the order service application server dropped in-flight orders.
- 2. Contributing cause.** The knowledge article instructing that restart was correct for a deployment that no longer existed, and had not been reviewed since the 2025 migration.
- 3. Contributing cause.** No review was triggered by the migration itself. Articles are reviewed on a calendar cycle, and the migration changed behaviour that several articles depended on.
- 4. Contributing cause.** The bridge's success signals — HTTP 200 and normal pool utilisation — did not include order continuity, so the loss was invisible for 22 minutes.

“The article was well written, correct when published, and dangerous by the time it was applied. That is the ordinary shape of this failure, not an unusual one.”

9.6 Actions

#	ACTION	OWNER	DUE	STATUS
1	Revise KB0010. Version 1 retired, version 2 published with the restart explicitly ruled out and a change-controlled drain path substituted.	H. Moawad	02 Apr 2026	Closed
2	Build and test the pool drain procedure that recycles connections without dropping in-flight work. Register it as a pre-approved emergency change.	K. Selim	02 Apr 2026	Closed
3	Raise PRB0040018 for the underlying connection-lifetime defect and track the permanent fix separately from the workaround.	D. Halim	20 Mar 2026	Closed
4	Add a migration-triggered review to the knowledge lifecycle: any platform migration triggers a review of every article naming the affected service, regardless of the calendar cycle.	H. Moawad	30 Apr 2026	Closed
5	Add order continuity to the P1 restoration checklist for order-processing, so that a service returning 200 is not by itself treated as restored.	N. Abdelrahman	30 Apr 2026	Closed
6	Search the estate for saved copies of KB0010 v1 outside the knowledge base — wikis, chat pins, personal notes — and replace them.	O. Sabry	31 May 2026	Open

Action 6 is still open, and it is the one that matters

Every other action changed a system. Action 6 is about the copies people kept, and there is no reliable way to close it. If you find KB0010 v1 anywhere — a saved PDF, a pinned message, a page in a team wiki — replace it with a link to version 2 and tell the knowledge manager where it was.

10. Change management

10.1 What the desk needs to know

Most of change management happens elsewhere. Three parts of it reach the desk: recognising when a fix requires a change rather than an incident action, holding an incident correctly against a change window, and knowing which changes are pre-approved so you do not wait for an approval that is not needed.

TYPE	USE WHEN	APPROVAL	LEAD TIME
Standard	The change is pre-approved and its procedure is documented and unchanged.	None required	None — proceed
Normal	Planned work with an assessable risk and a rollback.	CAB, weekly	5 working days
Emergency	Required to restore or protect a Tier 1 or Tier 2 service now.	Change manager and service owner, both	Immediate
Latent	A change already applied under emergency conditions, recorded afterwards.	Retrospective, at the next CAB	Within 2 working days

10.2 Pre-approved standard changes

CHANGE	PROCEDURE	WHO MAY APPLY IT	RECORDS TO LINK
CHG0030401	Print spooler restart and queue clear on a client workstation. KB0004.	Tier 1 analyst	The incident
CHG0030418	Cached credential clear for the VPN profile. KB0001.	Tier 1 analyst	The incident
CHG0030422	Account unlock following identity verification. KB0005.	Tier 1 analyst, IAM	The incident, PRB0040012
CHG0030455	Order service pool drain. Recycles connections without dropping in-flight work. KB0010 v2.	Platform Engineering only , after emergency approval	The incident, PRB0040018
CHG0030470	Wireless adapter driver update on a single endpoint. KB0009.	Endpoint Engineering	The incident, PRB0040021

CHG0030455 is pre-approved as a procedure, not as an action

The drain procedure itself needs no re-assessment — that is what pre-approval buys. Executing it against a live Tier 1 service still requires the change manager and the service owner to approve, on the record, before it runs. Pre-approval removes the design review, not the authorisation.

10.3 Emergency approval

1. The engineer proposing the action states the service, the procedure, the expected effect and the rollback, in the incident journal.

2. The change manager confirms the procedure matches a documented one and that the rollback is real.
3. The service owner confirms the business impact is acceptable now rather than at the next window.
4. **Both approvals are recorded before the action runs.** An action taken first and approved afterwards is a latent change and is reported as a deviation.
5. The approval record is attached to the incident and referenced in the change.

10.4 Approval record — CHG0030455 against INC0010052

The record below is the one referenced from the journal in 7.5. It is reproduced as the form is completed and stored: the evidence, the risk verdict and the approval on a single sheet.

HIGH-RISK ACTION — APPROVAL RECORD	
Incident	INC0010052
Execution ID	7c1f8a02e4021bd9
Risk level	HIGH
Requested action	propose_resolution
Evidence	KB0010 v2, section Resolution, score 0.88
Approver decision	
☒	Approved
☐	Approved with edits
☐	Rejected
Approver	<u>N. Abdelrahman</u>
Role	<u>Service Delivery Manager</u>
Date	<u>08 / 09 / 2026</u>
Time	<u>09:41</u>



Emergency approval for the pool drain against INC0010052. Recorded at 16:24, seventeen minutes before the procedure ran.

11. The AI Suggested Response pilot

A pilot service that drafts a candidate resolution on eligible incidents, cites the article it came from, and flags the incident for human review. It never resolves, closes or reassigns anything. This section is what the desk needs in order to work alongside it.

11.1 What it does, and what it may not do

When an eligible incident is created, the pilot reads it, searches the published knowledge base, and — if it finds evidence strong enough — writes a numbered procedure into AI Suggested Response together with the article it came from. It then sets Human Review Required and stops. An analyst reads the draft and applies it, edits it or discards it. Nothing reaches the requester unless a person puts it there.

IT MAY	IT MAY NOT
▪ Read an incident and its category ▪ Search published articles only ▪ Write a draft into AI Suggested Response ▪ Write an internal work note ▪ Set Human Review Required and a confidence value ▪ Decline to answer, and say why	▪ Resolve, close or cancel an incident ▪ Reassign it to another group ▪ Write to Additional comments, ever ▪ Email or otherwise contact the requester ▪ Read a draft or retired article ▪ Act on a Priority 1 or a Tier 1 service without approval
These capabilities exist in the service.	These capabilities do not exist in the service. They are absent, not disabled — there is no setting that enables them.

11.2 How a suggestion is produced

The system, end to end

One event in, one grounded suggestion out. Nothing polls; nothing auto-resolves.




The pilot end to end. The teal path is the write-back onto the incident form; a person always stands between the draft and the requester.

Nothing polls the ticketing system. A business rule on the incident table emits an event when an incident becomes eligible, and the pilot responds to that event. If the pilot is unavailable, incidents are created and worked exactly as they were before it existed — the desk is never blocked by it.

One event, one run

The webhook answers first and reasons afterwards. A replay is answered too — and then dropped.

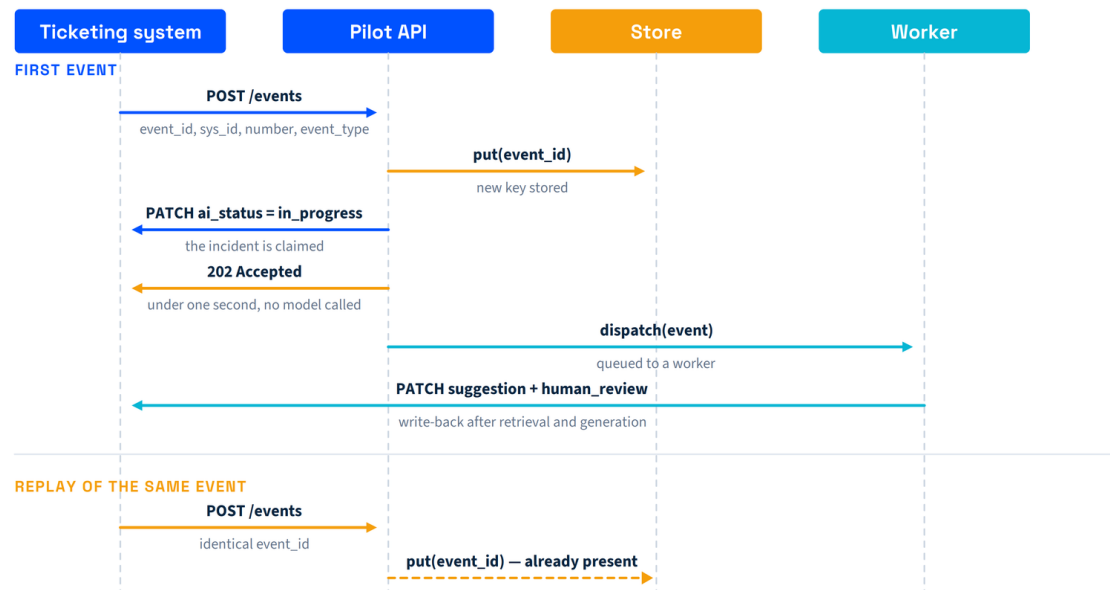

Outcome of the replay

202 Accepted is returned again — the caller must not see an error — but nothing is dispatched and no second suggestion is written.

The event exchange. The pilot acknowledges within a second and reasons afterwards, so a slow answer never delays a form save.

11.3 Eligibility


Not every incident is offered to the pilot. The checks below are applied inside the ticketing system before any event leaves it.

LAYER	CHECK	WHY
Ticketing system	Incident is active	Resolved and closed incidents are finished; nothing the pilot writes improves them.
	Category is in the supported set	The corpus covers network, software, hardware and inquiry. Anything else would produce a refusal at best.
	Not already processed	Prevents the write-back re-triggering the rule that caused it.
	Not an AI-field-only update	Stops an unrelated field change from re-running the pilot.
Pilot service	The event is authentic	Signed. An unsigned event is rejected without being read.
	The event has not been seen before	A retried delivery produces no second suggestion.
	The incident is still eligible on re-read	An incident an analyst has taken over is left alone.
Desk override	AI assistance unticked on the incident	Any analyst may exclude an individual incident. That decision is final and is never overridden.
	The incident is on hold	Something is deliberately waiting. The pilot does not add noise to it.

11.4 Three gates, and what each outcome means to you

The decision ladder

Three gates stand between a retrieved chunk and a written suggestion. Any one of them can stop the run.

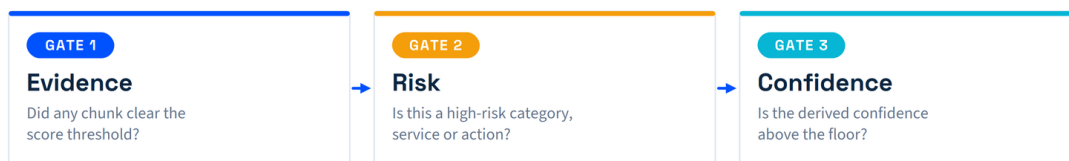

OUTCOMES

● Suggest

All three gates pass. A numbered, cited procedure is written to AI Suggested Response. Human Review Required is set. A service desk agent still approves, edits or rejects it.

● Escalate to a human

Risk is high, or confidence sits below the floor. No draft is written. A work note records the risk verdict and the evidence gathered, and the incident waits for a person.

● Refuse and hand off

No chunk cleared the score threshold, so no fix is drafted. An explicit note says the knowledge base holds nothing relevant. Silence is the correct answer here.

The three gates. A draft is written only when all three pass; otherwise the incident is flagged and left for a person.

OUTCOME	WHAT YOU SEE ON THE FORM	WHAT TO DO
Suggested	A numbered procedure with a cited article. Confidence between 0 and 1.	Read it against the reported symptom before applying it. If it does not match, discard it and say so in the work note — that note is what improves the corpus.
Escalated — no evidence	No draft. A work note naming what was searched and the best score found.	Work the incident normally. The absence of an article is itself useful: if the fault recurs, propose one.
Escalated — high risk	No draft. A work note recording the risk verdict and the evidence that was gathered.	Follow Sections 4 and 10. The pilot has deliberately not acted; it has not failed.
Escalated — low confidence	No draft, or a draft marked below the confidence floor.	Treat as if there were no draft. Do not apply a below-floor draft because it looks plausible.
Failed	AI Status shows failed, with a reason.	Nothing. Work the incident normally and, if it repeats on the same category, raise it with the service owner.


A declined suggestion is a correct outcome, not a fault

The pilot declines on roughly one incident in five. That is the design working: the alternative is a confident printer procedure for a mechanical fault, carrying our citation format and a confidence score. INC0010047 in 7.3 is the reference case.

11.5 Where the drafts come from

The retrieval pipeline

Build time runs once per corpus change. Query time runs once per incident.

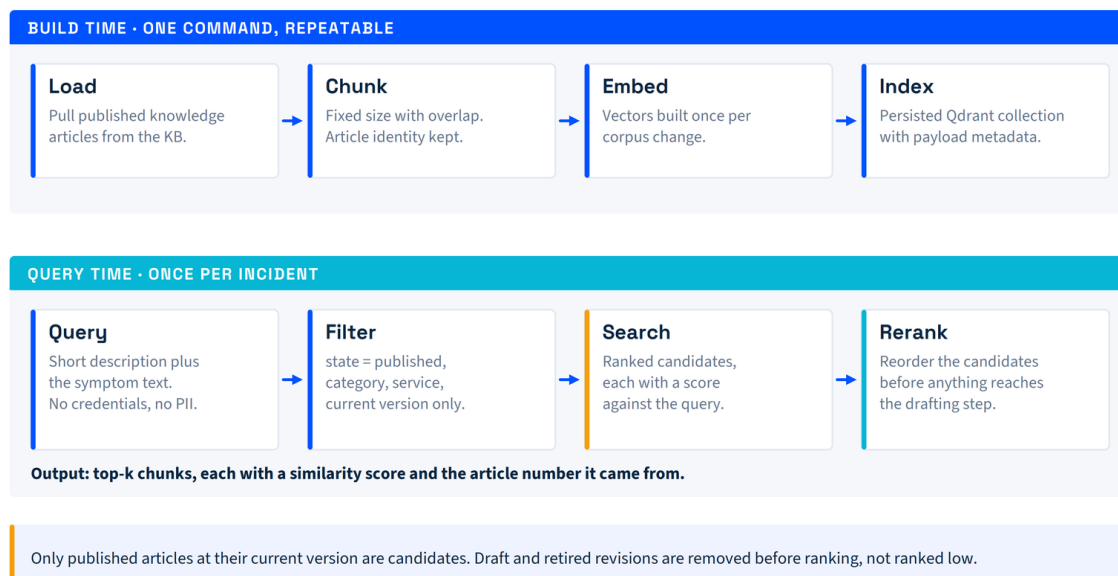

How the knowledge base is indexed and searched. Only published articles at their current version are ever candidates.

The retrieval console shows what the pilot found for a given incident, with the score for each candidate. It is the first place to look when a suggestion is wrong: nine times in ten the draft is a faithful reading of the wrong article, not an invention.

Retrieval results — INC0010023

RANK	ARTICLE	SECTION	SCORE	READING
1	KB0001	Resolution	0.847	Correct article and section.
2	KB0001	Cause	0.812	Same article, adjacent section.
3	KB0005	Symptom	0.694	Plausible neighbour, not wrong.
4	KB0009	Resolution	0.611	Category-adjacent noise.
5	KB0003	Symptom	0.585	Noise.

Threshold 0.55 · top-3 hit: yes · confidence 0.79

Retrieval console output for INC0010023. KB0001 at rank 1 and rank 2, with adjacent articles below the useful line.

Typed out, so the numbers can be quoted in a journal entry:

RANK	ARTICLE	SECTION	SCORE	READING
1	KB0001	Resolution	0.847	Correct article, correct section. This is what a good run looks like.
2	KB0001	Cause	0.812	Same article, adjacent section. Expected and useful.
3	KB0005	Symptom	0.694	Account lockout. A plausible neighbour — password changes cause both.
4	KB0009	Resolution	0.611	Wireless. Category-adjacent noise.
5	KB0003	Symptom	0.585	Shared drive mapping. Noise.

11.6 Safety controls

Two stages of deterministic checks sit around the model. They are code, not instructions, and the model cannot route around them.

STAGE	CHECKS PERFORMED	ENFORCEMENT										
Before	▪ Screening for instructions embedded in the incident text ▪ Credential and key redaction ▪ Personal-data redaction ▪ Length and encoding bounds	Runs before the model is called. A flagged incident is routed to a person and never reaches drafting.										
After	1. Validate the draft against the expected shape 2. Match every step back to a retrieved article 3. Enforce the permitted-action list 4. Scan the text for secrets before writing	Runs after drafting and before the write. A block is logged and escalated — never logged and continued.										
Permitted actions	<table><tr><td>read_incident</td><td>– read</td></tr><tr><td>search_knowledge</td><td>– read</td></tr><tr><td>write_work_note</td><td>– low risk</td></tr><tr><td>flag_human_review</td><td>– low risk</td></tr><tr><td>write_ai_fields</td><td>– low risk</td></tr></table>	read_incident	– read	search_knowledge	– read	write_work_note	– low risk	flag_human_review	– low risk	write_ai_fields	– low risk	Checked at call time. Resolve, close, reassign and contact-requester are not on the list and do not exist in the service.
read_incident	– read											
search_knowledge	– read											
write_work_note	– low risk											
flag_human_review	– low risk											
write_ai_fields	– low risk											

If an incident description contains text addressed to the pilot rather than describing a fault — which has happened twice during the pilot — the screening stage flags it, the incident goes to a person, and the genuine symptom underneath is still worked normally. Report any occurrence to Security Operations as well as to the pilot owner.

11.7 Configuration

The values below are the ones in effect for edition 4.0. They are held in the pilot's configuration file and are changed under normal change control, one at a time, with the effect measured before the next change.

GROUP	VALUES	WHY IT IS SET THIS WAY								
Indexing	<table><tr><th>KEY</th><th>VALUE</th></tr><tr><td>chunk_size</td><td>700</td></tr><tr><td>overlap</td><td>120</td></tr><tr><td>split_on</td><td>heading</td></tr></table>	KEY	VALUE	chunk_size	700	overlap	120	split_on	heading	Splitting on headings keeps Symptom, Cause and Resolution intact. Fixed-width splitting cuts procedures mid-step, and the damage only shows when a draft is missing its second half.
	KEY	VALUE								
	chunk_size	700								
	overlap	120								
split_on	heading									
Search	<table><tr><th>KEY</th><th>VALUE</th></tr><tr><td>top_k</td><td>5</td></tr><tr><td>threshold</td><td>0.55</td></tr><tr><td>published</td><td>true</td></tr></table>	KEY	VALUE	top_k	5	threshold	0.55	published	true	
	KEY	VALUE								
	top_k	5								
threshold	0.55									
published	true									
Safety	<table><tr><th>KEY</th><th>VALUE</th></tr><tr><td>floor</td><td>0.45</td></tr><tr><td>risk_p</td><td>[1]</td></tr><tr><td>retries</td><td>1</td></tr></table>	KEY	VALUE	floor	0.45	risk_p	[1]	retries	1	
	KEY	VALUE								
	floor	0.45								
risk_p	[1]									
retries	1									

Config excerpt (photographed from a laptop screen)

```

retired:
  collection: 10_articles
  chunk_size: 100
  chunk_overlap: 100
  top_k: 5
  score_threshold: 0.55
  published_only: true
  skip_id: false
  entities:
    confidence_floor: 0.45
    high_risk_services: [payments, identity, order-processing]

```

The capture beside this paragraph circulated during the pilot handover and is reproduced because several teams copied their values from it rather than from the file. Two of the numbers in it are now out of date. Read the configuration from the repository, not from a photograph of somebody's screen — a value nobody can diff is a value nobody can review, and the whole point of holding these in one file is that a change to any of them shows up in the change record.

11.8 Reading the run log

Every run is logged. The extract below covers one incident from acceptance to write-back and is the level of detail available when a suggestion needs explaining.

```

worker.log - smartops-worker-1

2026-09-08 09:14:22 INFO webhook event 9f2b1c4e accepted sys_id=1c741bd7 -> 202
2026-09-08 09:14:22 INFO idem claim ok event_id=9f2b1c4e
2026-09-08 09:14:23 INFO snow PATCH incident u_ei_status=in_progress (204)
2026-09-08 09:14:24 INFO retri top_k=5 filter=state:published,category:network
2026-09-08 09:14:24 INFO retri hit#1 KB0001/Resolution score=0.847
2026-09-08 09:14:24 INFO retri hit#2 KB0001/Cause score=0.812
2026-09-08 09:14:24 INFO retri hit#3 KB0005/Symptom score=0.694
2026-09-08 09:14:29 INFO gen prompt_version=v3 tokens_in=1842 tokens_out=214
2026-09-08 09:14:29 WARN gen step 5 not matched to a chunk - dropped
2026-09-08 09:14:30 INFO conf confidence=0.79 threshold=0.55 gate=pass
2026-09-08 09:14:31 INFO snow PATCH suggestion + human_review=true (204)
2026-09-08 09:14:31 ERROR trace langfuse flush timeout after 3000ms - retrying
2026-09-08 09:14:33 INFO trace flush ok trace_id=7c1f8a02e4021bd9
2026-09-08 09:14:33 INFO worker run complete in 11.2s

```

One complete run. The WARN line at 09:14:29 is the evidence check removing a drafted step that matched no article.

11.9 Integration payload

For reference during supplier conversations: the event the ticketing system sends carries identifiers only. No incident text, no requester details and no attachments leave the platform in the event itself — the pilot reads what it is authorised to read, with its own credentials.

Event payload — as pasted into the ticket

```
POST /api/v1/events/servicenow
X-Signature: 4a7f19c2be08d5316f0a2c9d7e41b8a3

{
  "event_id": "9fb1c4e7a5d4f8bb1e3c07d2a6f4e19",
  "sys_id": "1c741bd70b2322007518478d83673af3",
  "number": "INC0010023",
  "event_type": "incident.created",
  "emitted_at": "2026-09-08 09:14:22"
}
```

The event payload, as attached to a supplier ticket during integration testing and reproduced as received.

12. Reporting

12.1 The monthly service review

Held on the second Tuesday. Attended by the service delivery manager, the team leads, the problem manager and any service owner with an open action. The pack is circulated two working days ahead and is not presented in the meeting — the meeting is for the exceptions.

MEASURE	DEFINITION	WHAT IT IS USED FOR
Volume	Incidents created in the period, by priority and by service.	Capacity planning. A rise with no matching change is the first sign of an undiagnosed problem.
First-contact resolution	Resolved by Tier 1 without escalation, as a share of all incidents.	Knowledge coverage. This is the number that moves when Section 6 improves.
SLA attainment	Incidents meeting both response and resolution targets, by priority.	The contractual measure. Reported with the breaches listed individually, never as a percentage alone.
Article usage	Incidents naming an article in the journal, by article.	Which articles earn their place at the next review. An article with no uses in twelve months is a candidate for retirement.
Reopen rate	Incidents reopened within five working days of resolution.	Resolution quality. A rising reopen rate alongside improving SLA attainment means we are closing tickets, not fixing faults.
Pilot acceptance	Drafts applied or edited by an analyst, as a share of drafts written.	Whether the pilot is helping. A draft discarded is not a failure; a draft nobody reads is.

12.2 Reporting to service delivery managers

Service delivery managers at BARQ read their operational reporting in Arabic. The layout below is the agreed one: labels right-aligned in Arabic, and identifiers, scores and article numbers left exactly as they appear in the platform.

SmartOps · Run report		تقرير تشغيل النظام
INC0010023	رقم البلاغ	
مقترح — بانتظار مراجعة بشرية	الحالة	
0.79	درجة الثقة	
KB0001 (v2)	المقال المرجعي	
11.2 ثانية	زمن المعالجة	
تم كتابة الاقتراح في ملاحظات العمل	النتيجة	
ملاحظة: النظام يقترح ولا يغلق البلاغ.		
القرار النهائي لموظف الدعم دائمًا.		

A run report as delivered. Identifiers are never translated or transliterated — they must remain resolvable in the ticketing system.

Never translate an identifier

INC0010023, KB0001 and CHG0030455 are keys, not words. Translating or transliterating one breaks the link between a report and the record it describes, and that link is the only thing that makes a report auditable.

12.3 What is not reported

- **Individual analyst performance.** The pack is service-level. Individual coaching happens between an analyst and their team lead, from data neither of them publishes.
- **Raw journal text.** Journals contain requester details. Extracts quoted in a review are anonymised first.
- **Absolute pilot confidence values across periods.** The value is derived from search scores, and those are not comparable if the underlying model changes. Report the distribution and the acceptance rate instead.

Appendix A · Glossary

TERM	MEANING AT BARQ
Bridge	The conference line opened for a P1 or a multi-service P2. Attendance is the incident manager, the affected service owners and one representative per resolver group. It stays open until the service is restored, not until the cause is understood.
Breach	A response or resolution target missed. Recorded automatically and not editable. A breach with a good reason is still a breach; the reason belongs in the journal.
Clock	The elapsed or working-hours measure against a target. Starts at creation, pauses on hold, stops at resolved.
Criticality	The tier assigned to a service in Section 5. Feeds the impact column of the priority matrix and is changed only through governance.
Deviation	A departure from a Must step in this manual. Recorded in the journal at the time, and reviewed at the monthly service review.
First-contact resolution	Resolved by Tier 1 with no escalation. Not the same as resolved on the first call.
Known error	A problem whose cause is understood and whose workaround is documented. See 8.3.
Latent change	A change applied under emergency conditions and recorded afterwards. Reported as a deviation.
Major incident	A declared state, not a priority. Declared by the incident manager; it may accompany a P1 or a multi-service P2.
No-contact rule	Resolution after two recorded chases at least one working day apart with no requester response. See 3.5.
Problem	The underlying cause of one or more incidents. Not necessarily understood yet. See 8.1.
Reopen	A resolved incident returned to In Progress within five working days. Counted in Section 12.
Resolver group	A team that accepts escalations within its service scope. Listed in 4.2 and in the service catalogue.
Service owner	Accountable for a service in Section 5. Approves emergency changes against it and signs post-incident reviews.
Standard change	A pre-approved change whose procedure is documented and unchanged. Listed in 10.2.
Suggested response	A draft written by the pilot in Section 11. A candidate, never an action.
Workaround	A documented way to restore service without fixing the cause. Applying one resolves the incident and leaves the problem open.

Appendix B · Templates

B.1 Escalation handover

Paste into the work note when escalating. A resolver group may reject an escalation that does not carry these five things.

```
ESCALATION — <group>

Symptom      : what the requester reports, in their words
Scope        : one user / a team / a floor / the whole service
Started       : when, and what changed at that time
Checked       : what you tried, with the article numbers
Ruled out     : what it is not, and how you know
Requester     : name, location, contactable until
Priority      : P<n>, derived from impact <n> and urgency <n>
```

B.2 Requester update

For Additional comments. Three sentences: what is happening, what you need, when they will next hear from you.

```
Hello <name>,

<What is happening, in their language. No host names, no group names.>
<What you need from them, if anything, and by when.>
<When they will hear from you next. Give a time, not "shortly".>

<Your name>
BARQ Service Desk · <incident number>
```

B.3 No-contact resolution

```
Hello <name>,

I have tried to reach you twice about this and have not been able to,
so I am closing it for now. Nothing is lost — reply to this message or
quote <incident number> and it will reopen with its history intact.

<Your name>
BARQ Service Desk · <incident number>
```

B.4 Knowledge article proposal

Raise against the *Knowledge — new article* catalogue item. The knowledge manager will not publish a proposal that omits the cause; a procedure with no cause behind it is a habit, not knowledge.

Title	The symptom as a requester would report it, not the fix
Service and category	From the catalogue in Section 5
Symptom	What the requester sees. Include the exact error text if there is one
Cause	Why it happens. Required — a proposal without this is returned
Resolution	Numbered steps, each a single action a Tier 1 analyst can perform

Escalation	When to stop and who to send it to
Evidence	At least two incident numbers where this pattern occurred

Appendix C · Impact and urgency worksheet

Use this when the priority is disputed. Answer both columns, then read the priority off the matrix in 3.3.

IMPACT — HOW MANY, AND HOW BADLY	URGENCY — HOW FAST IT DEGRADES
▪ 1 – Enterprise. A whole service is unavailable, or an entire site is affected. ▪ 2 – Department. A team, a floor or a business function cannot work. ▪ 3 – Individual. One person is affected, or a small number with a workaround.	▪ 1 – High. Work stops now, or a deadline inside four hours is at risk. ▪ 2 – Medium. Work is degraded but continuing, or a deadline today is at risk. ▪ 3 – Low. Inconvenient. A workaround exists and is acceptable for now.
Count people who cannot work , not people who noticed.	Urgency is about the rate of harm, not about who is asking.

The two questions that settle most disputes

Is there a workaround the requester can use today? If yes, urgency is rarely 1, whatever the pressure on the call.

Would a second person report this independently? If yes, impact is rarely 3, even though only one person has called.

Appendix D · Directory

Names and roles as at the edition date. Extension numbers and the on-call rota are maintained in the ticketing system and are authoritative there; this table is for routing, not for dialling.

GROUP	ROLE	NAME	COVERS	OUT OF HOURS
Service management	Service Delivery Manager	N. Abdelrahman	All services	On-call rota
	Service Desk Team Lead	O. Sabry	Tier 1, both sites	Extended hours
	Problem Manager	D. Halim	Problem and known error registers	Working hours
	Knowledge Manager	H. Moawad	Section 6, article lifecycle	Working hours
	Change Manager	Y. Naguib	CAB, emergency approvals	On-call rota
Service owners	Head of Platform Engineering	K. Selim	order-processing, sap-erp	On-call rota
	Network Operations Lead	L. Haddad	corporate-vpn, corporate-wifi, file-services	On-call rota
	Identity & Access Lead	N. Abdelrahman	identity	On-call rota
	Collaboration Services Lead	O. Sabry	corporate-email	Extended hours
	Endpoint Engineering Lead	D. Halim	endpoint, print-services	Working hours

Appendix E · Identifier index

Every record identifier used in this manual, against the sections it appears in. Search the ticketing system for the live record; this index tells you where the context is written down.

IDENTIFIER	WHAT IT IS	SECTIONS
KB0001	VPN authentication fails after a password change	5.2, 6.1, 6.4, 7.2, 10.2, 11.5
KB0002	Outlook shows Disconnected and no mail is delivered	3.2, 5.2, 6.1, 6.5
KB0003	Mapped shared drive is missing after sign-in	5.2, 6.1, 6.6, 8.3
KB0004	Print jobs queue but nothing prints	5.2, 6.1, 6.7, 7.3, 10.2
KB0005	Account is locked after repeated failed sign-ins	5.2, 6.1, 6.3, 6.8, 7.4, 8.3, 10.2
KB0006	Multi-factor authentication after a lost or replaced device	6.1, 6.9
KB0007	Laptop performance degrades after a system update	5.2, 6.1, 6.10
KB0008	SAP GUI connection times out	5.2, 6.1, 6.11, 8.3
KB0009	Wi-Fi drops on the 5 GHz corporate network	5.2, 6.1, 6.12, 8.3, 10.2
KB0010 v1	Order service pool exhaustion — retired, do not apply	6.1, 6.13, 9.2, 9.5, 9.6
KB0010 v2	Order service pool exhaustion — current	5.2, 6.1, 6.13, 7.5, 10.2
INC0009884	The 14 March order-processing incident	9.1, 9.3
INC0010023	VPN authentication failure, 08 Sep 2026	7.1, 7.2, 11.5
INC0010047	Meeting room 4 printer, mechanical fault	7.3, 11.4
INC0010052	Order service pool saturation, 08 Sep 2026	7.5, 10.4
INC0010064	Three symptoms, one lockout	7.4
PRB0040012	Repeat lockouts from cached mobile credentials	7.4, 8.2, 8.3, 10.2
PRB0040018	Connection lifetime defect on order-processing	7.5, 8.2, 9.6
PRB0040021	5 GHz roaming drops, floors 3 and 4	5.2, 8.2, 10.2
PRB0040026	Post-update endpoint degradation on one model	8.2
PRB0040029	Third-floor print queue stalls	8.2, 8.3
KE0000034	SAP connection profile names a decommissioned server	5.2, 8.3
KE0000041	Drive mapping absent although the path is reachable	8.3
KE0000047	Account re-locks within minutes of an unlock	8.3
KE0000052	Wireless drops while roaming	8.3
KE0000055	Print queue stalls after a spooler restart	8.3
CHG0030401	Spooler restart and queue clear — standard	10.2

IDENTIFIER	WHAT IT IS	SECTIONS
CHG0030418	Cached credential clear — standard	10.2
CHG0030422	Account unlock after verification — standard	10.2
CHG0030455	Order service pool drain — standard procedure, emergency authorisation	6.13, 7.5, 9.3, 9.6, 10.2, 10.4
CHG0030470	Wireless driver update on one endpoint — standard	10.2
CHG0030588	Wireless controller firmware	8.2, 8.3
CHG0030602	Login script rewrite	8.3
RITM0010877	MFA reset request	1.2, 6.9
MIR-2026-03	Order processing unavailable, 14 March 2026	6.13, 7.5, 9, 10.2

End of manual. Edition 4.0, published 11 August 2026. Next scheduled review 10 August 2027.