



Introduction

Chapter 1

Computer System Structure

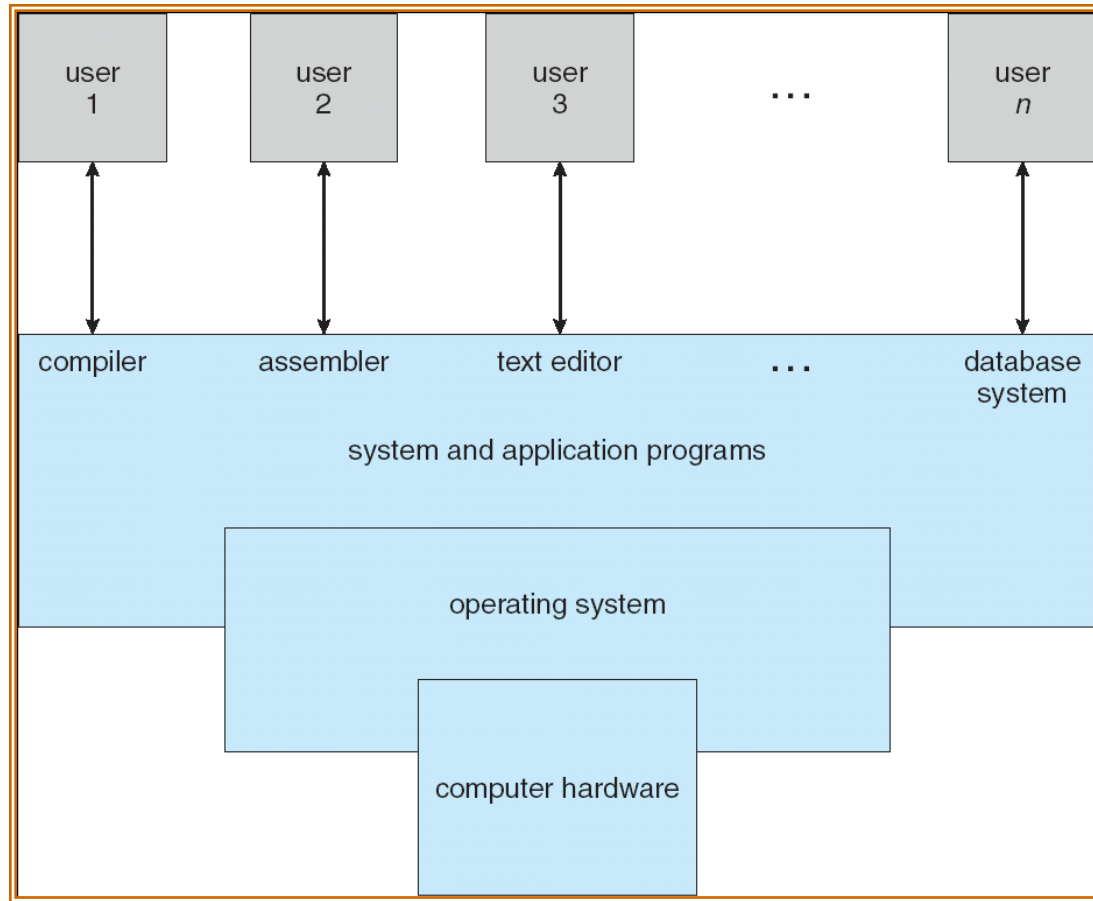

Computer Abstraction layers

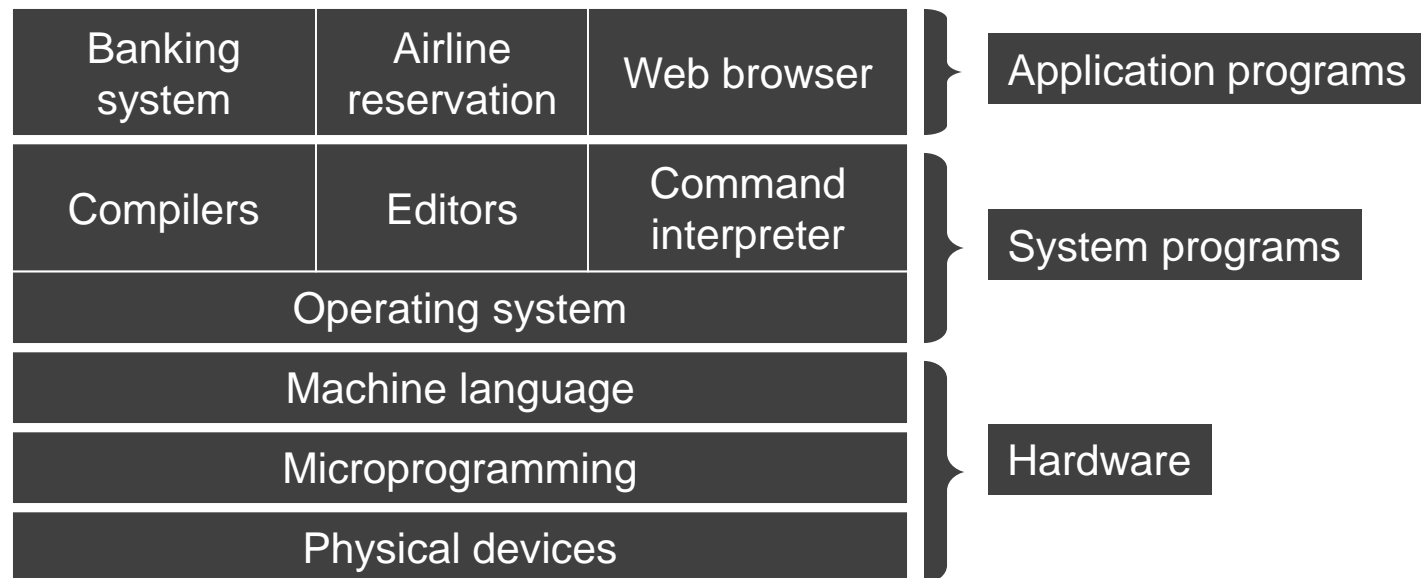

Operating System

- A program that acts as an intermediary between a user of a computer and the computer hardware.
- Use the computer hardware in an efficient manner.
- Provides a set of services to system users

Operating System Objectives

- ***Convenience***
 - Makes the computer more convenient to use
- ***Efficiency***
 - Allows computer system resources to be used in an efficient manner
- ***Ability to evolve***
 - Permit effective development, testing, and introduction of new system functions without interfering with service

Operating System Definition

- No universally accepted definition
- OS is a **resource allocator**
 - Manages all resources
 - Decides between conflicting requests for efficient and fair resource use
- OS is a **control program**
 - Controls execution of programs to prevent errors and improper use of the computer


Operating System Definition (Cont.)

- “The one program running at all times on the computer” is the **kernel**.
 - Contains most-frequently used functions
 - May be ***static*** or ***dynamic***
- Everything else is either a system program or an application program

Computer Startup

- **bootstrap program** is loaded at power-up or reboot
 - Typically stored in ROM or EPROM, generally known as **firmware**
 - Initializes all aspects of system
 - Loads operating system kernel and starts execution


Computer System Organization

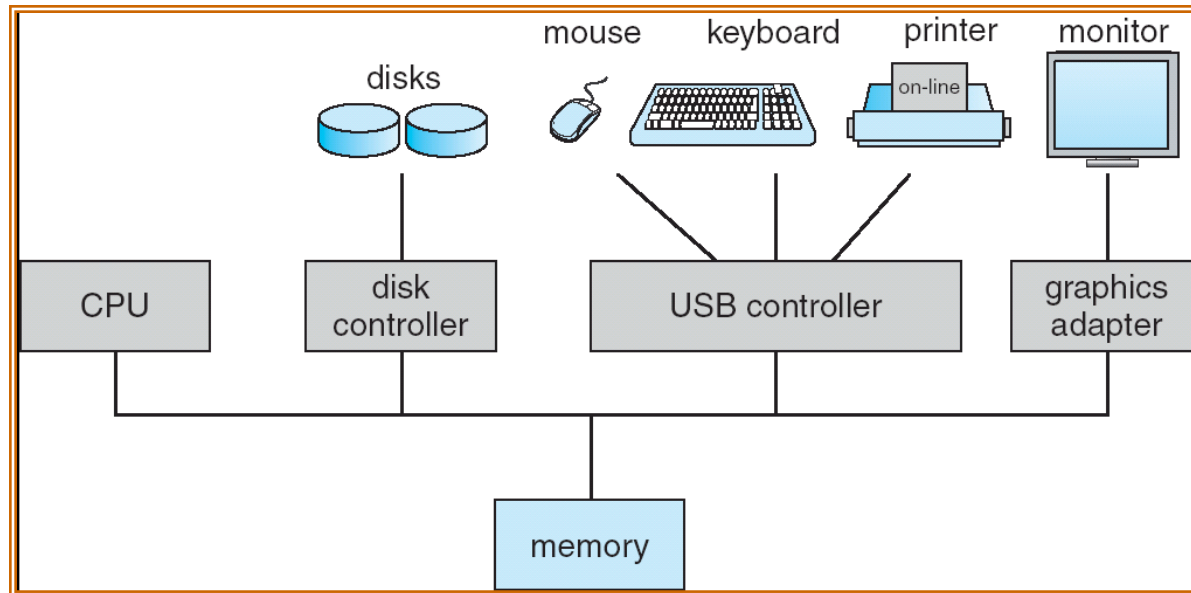


Computer-System Operation

- I/O devices and the CPU can execute concurrently.
- Each device controller is in charge of a particular device type.
- Each device controller has a local buffer.
- CPU moves data from/to main memory to/from local buffers
- I/O is from the device to local buffer of controller.
- Device controller informs CPU that it has finished its operation by causing an *interrupt*.


Instruction Cycle

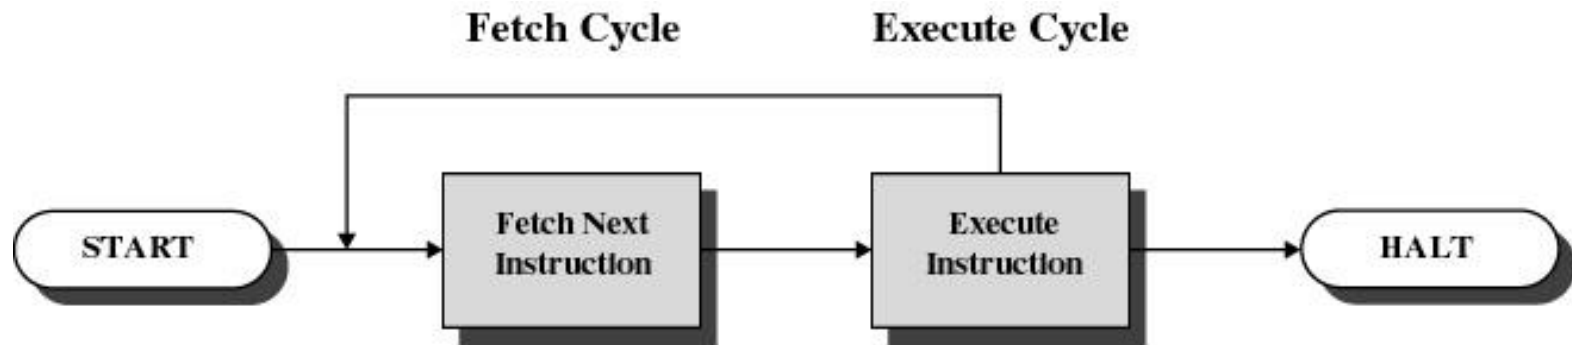


Interrupt Cycle

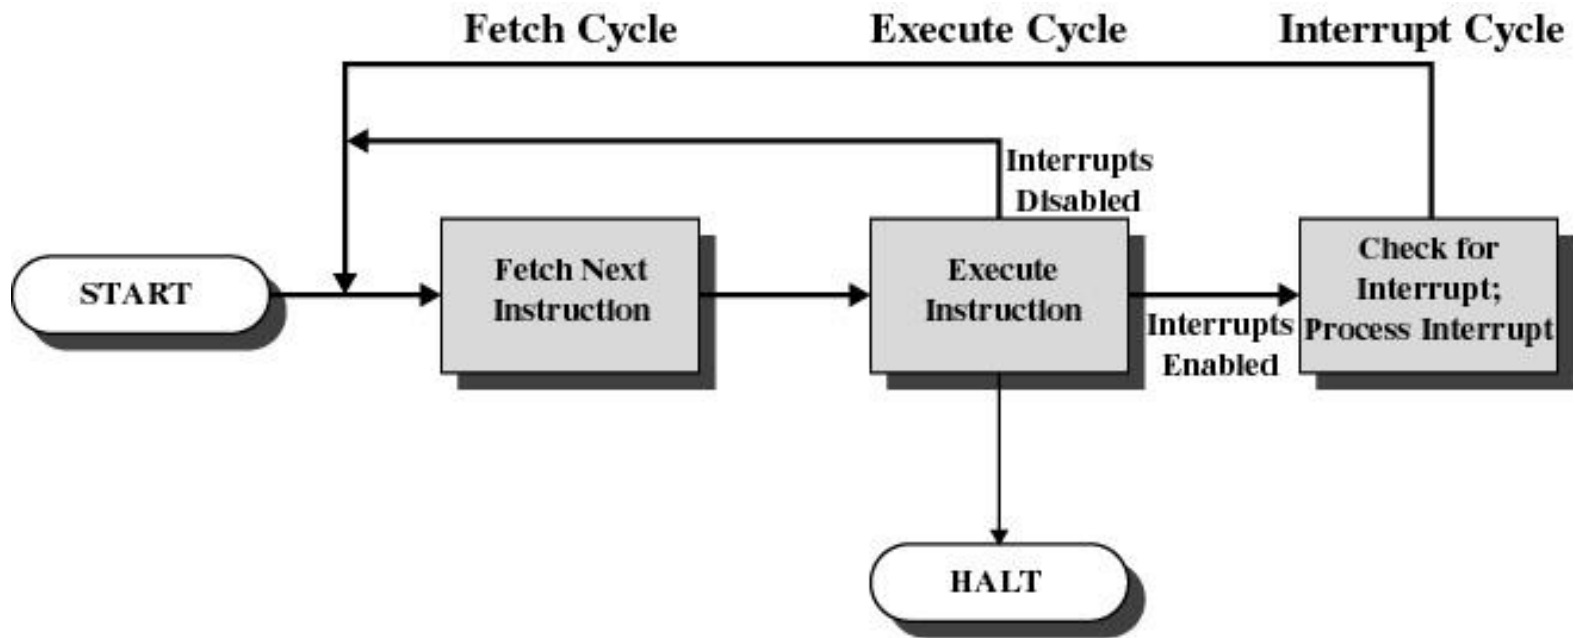

Interrupt Processing

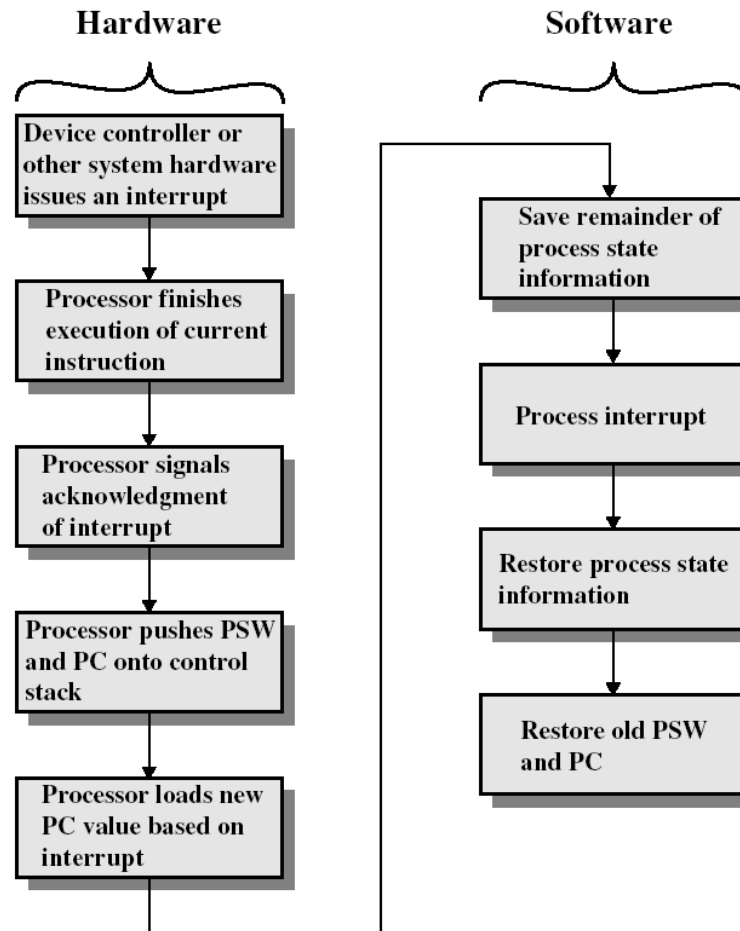


Two I/O Methods

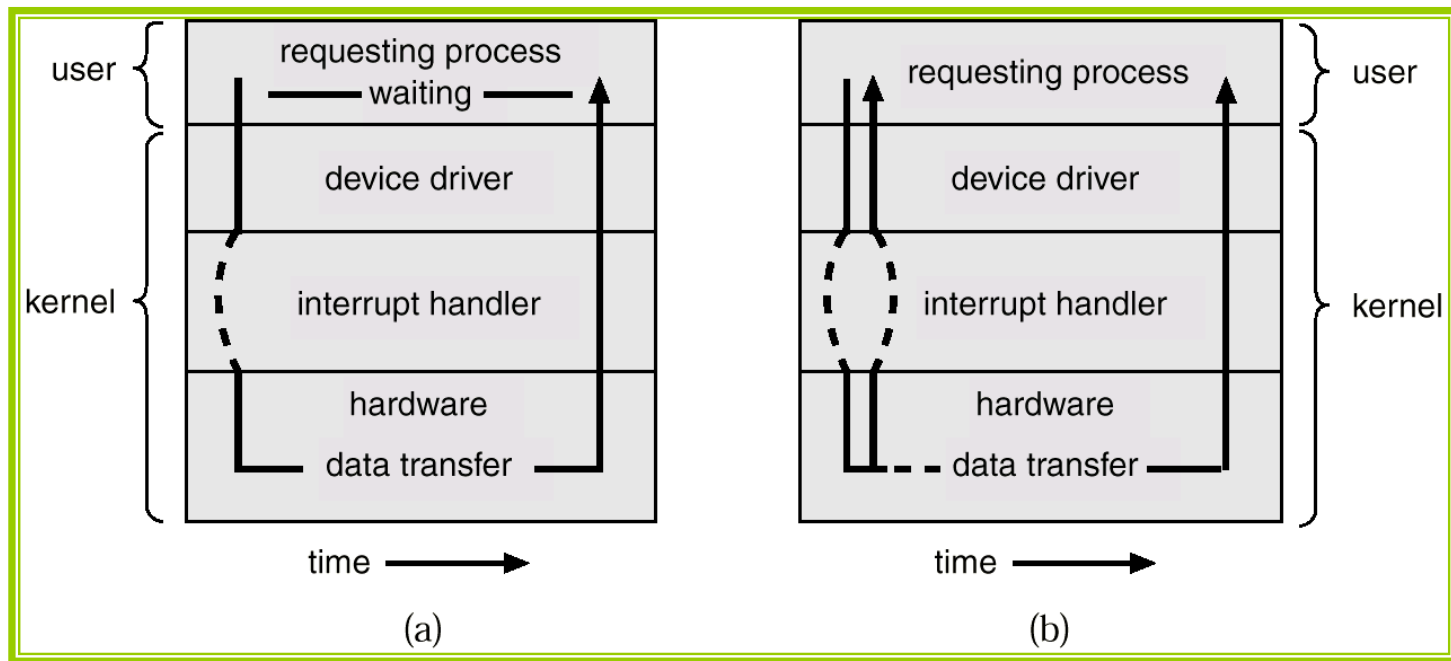


Multiprogramming

- needed for efficiency

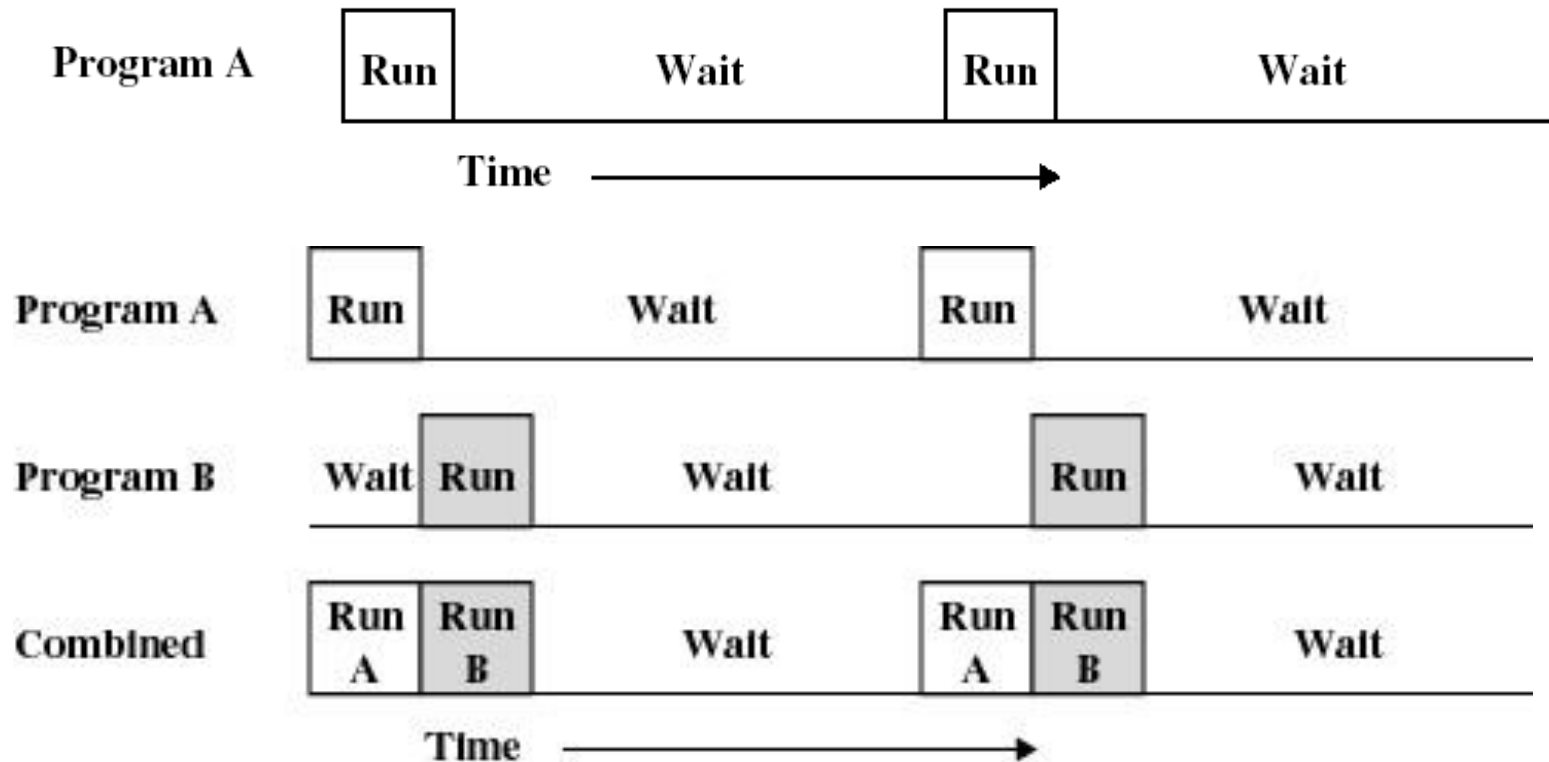

Memory Layout for Multiprogrammed System

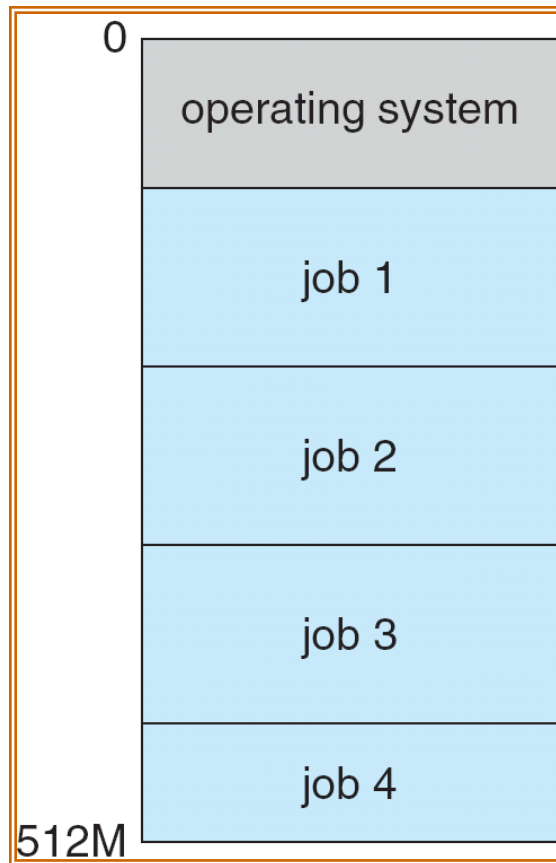

Timesharing (multitasking)

- is logical extension in which CPU switches jobs so frequently that users can interact with each job while it is running, creating **interactive** computing
 - **Response time** should be < 1 second
 - Each user has at least one program executing in memory \Rightarrow **process**
 - If several jobs ready to run at the same time \Rightarrow **CPU scheduling**
 - If processes don't fit in memory, **swapping** moves them in and out to run
 - **Virtual memory** allows execution of processes not completely in memory

Operating-System Operations


- Interrupt driven by hardware
- Software error or request creates **exception** or **trap**
 - Division by zero, request for operating system service
- Other process problems include infinite loop, processes modifying each other or the operating system

Dual-mode operation

- allows OS to protect itself and other system components
 - **User mode** and **kernel mode**
 - **Mode bit** provided by hardware
 - Provides ability to distinguish when system is running user code or kernel code
 - Some instructions designated as privileged, only executable in kernel mode
 - System call changes mode to kernel, return from call resets it to user

Transition from User to Kernel Mode


- Timer to prevent infinite loop / process hogging resources
 - Set interrupt after specific period
 - Operating system decrements counter
 - When counter zero generate an interrupt
 - Set up before scheduling process to regain control or terminate program that exceeds allotted time

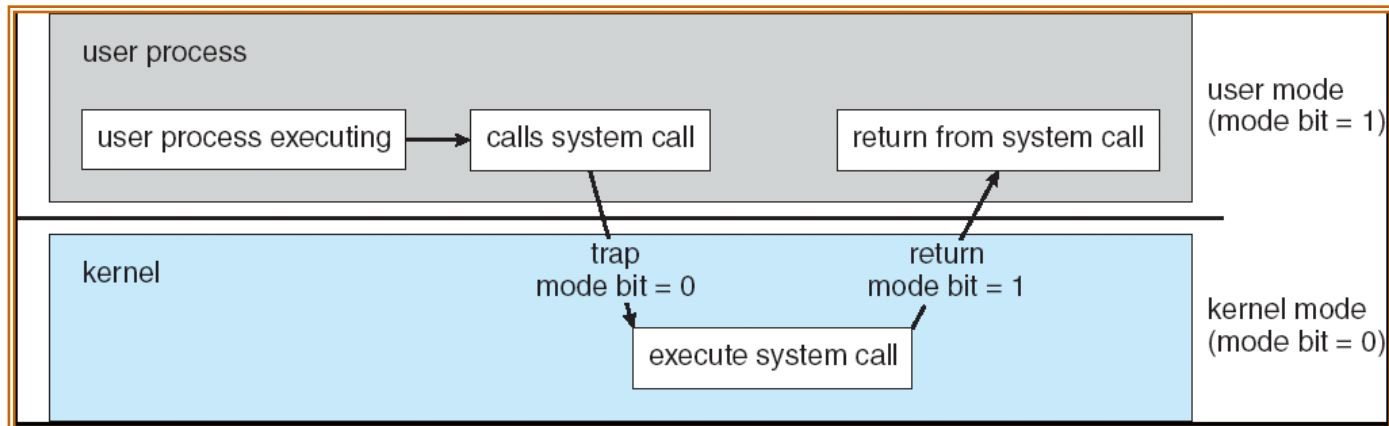

Major Achievements

- Processes
- Memory Management
- Information protection and security
- Scheduling and resource management
- System structure

Operating Systems Evolution

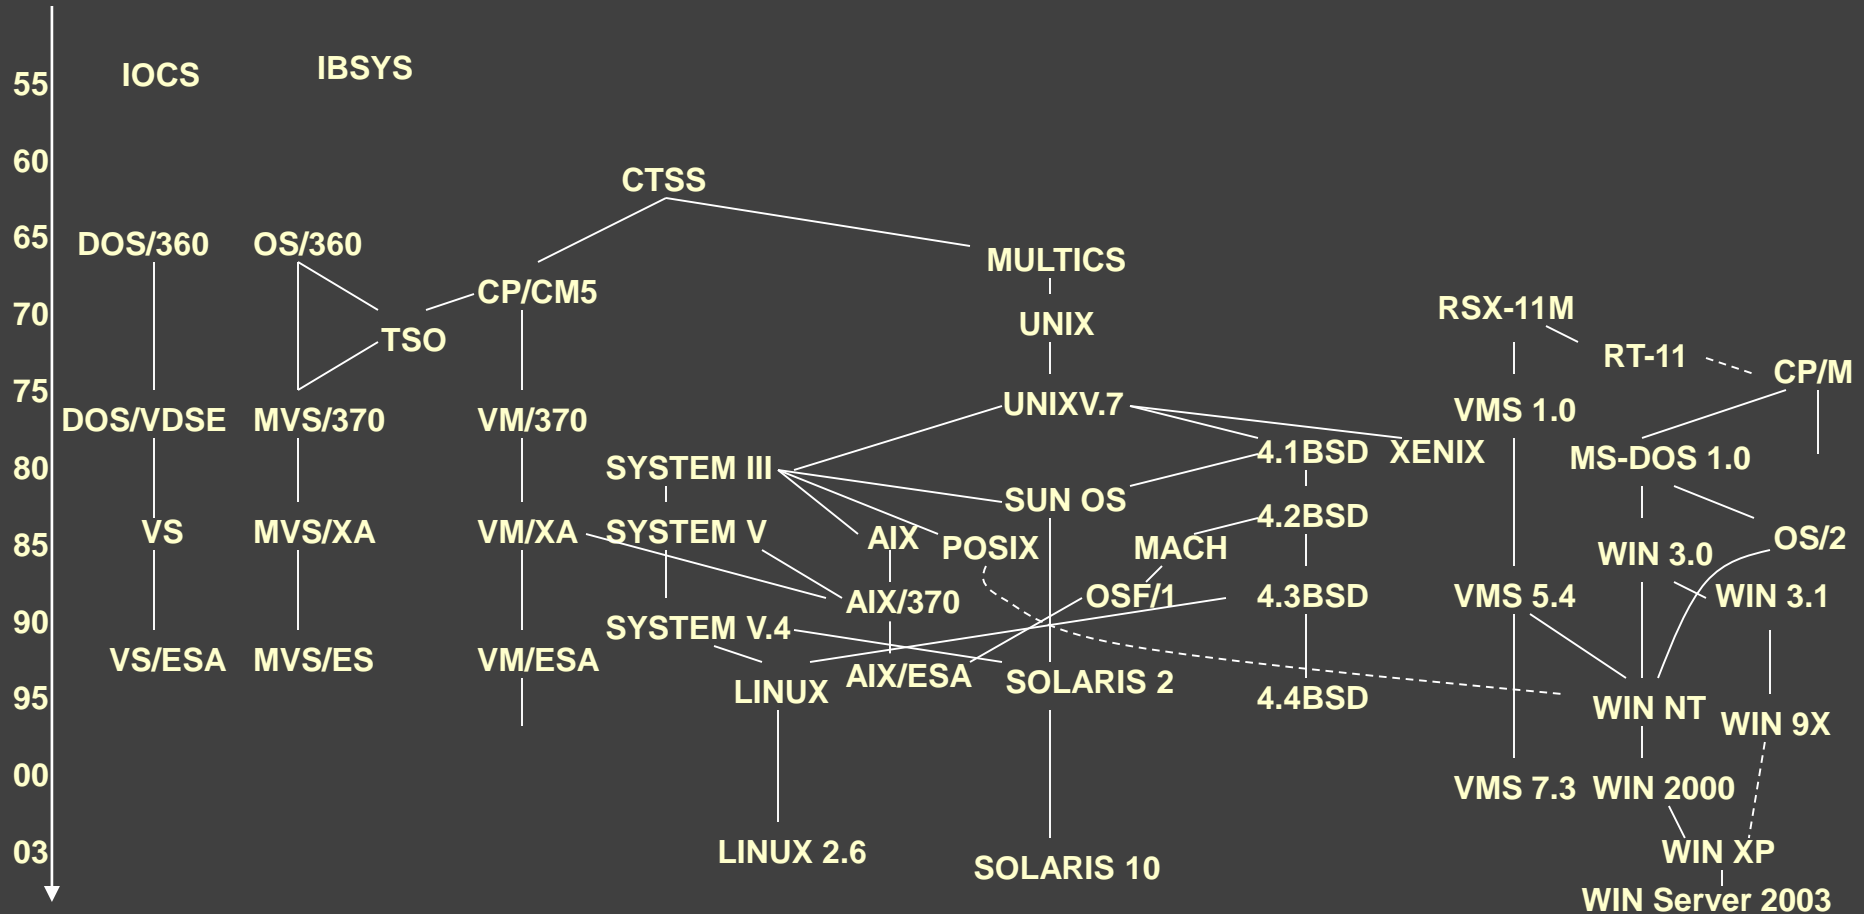

Process Management

- A process is a program in execution. It is a unit of work within the system. Program is a *passive entity*, process is an *active entity*.
- Process needs resources to accomplish its task
 - CPU, memory, I/O, files
 - Initialization data
- Process termination requires reclaim of any reusable resources

Process Management (cont.)

- **Single-threaded** process has one **program counter** specifying location of next instruction to execute
 - Process executes instructions sequentially, one at a time, until completion
- **Multi-threaded** process has one program counter per thread
- Typically system has many processes, some user, some operating system running concurrently on one or more CPUs
 - Concurrency by multiplexing the CPUs among the processes / threads

Process Management Activities

- The operating system is responsible for the following activities in connection with process management:
 - Creating and deleting both user and system processes
 - Suspending and resuming processes
 - Providing mechanisms for process synchronization
 - Providing mechanisms for process communication
 - Providing mechanisms for deadlock handling

Memory Management

- Memory management activities
 - Keeping track of which parts of memory are currently being used and by whom
 - Deciding which processes (or parts thereof) and data to move into and out of memory
 - Allocating and deallocating memory space as needed
 - Process isolation
 - Protection and access control

Storage Management

- OS provides uniform, logical view of information storage
 - Abstracts physical properties to logical storage unit - **file**
 - Each medium is controlled by device (i.e., disk drive, tape drive)
 - Varying properties include access speed, capacity, data-transfer rate, access method (sequential or random)
- File-System management
 - Files usually organized into directories
 - Access control on most systems to determine who can access what
 - OS activities include
 - Creating and deleting files and directories
 - Primitives to manipulate files and dirs
 - Mapping files onto secondary storage
 - Backup files onto stable (non-volatile) storage media

Mass-Storage Management

- Usually disks used to store data that does not fit in main memory or data that must be kept for a “long” period of time.
- Proper management is of central importance
- Entire speed of computer operation hinges on disk subsystem and its algorithms
- OS activities
 - Free-space management
 - Storage allocation
 - Disk scheduling
- Some storage need not be fast
 - Tertiary storage includes optical storage, magnetic tape
 - Still must be managed
 - Varies between WORM (write-once, read-many-times) and RW (read-write)

I/O Subsystem

- One purpose of OS is to hide peculiarities of hardware devices from the user
- I/O subsystem responsible for
 - Memory management of I/O including buffering, caching, spooling
 - General device-driver interface
 - Drivers for specific hardware devices

Protection and Security

- **Protection** – any mechanism for controlling access of processes or users to resources defined by the OS
- **Security** – defense of the system against internal and external attacks
 - Huge range, including denial-of-service, worms, viruses, identity theft, theft of service

Protection and Security (cont.)

- Systems generally first distinguish among users, to determine who can do what
 - **User identities** (user IDs, security IDs) include name and associated number, one per user
 - **User ID** is then associated with all files, processes of that user to determine access control
 - **Group identifier** (group ID) allows set of users to be defined and controls managed, then also associated with each process, file
 - **Privilege escalation** allows user to change to effective ID with more rights

Computing Environments

- Traditional computer
 - Blurring over time
 - Office environment
 - PCs connected to a network, terminals attached to mainframe or minicomputers providing batch and timesharing
 - Now portals allowing networked and remote systems access to same resources
 - Home networks
 - Used to be single system, then modems
 - Now firewalled, networked

Computing Environments - Traditional

- Stand-alone general purpose machines
- But blurred as most systems interconnect with others (i.e. the Internet)
- **Portals** provide web access to internal systems
- **Network computers** (**thin clients**) are like Web terminals
- Mobile computers interconnect via **wireless networks**
- Networking becoming ubiquitous – even home systems use **firewalls** to protect home computers from Internet attacks

Computing Environments - Mobile

- Handheld smartphones, tablets, etc
- What is the functional difference between them and a “traditional” laptop?
- Extra feature – more OS features (GPS, gyroscope)
- Allows new types of apps like ***augmented reality***
- Use IEEE 802.11 wireless, or cellular data networks for connectivity
- Leaders are **Apple iOS** and **Google Android**


Computing Environments – Distributed

- Distributed
 - Collection of separate, possibly heterogeneous, systems networked together
 - **Network** is a communications path, **TCP/IP** most common
 - **Local Area Network (LAN)**
 - **Wide Area Network (WAN)**
 - **Metropolitan Area Network (MAN)**
 - **Personal Area Network (PAN)**
 - **Network Operating System** provides features between systems across network
 - Communication scheme allows systems to exchange messages
 - Illusion of a single system

Computing Environments – Client-Server


n Client-Server Computing

- | Dumb terminals supplanted by smart PCs
- | Many systems now **servers**, responding to requests generated by **clients**
 - ▶ **Compute-server system** provides an interface to client to request services (i.e., database)
 - ▶ **File-server system** provides interface for clients to store and retrieve files

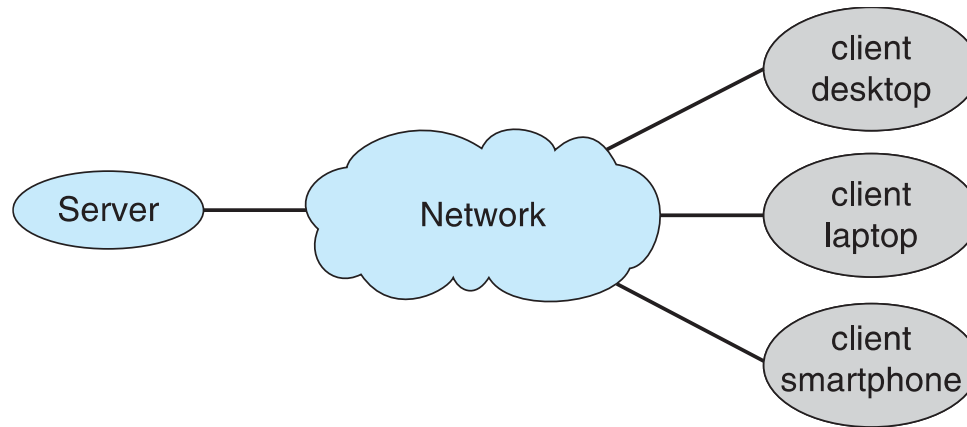

Computing Environments - Peer-to-Peer

- Another model of distributed system
- P2P does not distinguish clients and servers
 - Instead all nodes are considered peers
 - May each act as client, server or both
 - Node must join P2P network
 - Registers its service with central lookup service on network, or
 - Broadcast request for service and respond to requests for service via **discovery protocol**
 - Examples include Napster and Gnutella, **Voice over IP (VoIP)** such as Skype

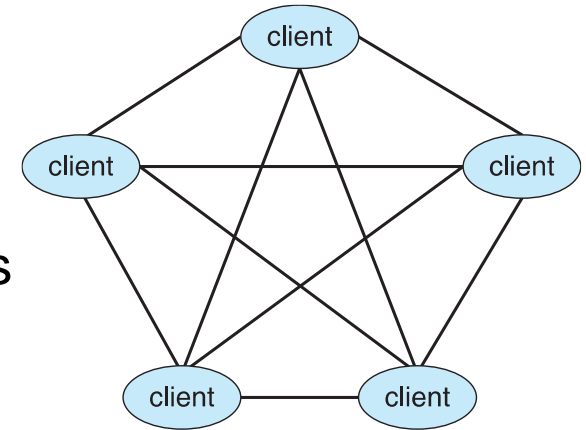


Computing Environments - Virtualization

- Allows operating systems to run applications within other OSes
 - Vast and growing industry
- **Emulation** used when source CPU type different from target type (i.e. PowerPC to Intel x86)
 - Generally slowest method
 - When computer language not compiled to native code
 - **Interpretation**
- **Virtualization** – OS natively compiled for CPU, running **guest** OSes also natively compiled
 - Consider VMware running WinXP guests, each running applications, all on native WinXP **host** OS
 - **VMM** provides virtualization services

Computing Environments - Virtualization

- Use cases involve laptops and desktops running multiple OSES for exploration or compatibility
 - Apple laptop running Mac OS X host, Windows as a guest
 - Developing apps for multiple OSES without having multiple systems
 - QA testing applications without having multiple systems
 - Executing and managing compute environments within data centers
- VMM can run natively, in which case they are also the host
 - There is no general purpose host then (VMware ESX and Citrix XenServer)

Computing Environments - Virtualization

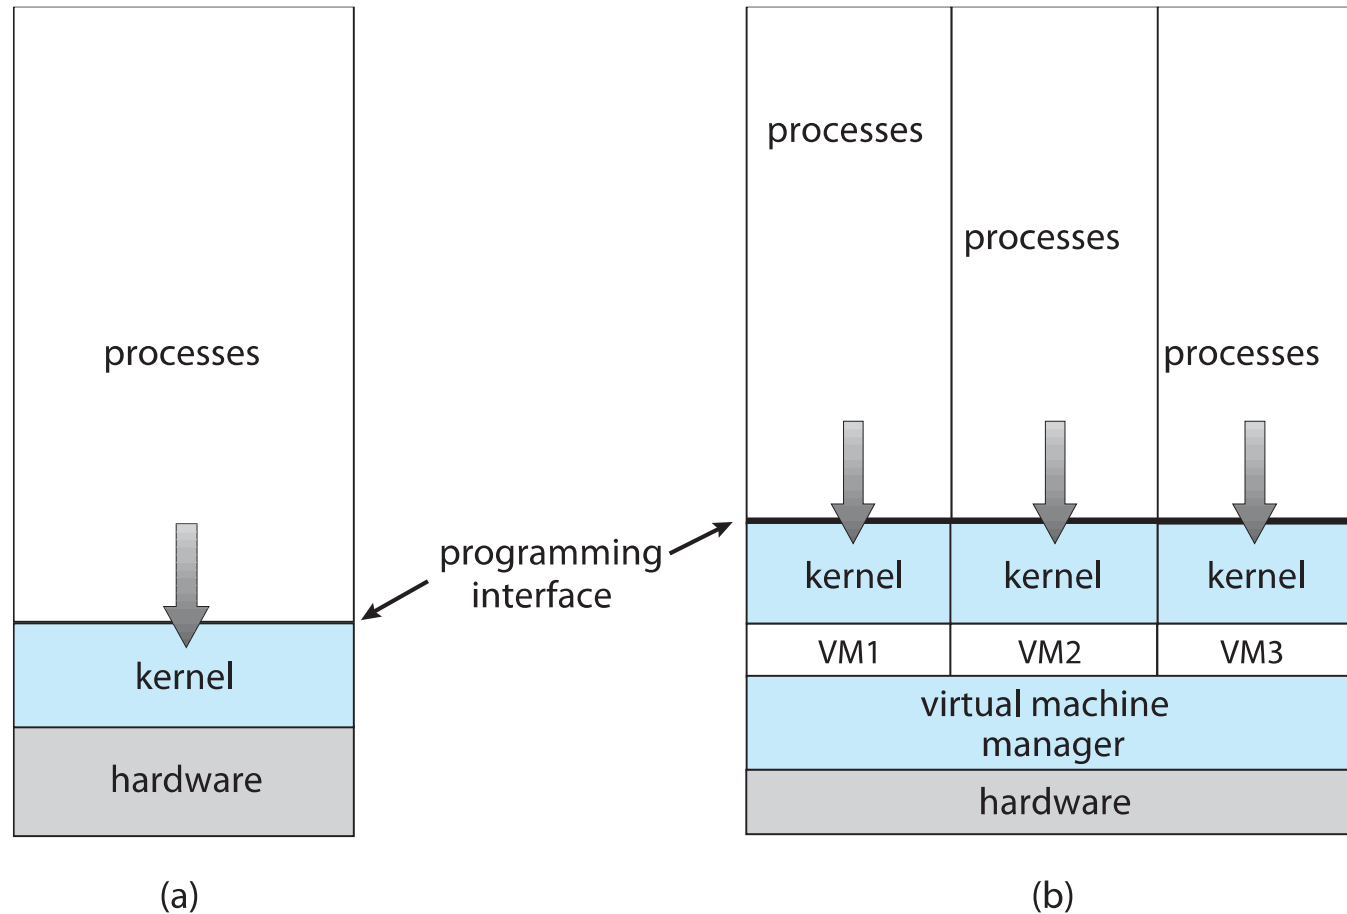


Computing Environments – Cloud Computing

- Delivers computing, storage, even apps as a service across a network
- Logical extension of virtualization as based on virtualization
 - Amazon **EC2** has thousands of servers, millions of VMs, PBs of storage available across the Internet, pay based on usage
- Many types
 - **Public cloud** – available via Internet to anyone willing to pay
 - **Private cloud** – run by a company for the company's own use
 - **Hybrid cloud** – includes both public and private cloud components
 - Software as a Service (**SaaS**) – one or more applications available via the Internet (i.e. word processor)
 - Platform as a Service (**PaaS**) – software stack ready for application use via the Internet (i.e a database server)
 - Infrastructure as a Service (**IaaS**) – servers or storage available over Internet (i.e. storage available for backup use)

Computing Environments – Cloud Computing

- Cloud compute environments composed of traditional OSES, plus VMMs, plus cloud management tools
 - Internet connectivity requires security like firewalls
 - Load balancers spread traffic across multiple applications

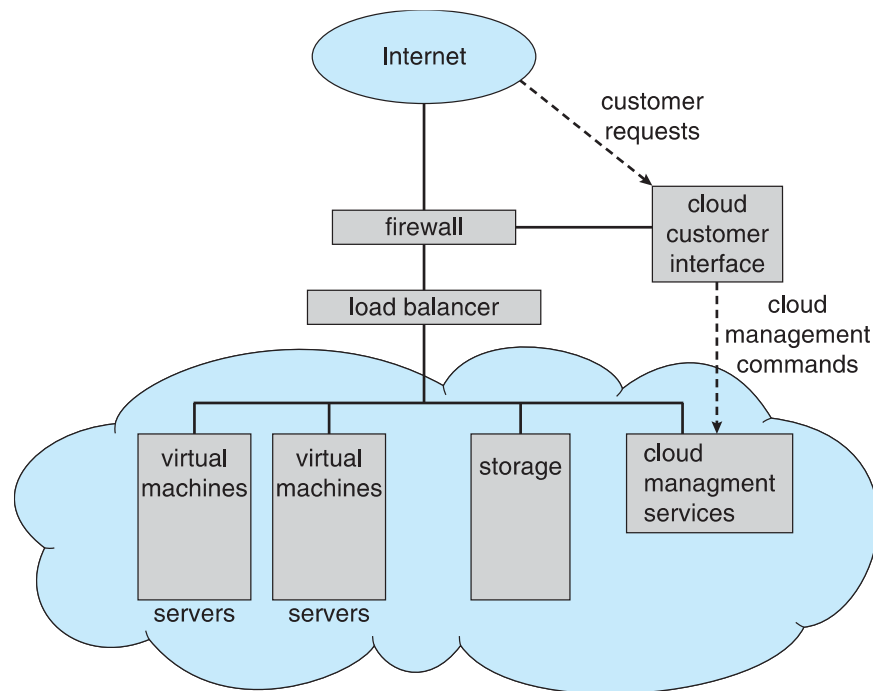

Computing Environments – Real-Time Embedded Systems

- Real-time embedded systems most prevalent form of computers
 - Vary considerable, special purpose, limited purpose OS, **real-time OS**
 - Use expanding
- Many other special computing environments as well
 - Some have OSes, some perform tasks without an OS
- Real-time OS has well-defined fixed time constraints
 - Processing **must** be done within constraint
 - Correct operation only if constraints met

Open-Source Operating Systems

- Operating systems made available in source-code format rather than just binary **closed-source**
- Counter to the **copy protection** and **Digital Rights Management (DRM)** movement
- Started by **Free Software Foundation (FSF)**, which has “copyleft” **GNU Public License (GPL)**
- Examples include **GNU/Linux** and **BSD UNIX** (including core of **Mac OS X**), and many more
- Can use VMM like VMware Player (Free on Windows), Virtualbox (open source and free on many platforms - <http://www.virtualbox.com>)
 - Use to run guest operating systems for exploration